



LSC is simple and reliable switch for level detection. It can be used for small or long range of storage tanks and reservoirs. Polypropylene rigid construction provides prevention from corrosion. Float tilt with liquid in rise & fall condition, accordingly micro switch operates from NO (Normally Open) to NC (Normally Close) position. It can be used as a multipoint switch also.

Features:


- Hermetically sealed / molded
- Adjustable counter weight
- Micro switch operated
- Easy installation
- Non toxic

Application:

- Sewage & water treatment plant
- Storage tanks
- Automatic pump control utilities

Specification:

Material of float & counter weight	Polypropylene
Cable material	: PVC
Cable length	: 3 meter
Enclosure	: IP 68
Mounting	: Vertical
Switch type	: SPDT
Electrical rating	: 16 A 250 VAC
Max. Operating pressure	: 4 bar
Max. Operating temperature	: Up to 60° C
Min. Specific Gravity	: 0.7

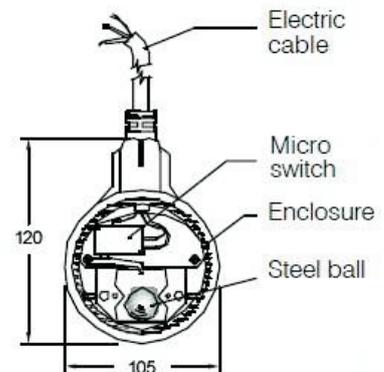

How To Order : Basic Model : LSC

Example

Cable length 03

03: 3 meter **05**: 5 meter **10**: 10 meter **20**: 20 meter

Model code Example. LSC-03.

Note:

- Model code mentioned in Example is our standard specification.
- or any other custom requirement please mention in bracket "[]".

Note : Specifications and dimensions given in this product catalogue represents the state of engineering at the time of printing .
Modifications may take place and materials specified may be replaced by others without prior notice.