



TOUCH

WALL WATER FAN COIL UNIT




1.24 kW
4.00 kW


2.00 kW
8.28 kW


234 m³/h
620 m³/h



TOUCH



Quality and design: the new wall-mounted water fancoil TOUCH

With a tangential fan that offers the maximum acoustic comfort, the wall-mounted water fancoil units of the new range TOUCH are the ideal solution to be installed in residential and office buildings.

The modern aesthetics and the innovative technical features make TOUCH the ideal solution for quality and room enhancement.

Capacity regularity

Thanks to the range with four different sizes, the new wall-mounted fancoil TOUCH allows to regularly cover capacities going from 1.2 kW to 4.0 kW

Attractive design

An attractive design and modern shapes make TOUCH perfect to be installed in residential and office buildings where comfort and enhance of the environment are the most important aspects to be considered.

TOUCH range is an extremely elegant product thanks to its aesthetic quality, innovations and top performances.


Acoustic comfort

The dedicated study on the different speed of the units has allowed to reach very high performances with minimum noise levels.

Valve included

An innovative solution that allows an easier installation and a reduced energy save.



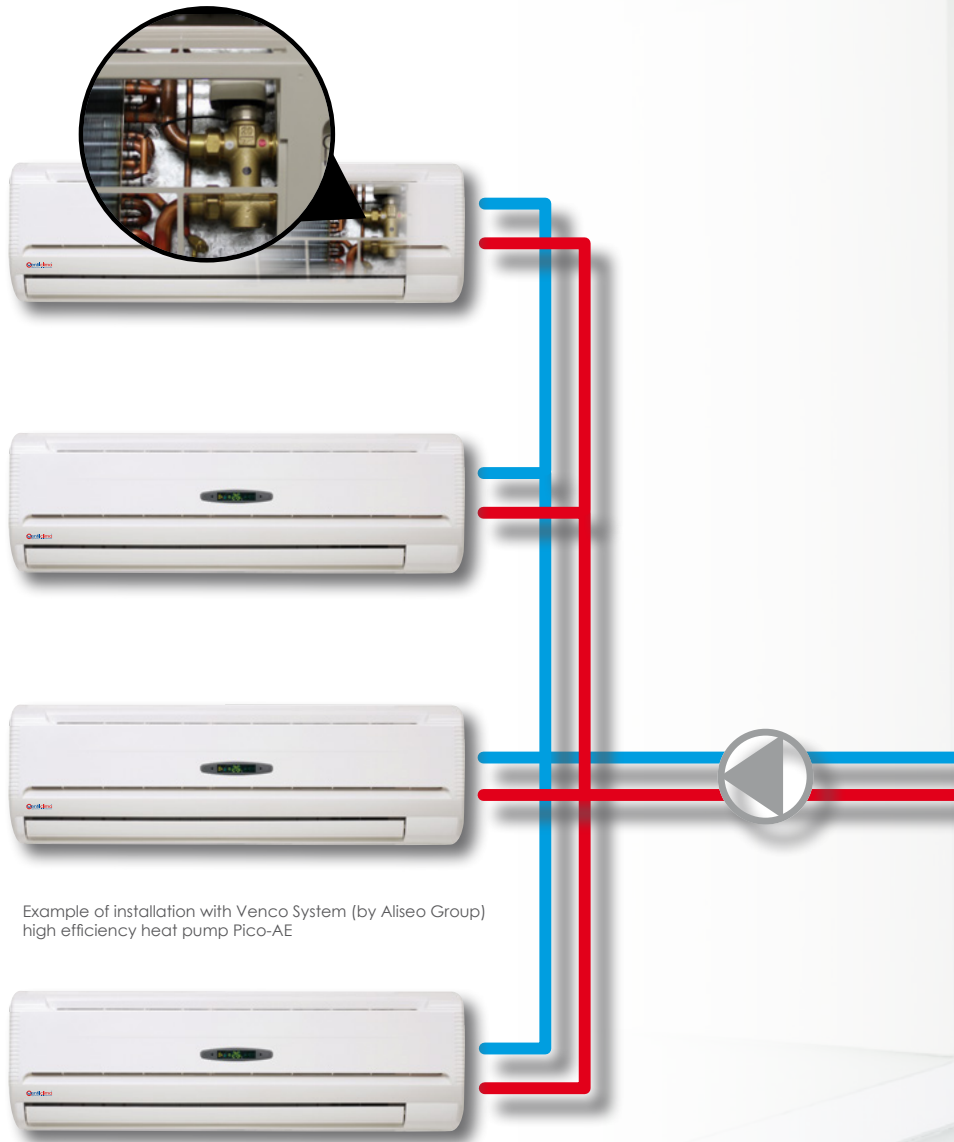

Example of installation with Venco System (by Aliseo Group) high efficiency heat pump Pico-AE



Heat exchanger coil

With copper tubes and aluminium fins, the coil has a hydrophilic treatment that allows the condensate drops to slip into the drain pan ensuring an easier air crossing and more corrosion strength of the aluminium.

The air vent is easily reachable and it discharges directly in the condensate drain pan.

Tangential fan

Designed to reach high capacities at low motor revolutions, the tangential fan guarantees a perfect union between silence and excellent per-

eco VALVE SYSTEM

Thanks to the integrated valve is possible to avoid efficiently the waste of energy, because the water flow is stopped when the unit is off, unlike normal split systems on which the flow remains even when the unit is not working. This solution also ensure easy installation and maintenance, without requiring any niche in the wall.



Remote control

Comfortable and intuitive, it has a minimal and ergonomic design that enhances its functionality and handiness.

Automatic swing

With a simple click of the remote control you can have a complete control of the air flow to suit your needs and to ensure the maximum room comfort.

Display

Integrated in the cover cabinet it shows the set-up of the unit: room temperature, fan speed and running mode.

Sleep mode

This allows you a complete relax during sleep. Activating this mode the unit sets automatically temperature and fan speed to ensure the maximum comfort, noiselessness and low cost.

Timer real time

Thanks to this feature you can program (within 24 hours), the startup and shutdown of the unit, in a completely automatic way even in your absence, so that you will find the right room comfort at your arrival.

				1	2	3	4	
	Total cooling capacity	(E) W	max	1960	2380	3340	4000	
		(E) W	med	1730	2100	2960	3640	
		(E) W	min	1550	1830	2420	2920	
	Sensible cooling capacity	(E) W	max	1610	1900	2680	3130	
		(E) W	med	1410	1640	2320	2850	
		(E) W	min	1240	1410	1890	2260	
	Water flow		l/h	max	336	409	573	686
			l/h	med	297	359	508	625
			l/h	min	266	314	415	501
Water pressure drop	(E) kPa	max	15,9	22,9	17,4	21,6		
	(E) kPa	med	12,5	18,3	13,3	17,8		
	(E) kPa	min	10,0	14,3	11,4	11,8		
Heating capacity	(E) W	max	2570	2970	4390	4920		
	(E) W	med	2240	2610	3800	4450		
	(E) W	min	2000	2280	3000	3860		
	Water flow		l/h	max	336	409	573	686
			l/h	med	297	359	508	625
			l/h	min	266	314	415	501
Water pressure drop	(E) kPa	max	15,0	20,5	17,3	19,8		
	(E) kPa	med	11,6	16,4	13,8	15,9		
	(E) kPa	min	9,3	13,0	8,3	10,6		
Heating capacity	W	max	4390	5030	7480	8280		
	W	med	3810	4400	6450	7500		
	W	min	3390	3850	5070	6540		
	Water flow		l/h	max	386	442	657	727
			l/h	med	334	386	566	659
			l/h	min	298	338	445	574
Water pressure drop		kPa	max	18,4	22,4	21,1	21,2	
		kPa	med	13,8	17,7	16	16,9	
		kPa	min	10,9	14,1	8,8	13,1	
Air flow		m³/h	max	344	417	553	620	
		m³/h	med	282	333	476	544	
		m³/h	min	234	273	375	426	
Sound power level	(E) db(A)	max	53	54	54	56		
	(E) db(A)	med	50	50	50	52		
	(E) db(A)	min	47	45	43	45		
Sound pressure level	db(A)	max	45	45	45	48		
	db(A)	med	41	41	41	44		
	db(A)	min	38	37	34	37		
Power supply	230V 50Hz							
Power input	(E) W	max	29	29	48	51		
	(E) W	med	26	27	42	45		
	(E) W	min	25	25	35	35		
Absorbed current	A	max	0,13	0,13	0,26	0,30		
	A	med	0,12	0,12	0,22	0,24		
	A	min	0,11	0,11	0,17	0,18		
Water content	L	-	0,81	0,85	1,24	1,85		

- **Standard unit with free outlet:** external static pressure = 0 Pa
- **Sound power level:** ISO 23741
- **Sound pressure level:** 8,6 dB(A) lower than the sound power level for a room of 90 m³ with a reverberation time of 0,5 sec.
- **Supported power supply:** ~230V±10% / 1ph / 50Hz



COOLING
Inlet water temp.: 7°C
Outlet water temp.: 12°C
Inlet air temp.: 27°C d.b. - 19°C w.b.



HEATING
Air temp.: 20°C
Inlet water temp.: 50°C



HEATING
Air temp.: 20°C
Inlet water temp.: 70/60°C



(E)





			1	2	3	4
Dimensions	L	mm	880	990	1172	1172
	H	mm	298	305	360	360
	P	mm	205	210	220	220
Weight		kg	11.5	12.4	19	20.5

GENERAL DIMENSIONS

TOUCH 1-2

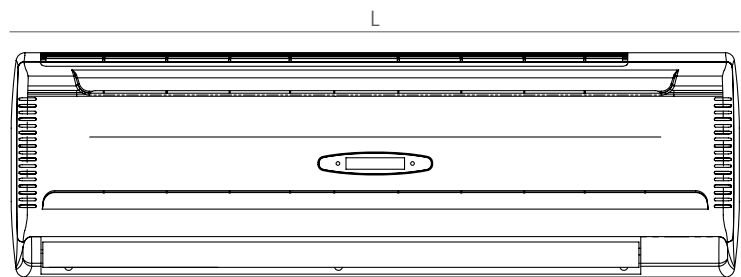


TOUCH 3-4

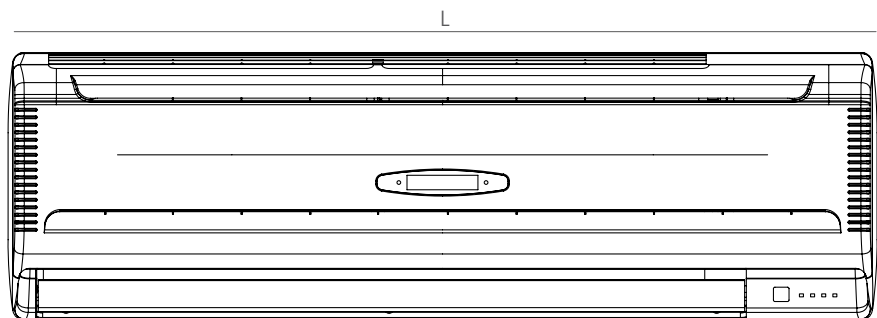


HYDRAULIC CONNECTIONS AND CONDENSATE DRAIN

TOUCH 1-2

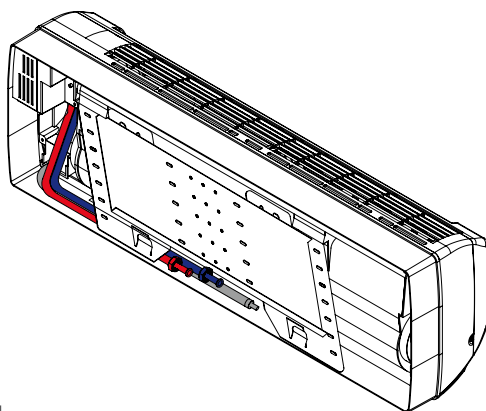

- Supply Ø 1/2"
- Return Ø 1/2"
- Condensate drain Ø 16.5 mm

TOUCH 3-4

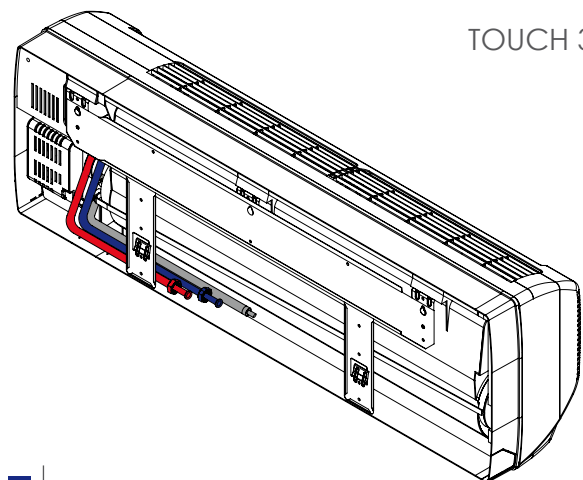

- Supply Ø 1/2"
- Return Ø 1/2"
- Condensate drain Ø 16.5 mm



**AGROUP TAKES PART TO THE EUROVENT PROGRAM
OF FAN COIL PERFORMANCE CERTIFICATION
IN ORDER TO PROVIDE ITS CUSTOMERS THE RELIABILITY
AND ACCURACY OF PERFORMANCES.**



MEKAR s.r.l. . Viale Caduti sul Lavoro 25 . 37063 ISOLA DELLA SCALA (VR)
Tel +390456630536 . Fax +39 045 6630513 info@mekar.it . www.mekar.it
Middle East Regional Office: Mekar Air Handling Units L.L.C., The Business Centre
Suite 203, Khalid Bin Walid Street, P.O. Box 24583, Dubai, U.A.E.
Tel: +971 4 3574469 Fax: +971 4 3574479 sales@mekar.ae

