


NK Instruments Pvt. Ltd. has Insertion Paddle Wheel type Flow Rate Indicator cum Totalizer with Transmitter. This type of meter has a major advantage like – Reasonable price, Very Low Pressure Drop, Easy for handling / Transportation & Installation, Quick delivery.



Field Mounted / Panel Mounted



APPLICATIONS

- Water Treatment
- Filtration Systems
- Chemical / Pharmaceutical
- Bottling / Distillery
- Concrete Batching plant
- Textile / Process machine automation

- A) —Flow Sensor,
- B) —T-fitting for Flow Sensor &
- €) —Digital Unit



NK Instruments Pvt. Ltd.

Flow Sensor are available in PP or, SS 316 construction. has open collector signal output (sink) and has a wide velocity range of 0.5 to 5 m/s (0.3 to 20 ft/s). The sensor use to measures liquid flow rates in full pipe. Sensors can be installed in 15 NB to 500 NB (0.5 to 20 inches) Line size and even bigger by using the Hot Tab Assembly

To install these sensors in process lines, specifically designed T-fittings are offered. These fittings are available in various type of T-fittings like Threaded End, Flanged End, and Weld on Adapter, Block design without pipe and Hot Tab Assembly etc. The Sensor mounting fitting is essential to for proper installation and better performance of the Flow Sensor.

The Flow Sensor for pipe line size bigger than 150 mm, we suggest to use Hot Tab Assembly for its safe installation and maintenance.

These Digital Flow Transmitters are available in Panel mounted version (model P383) and Field mounted version (model F383). The standard output from Transmitter is 4 to 20 mA, but we can also provide 2 to 10 VDC, RS232 or, RS485. Programmable scale factor with direct flow rate reading in M3/hr / LPH / LPM / LPS / GPMus / GPMuk, and totalizer reading in m3 / Liters / Gallon is available in these series of Flow Transmitters. This model has optional Relay output which can be provided to operate on Totalizer (used for Batching and Dosing application) or, on rate of flow (used as flow switch).



Address : 501-504, Raunak Arcade, Near Hotel Usha Kiran, Gokhale Road, Naupada, Thane (W) - 400602

Contact : 022-25301330/31/32 Mob. : 08108125494

Email : sales@nkinstruments.com

Website : www.nkinstruments.com

TECHNICAL SPECIFICATIONS FOR P812

Velocity Range	: 0.5 to 5 m/s (1.6 to 16.4 ft./s)
Max. % of Solids	: 1% of fluid volume, non-abrasive, non-magnetic, <100 micron in dia.& length.
Pipe Size Range	: 15 NB to 500 NB (0.5 to 20 inches), for bigger sizes with Hot Tap assembly
Linearity	: $\pm 1\%$ of full range
Repeatability	: $\pm 0.5\%$ of full range
length Min. Reynolds Number	: 4500
Sensor Body	: Polypropylene (black) or PVDF (black) SS 304 / SS 316
O-rings	: Viton / Teflon
Rotor Pin	: Hastelloy C
Rotor	: Black PVDF
Frequency	: 38 Hz per m/s nominal (11.6Hz per ft/s nominal)
Supply Voltage	: 10 to 24 VDC regulated
Supply Current	: <20 mA @ 10 to 24 VDC
Output Type	: Pulse output (NPN)
Cable Length	: 5m (16.4 ft.) standard
Operating Pressure	: PP Sensor Rod : max 6 bar (87 psi) SS Sensor Rod : Max 12 bar (175 psi)
Operating Temperature	: PP Sensor Rod : -10°C to 70°C (14°F to 158°F) SS Sensor Rod : -10°C to 100°C (14°F to 212°F)

Technical Specifications for Flow Rate Indicator / Totalizer and Transmitter (series-383)

Function	: Flow Rate Indicator cum Totalizer and Transmitter
Display	: 16 X 2 LCD display
Supply of Voltage	: 230 V AC



NK Instruments Pvt. Ltd.

Linearity	: $\pm 1\%$ of full range
Repeatability	: $\pm 0.5\%$ of full range
Input	: from Flow Sensor (P812)
Configuration Lock	: Password protection
Calibration	: Using front membrane keys
Output	: 4 to 20 mA (2 to 10 VDC, RS232 or, RS485 - Optional) Relay (On Rate of Flow or, on Total Flow - Optional)
Meter size	: 110 X 110 X 150 mm
Cutout Size	: 90 mm X 90 mm
Protection Rating	: Weatherproof to IP65

Similar Flow Transmitter is available in flameproof version also.



TYPE OF SENSOR INSTALLATION FITTINGS

Address : 501-504, Raunak Arcade, Near Hotel Usha Kiran, Gokhale Road, Naupada, Thane (W) - 400602

Contact : 022-25301330/31/32 Mob. : 08108125494

Email : sales@nkinstruments.com Website : www.nkinstruments.com




LINE SIZE SELECTION

Size	15 NB	25 NB	40 NB	50 NB	65 NB	80 NB	100 NB
Min Flow m ³ /hr	0.23	0.88	2.04	3.50	6.30	8.00	14.0
Max Flow m ³ /hr	2.60	8.80	20.4	35.0	63.0	80.0	140

Fitting Condition

All type of straight pipe condition provided

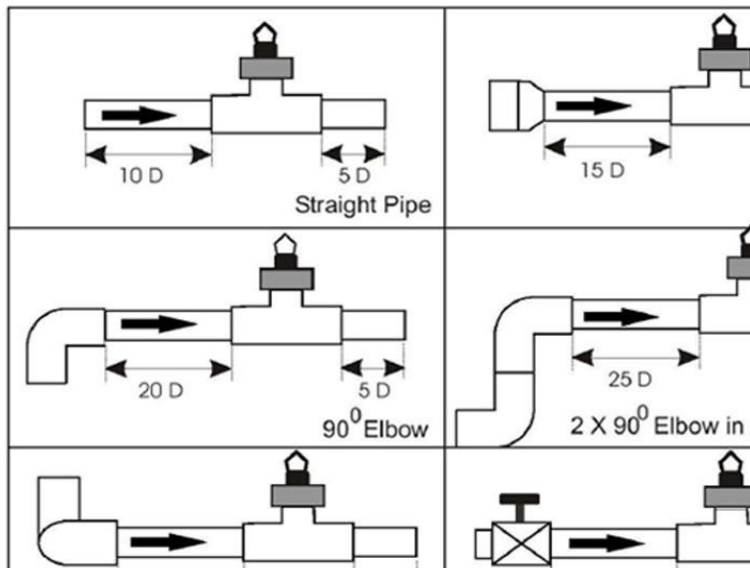

Installation

flow meter requires run, as per site following straight lengths must be for best result.



NK Instruments Pvt. Ltd.

Continuous efforts for product development may necessitate changes in these details without notice

Authorised Dealer



NK Instruments Pvt. Ltd.

B-501/504, 5th floor, Raunak Arcade, Near THC Hospital, Gokhale Road, Naupada,
Thane(W) 400602. Maharashtra INDIA Telefax Nos.: 91-22-25301330 / 31 / 32
E-Mail: sales@nkinstruments.com Web: <http://www.nkinstruments.com>
Skype: nitinkelkarskype Gtalk: nkinstruments2006



Address : 501-504, Raunak Arcade, Near Hotel Usha Kiran, Gokhale Road, Naupada, Thane (W) - 400602

Contact : 022-25301330/31/32 Mob. : 08108125494

Email : sales@nkinstruments.com Website : www.nkinstruments.com