


FC HIGH RANGE BELLOWS SWITCH

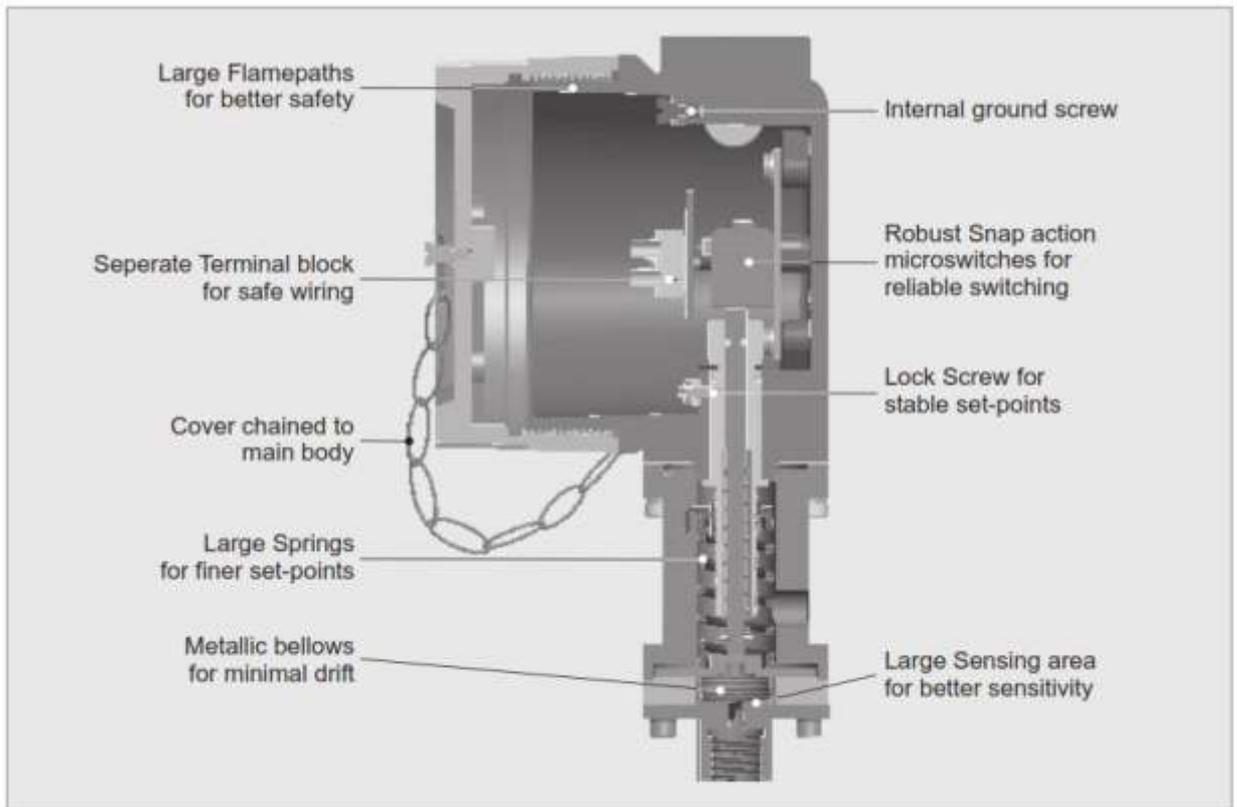


Approximate Weight

Pressure switches with Aluminum enclosure 1.92 Kg.

Pressure switches with Grey CI enclosure 4.32 Kg.

Pressure switches with SS enclosure : 4.45 Kg.


Electrical Connection :

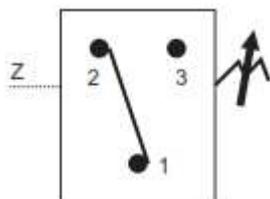

Some Applications Forcryogenic application




PRESSURE CAPSULE DETAILS

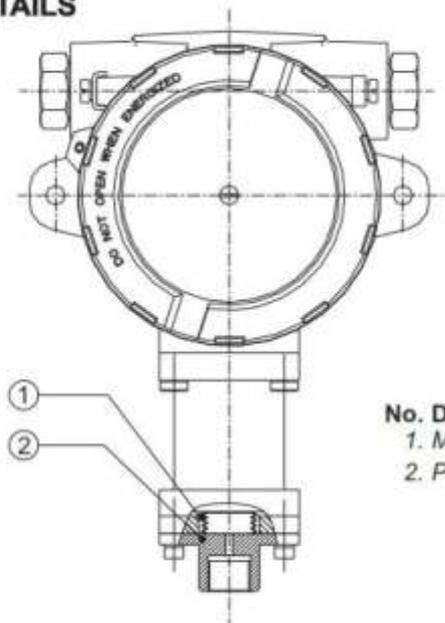

- No. Description**
 1. *Metallic Bellow*
 2. *Pressure Housing*

Note : *wetted parts* are mentioned in italics.

INSTALLATION DRAWING

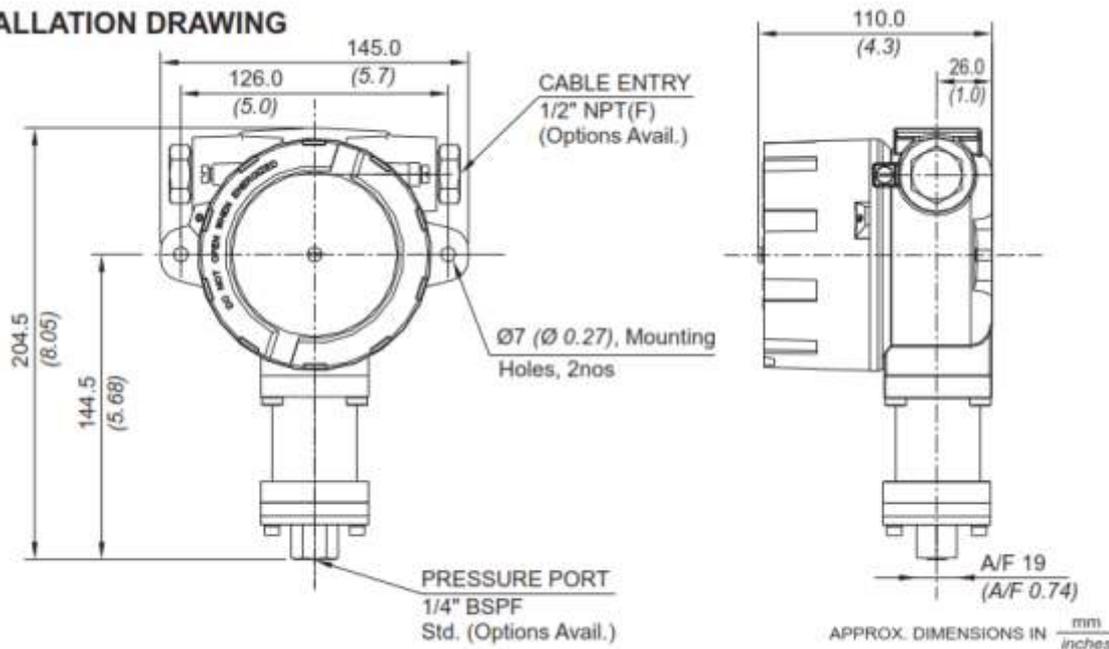

RANGE SELECTION TABLE

Range Code	Range bar (psi) ()	Differential* bar (psi)	Maximum Working Pressure bar (psi)
		Approximate Maximum for "A1" microswitch	
H01	0.1 - 1.0 (1.45 - 14.50)	0.10 (1.45)	12 (174.05)
H02	0.1 - 1.5 (1.45 - 21.76)	0.12 (1.74)	12 (174.05)
H03	0.2 - 2.6 (2.90 - 37.71)	0.17 (2.46)	12 (174.05)
H04	0.2 - 3.6 (2.90 - 52.21)	0.10 (1.45)	12 (174.05)
H07	0.5 - 7.0 (7.25 - 101.50)	0.20 (2.9)	12 (174.05)
H10	0.5 - 10.0 (7.25 - 145.037)	0.20 (2.9)	25 (362.6)
H15	1.0 - 15.0 (14.5 - 217.55)	0.50 (7.25)	25 (362.6)
H30	5.0 - 25.0 (72.52 - 362.6)	0.50 (7.25)	35 (507.63)
H4T	5 - 40 (72.52 - 580.15)	5 (72.52)	100 (1450.37)
H1H	10 - 100 (145.037 - 1450.37)	12 (174.05)	200 (2900.75)

*Minimum differential increases with set point (Graphs available on request)

* Differentials of microswitches A2 through A9 will vary . Differentials for A7 are typically twice that for A1 micro switch. Please indicate specifically the differential value in enquiry/order, when it is critical in your application

Authorised Dealer



NK Instruments Pvt. Ltd.

B-501/504, 5th floor, Raunak Arcade, Near THC Hospital, Gokhale Road, Naupada,
Thane(W) 400602. Maharashtra INDIA
E-Mail: sales@nkinstruments.com
Skype: nitinkelkarskype

Telefax Nos.: 91-22-25301330 / 31 / 32
Web: <http://www.nkinstruments.com>
Gtalk: nkinstruments2006



HOW TO ORDER FLAMEPROOF HIGH RANGE BELLOWS PRESSURE SWITCHES

Group 1	Group 2	Group 3	Group 4	Group 5	Group 6	Group 7	Group 8
Non standard allocation	Gas Group	Cable Entry Size	Switch Type	Range Code (values in bar)	Microswitch Type	Pressure Port Material Size	Bellows Material
<input type="checkbox"/> Reserved for non standard options not covered in catalogue. Will be given by manufacture only after agreement of supply details with customer	Classification FC = Flameproof pressure switch, ATEX & IECEx approved, with Aluminium head as per IS/IEC 600791 for Gas Gr. IIC	1 = Al. head ½" NPT threads 2 = Al. head ¾" NPT threads 3 = Al. head M20 x 1.5 threads 4 = Grey CI head ½" NPT threads 5 = Grey CI head ¾" NPT threads 6 = Grey CI head M20 x 1.5 threads 7 = SS head ½" NPT threads 8 = SS head ¾" NPT threads 9 = SS head M20 x 1.5 threads	P1 = pressure switch, fixed differential without scale P2 = pressure switch, fixed differential with scale in bar P3 = pressure switch, fixed differential with scale in psi	H01 = (0.1 - 1.0) H02 = (0.1 - 1.5) H03 = (0.2 - 2.6) H04 = (0.2 - 3.6) H07 = (0.5 - 7.0) H10 = (0.5 - 10.0) H15 = (1.0 - 15.0) H30 = (5.0 - 25.0) H4T = (5 - 40) H1H = (10 - 100)	A1 = General purpose microswitch rated at 15A; 250VAC *A2 = Hermetically sealed for corrosive environments *A3 = gold plated contacts for low voltage applications *A4 = DPDT configuration *A5 = for high DC ratings *A6 = elements with adjustable deadband *A7 = 2SPDT switching elements *A9 = General purpose microswitch rated at 5A; 250VAC Please refer page no. 230 for more microswitch options * Please refer note under Range Selection Table	B1 = SS316L/ ¼" BSP(F) B2 = SS316L/ ¼" NPT(F)	2 = SS 316L

eg A flameproof switch for gas group IIC, with ½" NPT cable entry in aluminum housing as 1SPDT pressure switch, having 0.1 bar to 1 bar pressure range, with 15 Amp. Micro switch, Bellows pressure housing with ¼" BSP port size & SS316L Bellows shall be specified by

Group 1	Group 2	Group 3	Group 4	Group 5	Group 6	Group 7	Group 8
<input type="checkbox"/>	FC	1	P1	H01	A1	B1	2

Please specify full model number to avoid ambiguity. If only the first two groups are specified while ordering, un-calibrated switches with standard wetted parts and enclosures will be supplied.

Continuous efforts for product development may necessitate changes in these details without notice

Authorised Dealer

	<h3 style="margin: 0;">NK Instruments Pvt. Ltd.</h3> <p style="font-size: small; margin: 0;">B-501/504, 5th floor, Raunak Arcade, Near THC Hospital, Gokhale Road, Naupada, Thane(W) 400602. Maharashtra INDIA E-Mail: sales@nkinstruments.com Skype: nitinkelkarskype</p>	
---	--	---

Telefax Nos.: 91-22-25301330 / 31 / 32
 Web: <http://www.nkinstruments.com>
 Gtalk: nkinstruments2006