

## VIBRATING ROD POINT LEVEL SWITCH JAYCEEVIBRO – 2020



### SILENT SPECIFICATIONS:

- **Fast and Easy Installation**  
No Calibration.
- **No effect of electrical properties of the Service material.**  
High Reliability.
- **Suitable for the highly dusty environment.**
- **Suitable for grain size up to 20 mm**
- **Field selectable operation logic.**  
Can be configured either for High/Low Level point switching.
- **Provides economical solutions.**  
Various model not required.  
Reduces the Inventory cost.

### MEASURING SYSTEM:

The complete system, JAYCEEVIBRO-2020... series, consists: The sensing probe of Vibrating Fork and the electronic switching unit.

### FUNCTION:

The electronically stimulated Concentric Rods vibrates at its mechanically resonance frequency of about 300 Hz when the Rod is free of the service material. The resonance is caused by the piezoelectric vibrator. One of the piezo crystals produces a small voltage which is transmitted to the switching amplifier. If the Rod is covered by the bulk material, a damping effect is produced, and the piezo crystal does not produce the voltage and the amplifier will switch, and a corresponding signal output is actuated. The vibration of the Rod has self-cleaning properties. The light deposit on the container wall does not affect the operation of the JAYCEEVIBRO.

**TECHNICAL SPECIFICATIONS (STANDARD):****SWITCHING UNIT:**

**Housing:** Aluminium, weather proof, powder coated.

Integral with the probe/suitable for back panel mounting.

**Cable entry:** 2 nos.

**Ambient temperature:** 0 ° C to +60° C

**Power consumption:** 2 VA

**Mains Voltage:** 230/110 V AC (+/-15%), 50 Hz, or 18 to 55 V DC (optional) Universal, 65 to 265 V AC

**Output:** 2 sets of potential free c/o contacts rated at 5 amps, 230 V AC for noninductive loads. OR PNP/ NPN DC output

**Switching delay:** Continuously adjustable from 2 to 20 sec. probe Free or probe covered. (optional)

**Safety operation:** Field selected switch over for min. or max. (FSL/FSH) switching

**Switch status:** Green LED shows display Normal, Red LED shows alarm.

**ROD (SENSING PROBE):**

**Mounting:** Screwed – 1 ½” BSP (standard) Or Flanged (optional)

**Sense:** Rod, Stainless steel

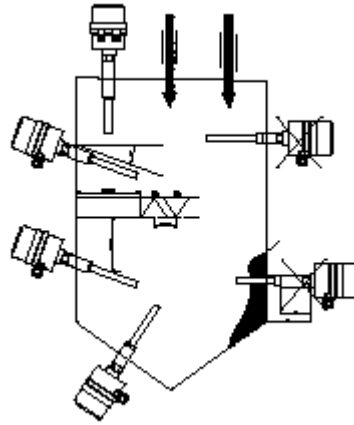
**Extension:** (Optional)

**Length:** 230 (standard) upto 3000 mm and as per application.

**Operating Temp in:** 150 deg for the integral switching vessel unit. (standard)

**PRIMARY AREA OF APPLICATION**

- Building industry materials, cement, sand, lime, etc
- Foodstuff industry, milk powder, flour, salt, food grains, etc
- Plastic industry, powder, granular etc. Timber industry, chemical and mining etc

**INSTALLATION**

Continuous efforts for product development may necessitate changes in specifications without Notice

JAYCEE TECHNOLOGIES PRIVATE LIMITED

REPRESENTED BY:

Mobile: 8554982251/ 9371068669 ; e-mail : [jayceetech@gmail.com](mailto:jayceetech@gmail.com), [sales@jayceetech.in](mailto:sales@jayceetech.in)