


PRODUCT SELECTION GUIDE

selec[®]
Creating Best Value

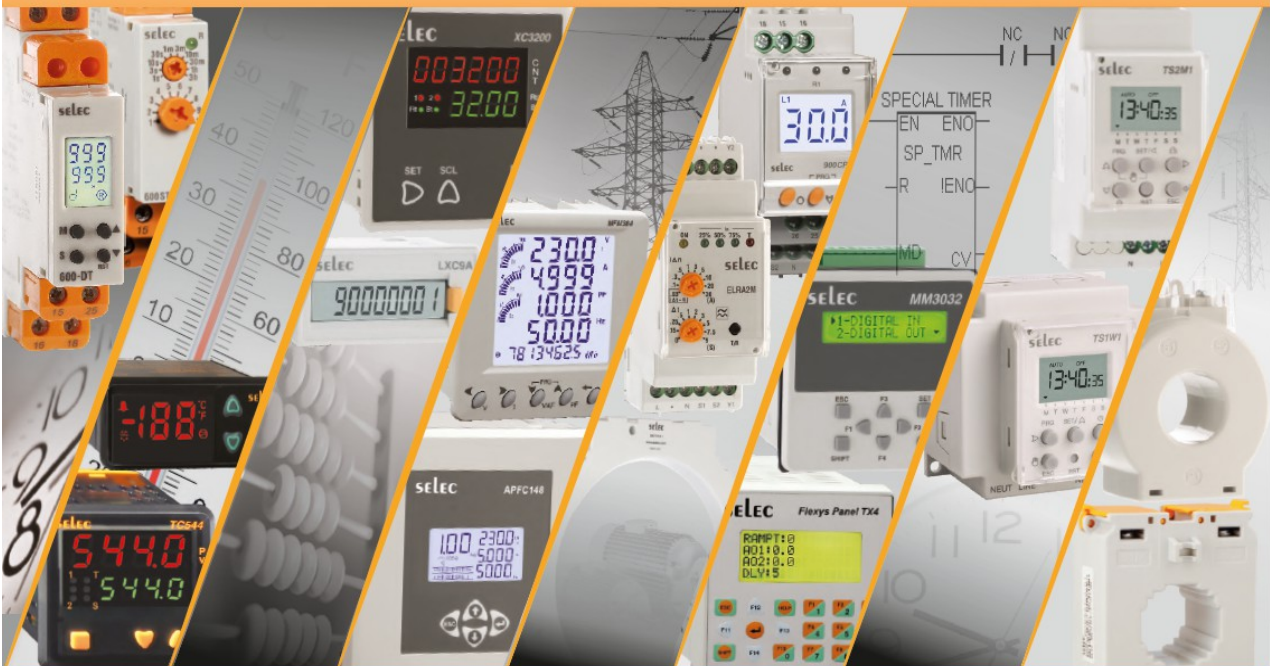

- Meters • CTs • Protection Relays • Power Factor Controllers
- Time Switches • Timers • Counters • Temperature Controllers
- Process Indicators • PLCs • HMI • Aluminium Enclosures

Current Transformers



SPCT



RCT



TWCT

FEATURES	<ul style="list-style-type: none"> Use with different bus bar size Panel mount / DIN rail mount (Require optional accessory) Accuracy: Class 0.5 to 5 	<ul style="list-style-type: none"> Sealable terminal / Wire type output Panel mount Accuracy: Class 1 to 5 	<ul style="list-style-type: none"> Terminal output Accuracy: Class 0.5 to 5
RATED PRIMARY RATING	30 to 4000A	30 to 600A	30 to 1600A
RATED SECONDARY OUTPUT	5A		
RATED BURDEN (VA)	1,1.25, 1.5, 2.5, 3, 3.75, 5, 7.5, 10, 15	1.5, 5	1.5, 5, 10
ACCURACY	0.5,1, 3, 5	1, 5	0.5, 1, 5
OPERATING FREQUENCY	AC 50 / 60Hz		
SYSTEM VOLTAGE	720V max		
APPLICABLE STANDARD	IEC 61869-2	---	