


ALLOY STEEL CHAIN

- Ferreteria manufactures a wide range of Alloy/M.S. link chains using state of the art chain making machines.
- Their chains have high accuracy and tight tolerance to ensure smooth running.
- A sophisticated continuous heat treatment process gives even hardness and strength to each link
- Our E-coated chains provide high corrosion resistance for longer life.
- In-house manufacturing allows flexibility for customized production.
- All links marked as per standards for easy identification.

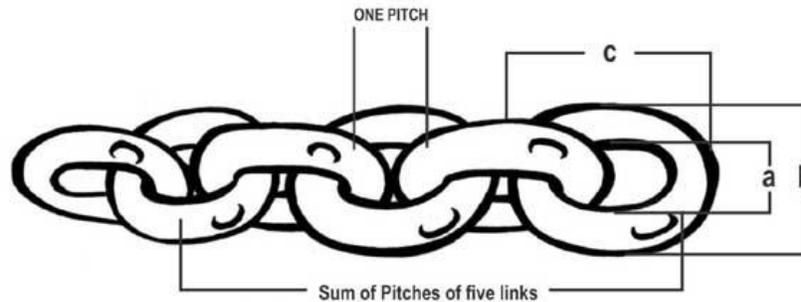

LINK CHAIN RANGE TECHNICAL SPECIFICATION SHEET

Type	Dia of chain(mm)	Pitch (mm)	Sum of pitches of 5 links(mm)	Discard limit(mm)	a (mm)	b(mm)	c(mm)	SWL(t)	PL(t)	BL(t)
alloy steel load chain G-80	6	18	90	91	6	20	30	1	2.7	4.5
alloy steel load chain G-80	6.3	19	95	96.3	8.4	21	31.6	1.2	3.2	5
alloy steel load chain G-80	7.1	21	105	109.1	8.8	23	35.2	1.5	4	6.5
alloy steel load chain G-80	8	23	115	117	10.5	26.5	39	2	5	8.05
alloy steel load chain G-80	8	24	120	122.5	11	27	40	2	5	8.05
alloy steel load chain G-80	9	27	135	140	12.5	30.5	45	2.5	6.3	10.2
alloy steel load chain G-80	10	30	150	155	13.2	33.2	50	3.2	7.8	12.2
alloy steel load chain G-80	12	33	165	170	15.5	39.5	57	4.5	11	18
alloy steel load chain G-80	12	36	180	185	18	42	60	4.5	11	18
alloy steel load chain G-80	14	42	210	215	18	46	70	6.2	15	24.6
alloy steel load chain G-80	16	48	240	245	19.5	51.5	80	8.05	19.3	32.2
mild steel load chain G-40	9.5	24.5	122.5	203	11.5	30.5	43.5	1.4	2.85	5.7
mild steel load chain G-40	11	30	150	153	13.5	35.5	52	1.9	3.8	7.6
mild steel load chain G-40	12.5	35.25	176.25	180	15	40	60.25	2.45	4.9	9.8
mild steel hand chain G-30	5	25	125	127	7.5	17.5	35	290	590	1180
mild steel hand chain G-30	5	22.5	112.5	115	7.5	17.5	32.5	290	590	1180
mild steel hand chain G-30	6	19	95	97	8.5	20.5	31	425	850	1700
mild steel hand chain G-30	6	26.5	132.5	135	8	20	38.5	425	850	1700
			0		0		0			

SPECIFICATIONS/DIMENSIONS (mm)

