


Model: FRUA



Steady Model

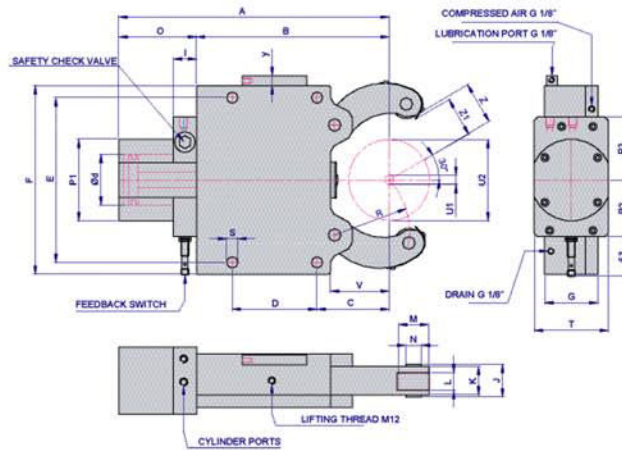

Standard Features:

- Safety Valve
- Provision for max. opening feedback
- 1 set swarf guard 3-piece
- Provision for compressed air connection
- Provision for centralized lubrication

	FRUA2	FRUA3	FRUA3.1	FRUA4	FRUA5	FRUA6
A	298.5	462	470	609	706	980
B	195	308	316	437	500	709
C	70	115	123	146	178	215
D	85	135	135	240	270	330
E	170	262	262	365	400	610/640
F	205	290	290	400	450	705
G	70	85	85	110	145	145
I	33	37	37	37	37	37
J	42	52	52	67	78.5	83
K	35	45	45	60	75	75
L	19	25	25	25	29	29
M	35	47	47	52	62	80
N	21	20	25	32	40	42
O	100	154	154	189	206	271
P1	105	137	137	165	168	200
P2	66	92	90	102	102	120
P3	75	92	94	110	110	135
R	75	117.3	124	172	209	290
S	14	18	18	23	23	27
T	68	102	102	126	144	158
V	60	91.5	99.5	128	160	175
Y	19	19	19	19	20	19
U1	8	12	20	30	48	160
U2	80	130	150	220	268	460
U1	16	20	20	30	48	160
U2	80	130	150	220	268	460
Z	41	55	76	111	135	230
Z1	34	54	74	106	130	225
d	50	80	80	100	100	130
h	1/4"	1/4"	1/4"	3/8"	3/8"	3/8"
bar	8/60	8/60	8/60	8/60	8/60	8-70
daN	350	1000	1000	1500	2000	3000
daN	100	250	250	500	500	670
mm	0.02	0.04	0.04	0.05	0.06	0.06
mm	0.005	0.007	0.007	0.007	0.01	0.01
m/min	950	725	725	725	700	525
kg	18.5	42	48	104	160	430