




SOURCING STORING SUPPLY

Part Code:
MV-PBDF / MV-PBDFS



Flange Type Blind Spacers

Zinc Plated Steel: MV-PBDF | Stainless Steel: MV-PBDFS

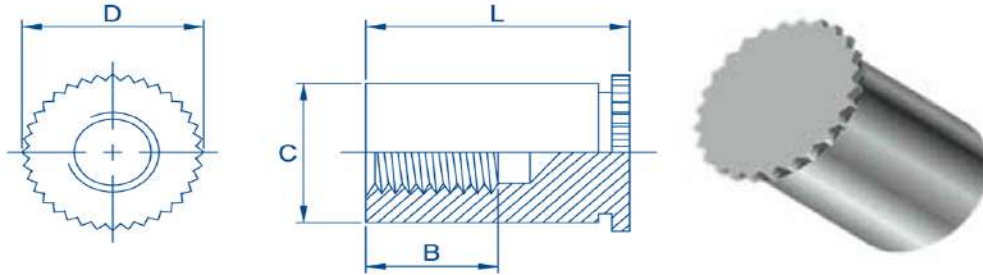

Metric Dimensions

Thread & Pitch	M2 0.4	M2.5 0.45	M3 0.5	M4 0.7	M5 0.8
L ±0.1	5 - 12	5 - 12	5 - 30	6 - 30	6 - 30
B = L x 0.5					
C +0.00 - 0.08	4.18	4.18	6.18	7.18	7.18
D ±0.2	5.2	5.2	7.2	8.2	8.2
Min sheet thickness	1.0	1.0	1.0	1.0	1.0
Hole +0.08	4.2	4.2	6.2	7.2	7.2
Min distance to edge of sheet	6.0	6.0	7.0	8.0	8.0

Metric Performance Data: MV-PBDF - MV-PBDFS

Thread & Pitch		M2 0.4	M2.5 0.45	M3 0.5	M4 0.7	M5 0.8
Test sheet thickness	Steel	1.0	1.0	1.0	1.0	1.0
	Aluminium	1.0	1.0	1.0	1.0	1.0
Installation (kN)	Steel	9.8	9.8	14.7	15.7	15.7
	Aluminium	4.9	4.9	6.9	7.8	7.8
Pushout (N)	Steel	1000	1000	2000	2200	2200
	Aluminium	785	785	1177	1275	1275
Torsional Resistance (Nm)	Steel	2.0	2.0	2.9	4.9	4.9
	Aluminium	1.5	1.5	2.5	3.9	3.9

These tests have been conducted in laboratory conditions, these figures should therefore be used for guidance only.

Mob : 9483389951 | Off : 9901633822 | support@mvdfasteners.com | mvdfasteners@gmail.com

693/186/16 | Kanika Nagar | Kachanayakana Halli | Bommasandra Ind. Area | Bangalore - 99