




- Versatile model having many options
- High axial & radial load capacity
- Constructed to withstand the demand of rough and tough industrial environment.

### Technical Specification


<b>Channels</b>	ABZ
<b>Output</b>	Driver(50mA source/sink) with inverted channels
<b>PPR</b>	see ppr option below
<b>Voltage</b>	5-28 vdc
<b>Shaft Size</b>	10 mm
<b>Mounting Style</b>	Clamping Flange
<b>Temperature</b>	0-70 <sup>0</sup> C
<b>Connection Location</b>	Side Gland

### Dimension Details

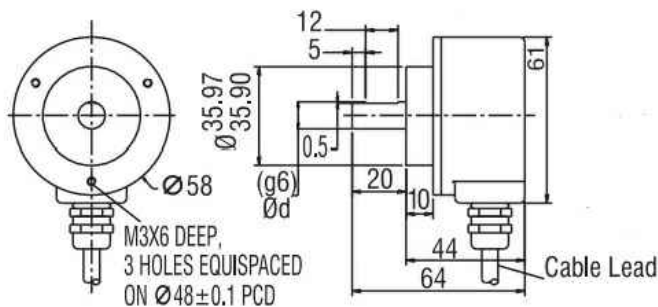

Ordering Example

**JT-ENC-2500-S10-V3-5M**

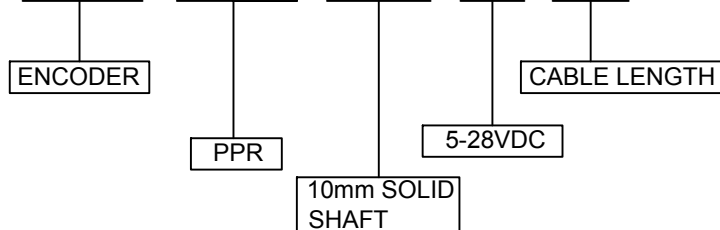

Model JT-ENC-2500-S10-V3-5M PPR option:-  
360,1024,2500,3600,5000,10000, as per customer requirement.