


CABLE GLAND

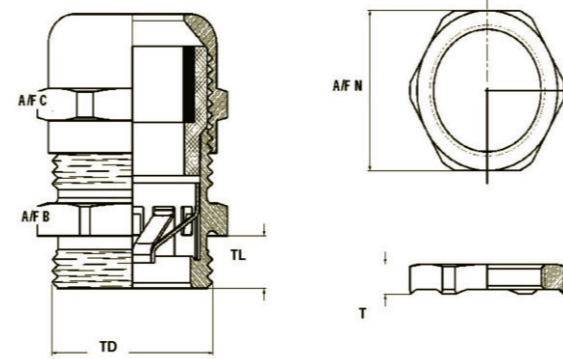

SIZE	TD (mm)	TL (mm)	T (mm)	A/F N (mm)	Min. Shield Diameter (mm)	A/F B (mm)	A/F C (mm)	Clamping Range (mm)
PG7	12.3	8.3	5.2	18.0	2.5	16.0	15.7	3.0-6.5
PG9	15.1	8.3	5.5	22.0	3.0	19.0	18.8	4.0-8.0
PG11	18.3	8.9	4.9	24.0	4.0	21.9	21.3	5.0-10.0
PG13.5	20.3	9.2	5.9	25.4	5.0	22.9	23.5	6.0-12.0
PG16	22.3	10.2	5.5	30.0	8.0	25.9	25.7	10.0-14.0
PG19	23.8	10.3	5.5	29.9	9.0	26.7	26.7	10.0-15.0
PG21	28.1	9.7	5.6	36.0	11.0	32.7	33.0	13.0-18.0
PG25	29.6	11.4	6.1	36.7	14.0	34.9	34.6	15.0-22.0
PG29	36.5	12.2	6.8	45.2	16.0	41.9	41.4	18.0-25.0
PG38	46.7	16.3	7.5	58.0	24.0	52.4	51.8	25.0-32.0
PG42	53.6	14.8	7.5	63.0	27.0	59.8	61.1	30.0-38.0
PG48	69.0	18.0	14.2	75.6	30.0	72.6	72.2	34.0-44.0
PG63	75.2	33.3	13.0	85.0	43.0	80.0	81.9	44.0-50.0
3/8"NPT	16.6	14.9	5.0	23.7	2.5	18.5	18.5	3.0-8.0
1/2"NPT	20.5	12.8	6.2	26.8	4.0	23.5	23.8	5.0-12.0
3/4"NPT	26.0	15.4	6.2	32.8	8.0	32.8	32.8	10.0-18.0
1"NPT	32.4	15.4	7.0	39.8	17.0	41.0	41.5	18.0-25.0
M12*1.5	11.7	9.2	4.9	18.0	2.5	15.8	15.8	4.0-8.0
M16*1.5	15.6	9.2	4.9	22.0	3.0	18.6	18.5	5.0-10.0
M18*1.5	17.8	8.5	5.0	23.8	5.0	21.2	21.6	5.0-11.0
M20*1.5	19.6	10.4	5.5	26.7	5.0	23.7	23.4	6.0-12.0
M25*1.5	24.9	10.4	5.0	33.3	8.0	32.7	32.4	10.0-14.0
M32*1.5	31.7	11.4	5.9	38.6	11.0	34.8	34.6	13.0-18.0
M40*1.5	39.8	15.3	7.8	50.5	16.0	47.3	49.5	18.0-25.0
M50*1.5	49.5	15.6	7.6	60.0	19.0	57.5	59.9	22.0-32.0
M63*1.5	62.5	14.6	8.0	72.6	30.0	64.5	65.3	34.0-44.0