


## Technical Data KF

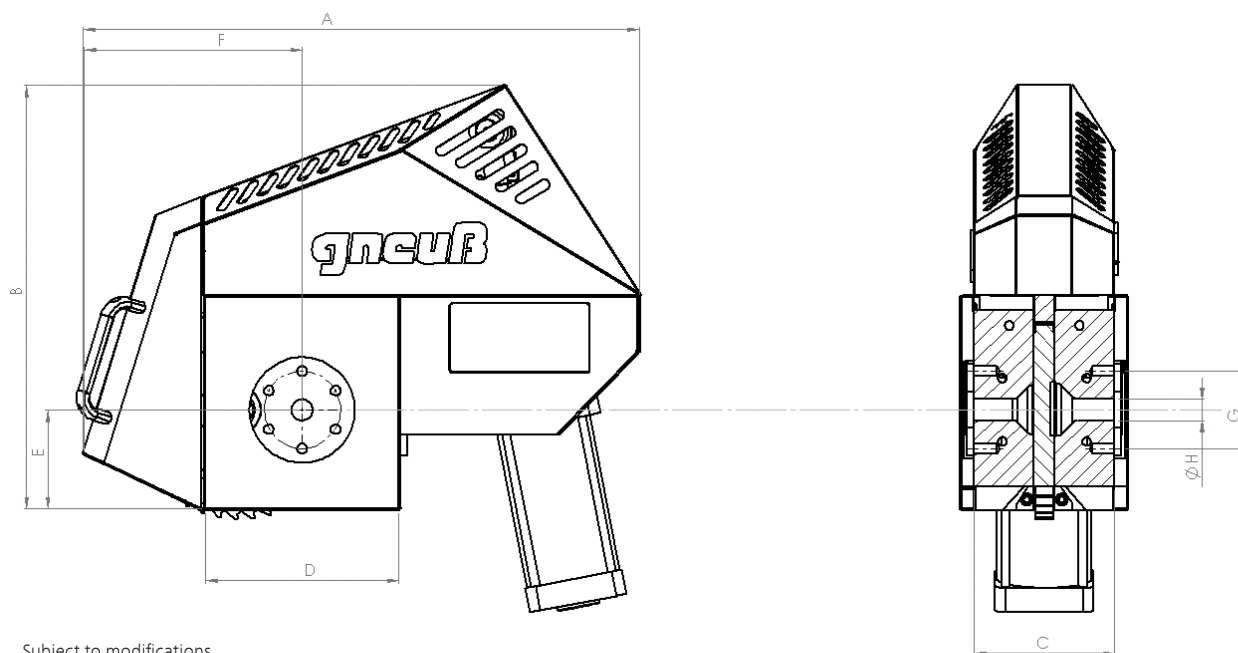

Subject to modifications.

filter type	screen area	heating capacity in watt	heater zones <sup>(1)</sup>	pressure in bar max. <sup>(2)</sup>	temp. in °C max. <sup>(3)</sup>	Q in kg/h <sup>(4)</sup>	dimensions in mm								weight in kg
							A	B	C	D	E	F	G	H <sup>(5)</sup>	
	active in cm <sup>2</sup>	electric	electric												
<b>KF 45</b>	16	3900	2	500	320	100	645	460	130	185	95	240	90	20	80
<b>KF 60</b>	28	4400	2	500	320	200	845	525	145	240	120	265	110	20	100
<b>KF 75</b>	44	5100	2	500	320	300	910	605	200	280	142	310	110	25	200
<b>KF 90</b>	64	10700	2	500	320	500	1000	690	232	310	165	360	120	30	300
<b>KF 110</b>	95	12700	2	500	320	700	1100	770	255	380	200	410	140	30	350
<b>KF 130</b>	135	13700	2	500	320	900	1170	830	298	420	228	460	160	35	500
<b>KF 150</b>	180	15700	3	500	320	1400	1240	960	330	455	285	530	160	35	700
<b>KF 175</b>	240	17700	3	500	320	2000	1420	1200	385	480	295	580	300	40	1050

(1) = 1 heater zone for liquid heating.

(2) = High pressure versions available as an option.

(3) = Up to 400 °C possible as an option.

(4) = Based on: MFI 2-5, filtration fineness 200 µm and differential pressure 50 bar.

(5) = The dimension „H“ can be freely chosen, the values given are maximum values.