



AIR OPERATED DOUBLE DIAPHRAGM PUMP



SPECIFICATIONS

These Parameters depend on size of Pump

- Flow : Max 30 m³/hr
- Pressure : 7 kg/cm²
- Solid Size : Max 10 mm
- Solid% : Max 50%
- Temperature : Max 90°C
- Viscosity : 15000CP

FEATURES

- No Seal, No Leakage
- No Motor, No fire, Explosion Proof
- No Rotation, No Charging, Less Wear and Tear
- Self-Priming, No Foot Valve Needed
- Pump can run dry without damage
- Variable Flow with same Pump
- Stop Automatic on Closing of Discharge Valve
- Can be Submerged
- Light weight, handy in use
- Can Handle Solid Size Upto 10mm







PERFORMANCE TABLE OF AODD PUMP

MODEL	AIR INLET CONNECTION	INLET IN INCH	OUTLET IN INCH	MAX FLOW IN LPM	MAX SOLID SIZE IN MM	MATERIAL OF CONSTRUCTION
AER 15	1/4" BSP	1/2	1/2	26	2.5	PP/PVDF/SS/ALU
AER 25	3/8" BSP	1	1	130	3.4	PP/PVDF/SS/ALU
AER 40	3/8" BSP	1.5	1.5	280	5.0	PP/PVDF/SS/ALU
AER 50	1/2" BSP	2	2	500	10	PP/PVDF/SS/ALU



Manufacturing and Supplying Wide Range of Industrial Pumps and Industrial Products

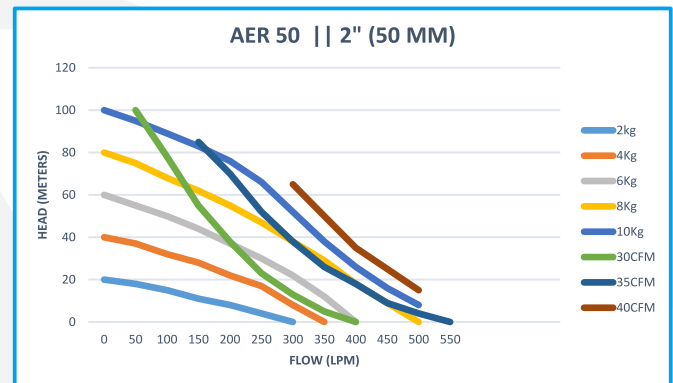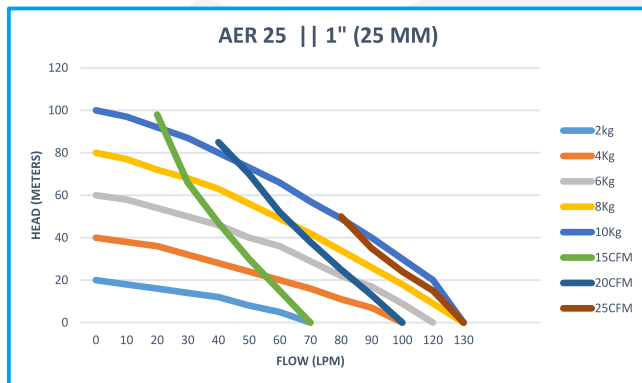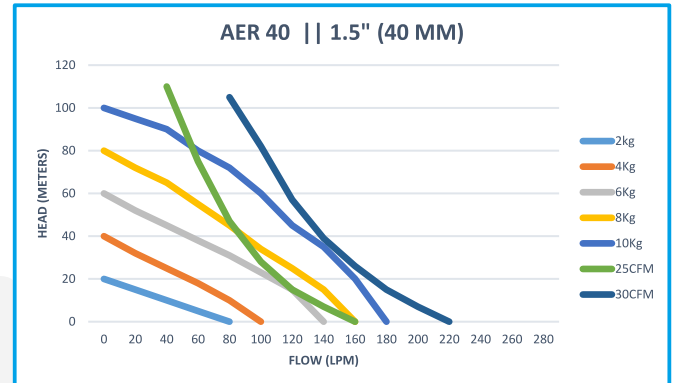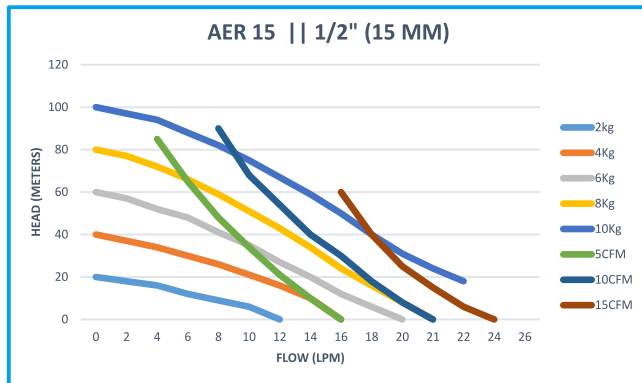

APPLICATION INDUSTRIES

- Automotive Industry
- Beverage Industry
- Ceramics
- Chemical Industry
- Construction Industry
- Cosmetics
- Paints & Coating
- Pharmaceutical Industry
- Food
- Furniture Industry
- Mining
- Municipalities
- Plating
- Refineries
- Road Tanker Truck
- Shipbuilding
- Water and Sewage Treatment
- Utility
- Petrol/Gas Stations

SPARE PARTS



Contact Us



A2-105, Shubh Innovate Ind Co-op.Soc.Ltd, Gokhiware,
Opp Chinchpada Bus Stop, Waliv Road, Vasai (East),
Dist. Palghar - 401 208, Maharashtra, India.



+91-8097603866 /+91-9616032524



aeronpumps@gmail.com



www.aeronengineering.com

