





WHY SPANCO?

The ASA is a Spanish style synthetic resin roof made from ternary polymer co-extruded by three kinds of materials: acrylonitrile, styrene and acrylate. The main material ASA is acquired from SABIC, one of the Global 500 companies. These Spanish roof tiles can withstand strong winds and earthquakes as they have an outstanding corrosion resistance and anti-UV performance. Ensuring easy installation, our ASA synthetic resin tile is available with varied external designs according to the clients demands. According to clients demands, our ASA synthetic resin tile is available with varied external design.



- 1. The ASA is a rust-proof and heat-resistant light-weight roof tile that gives cooling effect in the hot summers.
- 2. Good quality modified PVC materials with high toughness and sound resistance is adopted to ensure the strength without compromising on the rigidity.

Factors:


- Sound proof
- Light weight
- Easy to Install
- Rust proof
- Heat Proof (having thermal insulation feature)

Applications of Spanish Style ASA Roof Tile:

Our weathereproof ASA-uPVC roof sheets are suitable for protecting your thorough vicinity including schools, institutes high-grade factories, industrial spaces, warehouses, commercial and residential spaces. The only roofing solution with dynamic uses from protecting to enhancing your vicinity.

- High Grade Factories.
- Warehouses.
- Schools and Universities.
- Clubs houses & Community centers.
- Five star hotels & resort on beaches.






	İ				
Thickness	2.3 mm	2.5 mm			
Purlin Distance	2 feet	2.5 feet			
Width	1.04 mtr. Standard				
Covering Width	0.96 mtr. for Actual Used				
Length	2.44 mtr 3.05 mtr 3.66 mtr 4.57 mtr 8ft. 10ft. 12ft. 15ft. Customized Length fo Project in Multiple of 220mm				
Weight	4.5 kg per Sq.mtr. for 2.3 mm (Aprx.) 4.9 kg per Sq.mtr. for 2.5 mm (Aprx.)				
Colors	Grey / Orange / Terracotta Red				
Fixing	5 self Drilling Screw per Sq.mtr. must				

Note:

Special Thickness i.e. 3.5 mm is also Available for Who have Purlin Distance above 1.0 to 1.2 mtr.

White/Blue/Green



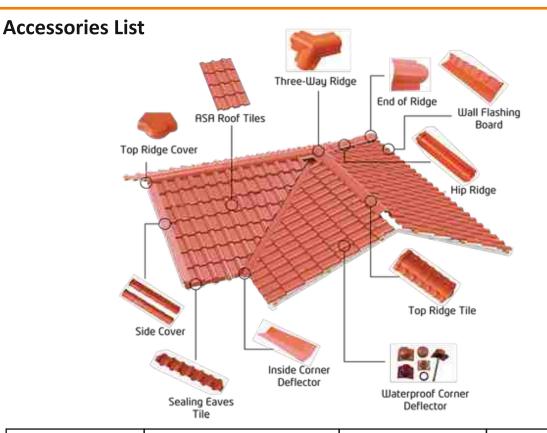

Main Ridge Tile		1050mm 960mm	Main Roof
Endcap of Main Ridge Tile		300*90*230mm	Endcap of Main Roof
Tiled Ridge Tile	TO DELLES	1050mm 960mm	Titled Roof
Endcap of Titled Ridge Tile		230mm	Endcap of Main Roof
Tee (3-Way)		180x160x160mm	Tee (3-Way)
Tee (4-Way)		150x150x150x150mm	Tee (4-Way)
#100 Drain Board		1050mm 960mm	#100 Drain Board
120° Vertical Wall Flashing Board		1050mm 960mm	#100 Drain Board
Waterproof Accessories	***	24x10 36x30 30x20 ST 6.3x65/75/110/125	6.3x90

HEAD OFFICE: E-64, Ananta swagatam, Nr. Pratham Rivera, B/S ,Shree Hari Duplex,

Bh.Narayanwadi Restorent,Altladara -Bil Road, Vadodara-391412.

Factory Address: Lajai - Hadmatiya Cross Road, Opp. Elite International School,

Hadmatiya, Morbi, Gujarat - 363 641

Mr. Rajul Patel: +91 95484 95484 II Mr. Ronak Shah: +91 88660 90091