




www.swastiklugs.in  
spsslugs@yahoo.in

## SWASTIK COPPER WEAK BACK TYPE SOLDERING FERRULES FOR ALUMINIUM CONDUCTORS (I.S. – 6554-1972)

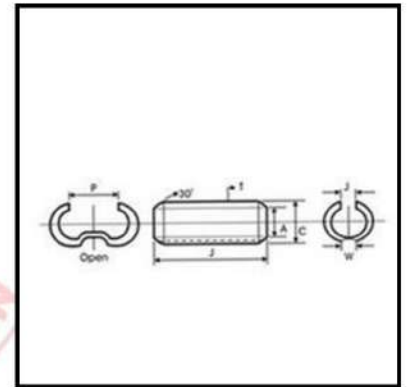


MM <sup>2</sup>	Cable Size	A	C	G	F	W	P	J	Swastik Cat No.
6	1/2.8	3.0	4.6	2	0.8		3	20	SWB 279
10	7/1.4	4.4	6.0	2	0.8		4	25	SWB 280
16	7/1.7	5.5	7.5	2	1.0	1.5	5	25	SWB 281
25	7/2.24	7.0	9.0	2	1.0	1.5	7	30	SWB 282
35	7/2.5	8.0	10.4	2	1.2	1.5	8	35	SWB 283
50	19/1.8	9.5	11.9	2	1.2	1.5	9	40	SWB 284
70	19/2.24	12.0	14.8	3	1.4	3	12	45	SWB 285
95	19/2.5	13.5	16.3	3	1.4	3	13	50	SWB 286
120	37/2.06	15.5	18.7	4	1.6	3	15	55	SWB 287
150	37/2.24	17.0	20.6	4	1.8	3	16	60	SWB 288
185	37/2.5	18.5	22.9	4	2.2	5	18	65	SWB 289
225	37/2.8	20.5	24.9	5	2.2	5	20	75	SWB 290
240	61/2.24	22.0	29.6	5	2.2	5	21	80	SWB 291
300	61/2.5	24.0	29.6	5	2.8	5	23	85	SWB 292
400	61/3.0	28.5	34.7	7	3.1	5	27	95	SWB 293
500	91/2.65	30.5	37.5	7	3.5	5	30	105	SWB 294
625	91/3.0	34.5	42.5	8	4.0	5	33	115	SWB 295

**MATERIAL : COPPER : 1897**  
**FINISH : ELECTRO TINNED**



www.swastiklugs.in  
spsslugs@yahoo.in

## SWASTIK COPPER WEAK BACK TYPE SOLDERING FERRULES FOR ALUMINIUM COPPER CONDUCTORS

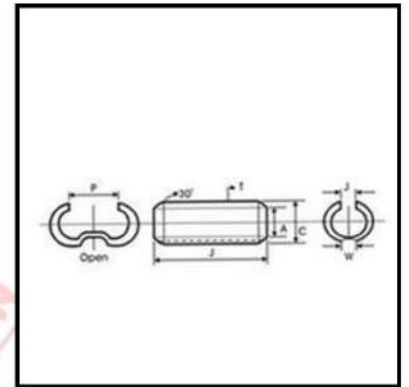

SIZE MM <sup>2</sup>	A	C	G	L	T	P	L-1	SWASTIK CAT NO.
6	3.0	4.6	2	20	0.8	3	–	SWB 251
10	4.4	6.0	2	25	0.8	4	–	SWB 252
16	5.5	7.5	2	30	1.0	5	1.5	SWB 253
25	7.0	9.4	2	35	1.2	7	1.5	SWB 254
35	8.0	11.2	2	40	1.6	9	1.5	SWB 255
50	9.5	12.7	2	45	1.6	9	3.0	SWB 256
70	12.0	16.4	3	50	2.2	12	3.0	SWB 257
95	13.5	17.9	3	55	2.2	13	3.0	SWB 258
120	15.5	20.1	4	60	2.3	15	3.0	SWB 259
150	17.0	22.6	4	65	2.8	16	5.0	SWB 260
185	18.5	24.5	4	70	3.0	18	5.0	SWB 261
225	20.5	26.5	5	75	3.2	20	5.0	SWB 262
240	22.0	28.4	5	80	3.2	21	5.0	SWB 263
300	24.0	32.0	5	85	4.0	23	5.0	SWB 264
400	28.5	37.5	7	95	4.5	27	5.0	SWB 265
500	30.5	40.5	7	105	5.0	30	5.0	SWB 266
625	34.5	45.5	8	115	5.5	33	5.0	SWB 267

MATERIAL : COPPER : 1897  
FINISH : ELECTRO TINNED

**Tolerance = ± 5%**