




www.swastiklugs.in
spsslugs@yahoo.in

Swastik Copper Insulated Ring tongue Terminal ends for solderless Crimping to Copper / Aluminium Conductors.

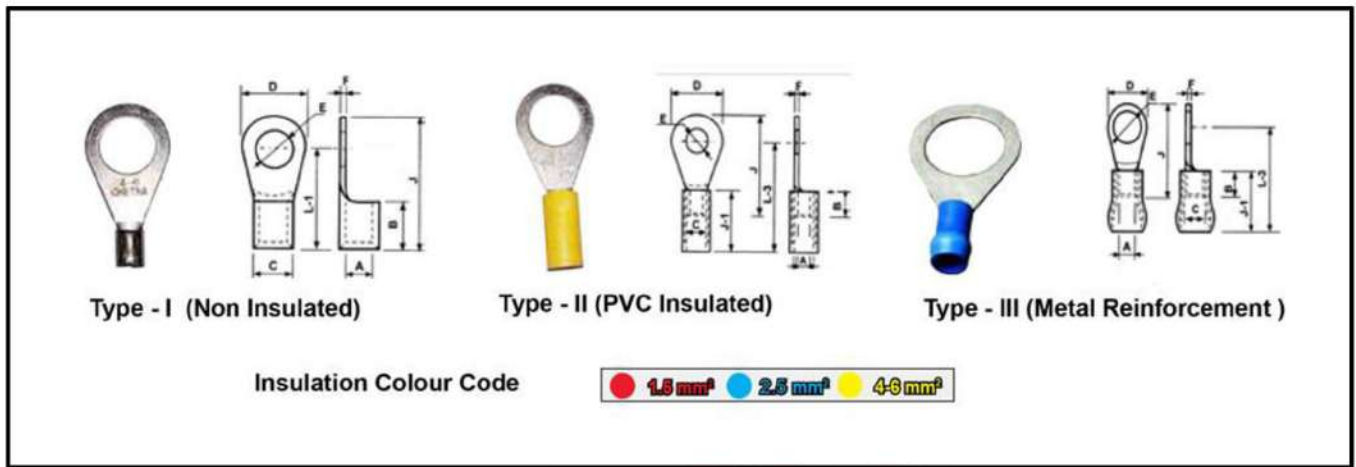

Area mm ²	E	A	C	D	F	B	K	H	J	J-1	L-3	C-1	Swastik Cat No.
1.5	2.2	1.6	3.2	6	0.8	5	2	4	14	10	16	4.8	RTI 7052
1.5	2.6	1.6	3.2	6	0.8	5	2	4	14	10	16	4.8	RTI 7053
1.5	3.2	1.6	3.2	6	0.8	5	2	4	14	10	16	4.8	RTI 7054
1.5	3.7	1.6	3.2	6	0.8	5	2	4	14	10	16	4.8	RTI 7055
1.5	4.2	1.6	3.2	6	0.8	5	2	4	14	10	16	4.8	RTI 7056
1.5	3.2	1.6	3.2	8	0.8	5	2	5	16	10	17	4.8	RTI 7057
1.5	4.2	1.6	3.2	8	0.8	5	2	5	16	10	17	4.8	RTI 7058
1.5	5.2	1.6	3.2	8	0.8	5	2	5	16	10	17	4.8	RTI 7059
1.5	3.2	1.6	3.2	6.8	0.8	5	1	3.6	13	10	14.6	4.8	RTI 7060
1.5	3.7	1.6	3.2	6.8	0.8	5	1	3.6	13	10	14.6	4.8	RTI 7061
1.5	4.2	1.6	3.2	6.8	0.8	5	1	3.6	13	10	14.6	4.8	RTI 7062
1.5	4.2	1.6	3.2	7	0.8	5	1	5	14.6	10	16	4.8	RTI 7063
1.5	4.2	1.6	3.2	10	0.8	5	2	6	18	10	18	4.8	RTI 7064
1.5	5.2	1.6	3.2	10	0.8	5	2	6	18	10	18	4.8	RTI 7065
1.5	6.4	1.6	3.2	10	0.8	5	2	6	18	10	18	4.8	RTI 7066
1.5	6.4	1.6	3.2	12	0.8	5	1	6	18	10	17	4.8	RTI 7067
2.5	3.2	2.3	3.9	6.5	0.8	5	1	3.5	12.7	10	14.5	5.5	RTI 7068
2.5	3.7	2.3	3.9	6.5	0.8	5	1	3.5	12.7	10	14.5	5.5	RTI 7069
2.5	3.7	2.3	3.9	8	0.8	5	2	5	16	10	17	5.5	RTI 7070



www.swastiklugs.in
spsslugs@yahoo.in


Swastik Copper Insulated Ring tongue Terminal ends for solderless Crimping to Copper / Aluminium Conductors.

Area mm ²	E	A	C	D	F	B	K	H	J	J-1	L-3	C-1	Swastik Cat No.
2.5	4.2	2.3	3.9	8	0.8	5	2	5	16	10	17	5.5	RTI 7071
2.5	5.2	2.3	3.9	8	0.8	5	2	5	16	10	17	5.5	RTI 7072
2.5	5.2	2.3	3.9	10	0.8	5	1	7	18	10	18	5.5	RTI 7073
2.5	6.4	2.3	3.9	10	0.8	5	1	7	18	10	18	5.5	RTI 7074
2.5	5.2	2.3	3.9	12	0.8	5	2	9	22	10	21	5.5	RTI 7075
2.5	6.4	2.3	3.9	12	0.8	5	2	9	22	10	21	5.5	RTI 7076
2.5	8.2	2.3	3.9	12	0.8	5	2	9	22	10	21	5.5	RTI 7077
2.5	6.4	2.3	3.9	16	0.8	5	2	10	25	10	22	5.5	RTI 7078
2.5	8.2	2.3	3.9	16	0.8	5	2	10	25	10	22	5.5	RTI 7079
2.5	10.2	2.3	3.9	16	0.8	5	2	10	25	10	22	5.5	RTI 7080
2.5	10.2	2.3	3.9	18	0.8	5	1	14	29	10	25	5.5	RTI 7081
2.5	12.7	2.3	3.9	18	0.8	5	1	14	29	10	25	7.1	RTI 7082
4.6	4.2	3.5	5.5	8	1.0	6	2	5	17	14	21	7.1	RTI 7083
4.6	5.2	3.5	5.5	8	1.0	6	2	5	17	14	21	7.1	RTI 7084
4.6	4.2	3.5	5.5	10	1.0	6	3	5	19	14	21	7.1	RTI 7085
4.6	5.2	3.5	5.5	10	1.0	6	3	5	19	14	21	7.1	RTI 7086
4.6	5.2	3.5	5.5	8	1.0	6	3	9	22	14	26	7.1	RTI 7087
4.6	5.2	3.5	5.5	12	1.0	6	2	6	20	14	22	7.1	RTI 7088
4.6	6.4	3.5	5.5	12	1.0	6	2	6	20	14	22	7.1	RTI 7089
4.6	8.2	3.5	5.5	12	1.0	6	2	6	20	14	22	7.1	RTI 7090
4.6	5.2	3.5	5.5	12	1.0	6	3	7	22	14	24	7.1	RTI 7091
4.6	6.4	3.5	5.5	12	1.0	6	3	7	22	14	24	7.1	RTI 7092
4.6	6.4	3.5	5.5	14	1.0	6	2	10.5	25.5	14	26.5	7.1	RTI 7093
4.6	8.2	3.5	5.5	14	1.0	6	2	10.5	25.5	14	26.5	7.1	RTI 7094
4.6	9.7	3.5	5.5	14	1.0	6	2	10.5	25.5	14	26.5	7.1	RTI 7095
4.6	8.2	3.5	5.5	16	1.0	6	3	13	30	14	30	7.1	RTI 7096
4.6	10.2	3.5	5.5	16	1.0	6	3	13	30	14	30	7.1	RTI 7097
4.6	8.2	3.5	5.5	18	1.0	6	3	12	30	14	30	7.1	RTI 7098
4.6	10.2	3.5	5.5	18	1.0	6	3	12	29	14	30	7.1	RTI 7099
4.6	12.7	3.5	5.5	18	1.0	6	3	12	29	14	30	7.1	RTI 7100



www.swastiklugs.in
spsslugs@yahoo.in

Swastik Copper Ring tongue Terminal ends (Insulated) for solderless Copper / Aluminium Conductors.

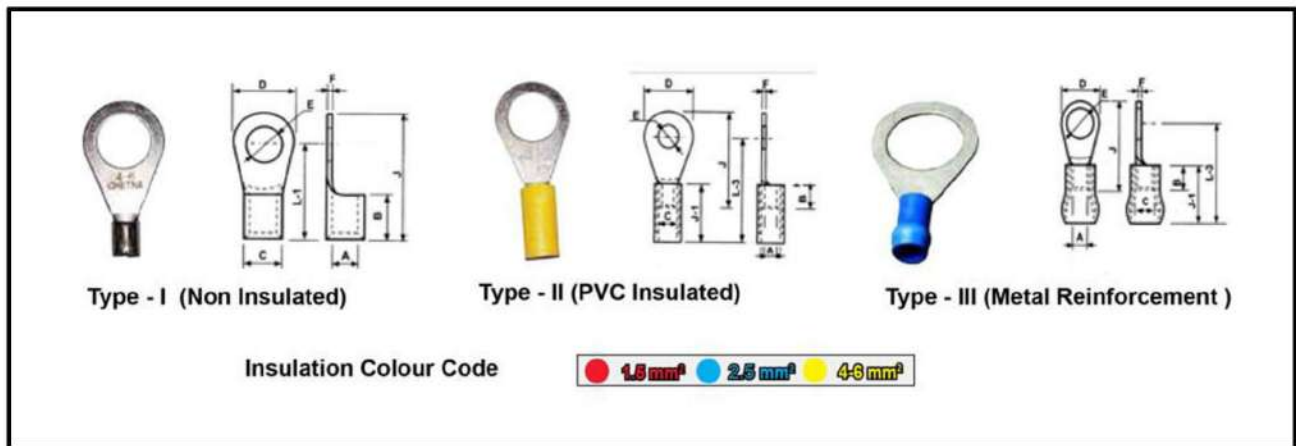

COLOUR CODING OF INSULATION SLEEVE

SIZE:	1.5	2.5	4.6	10	16
COLOUR:	RED	YELLOW	BLUE	BLACK	BLACK

Area mm ²	E	A	C	D	F	B	K	H	J	J-1	L-3	C-1	Swastik Cat No.
10	4.2	4.3	6.3	10	1.0	8	2	7	22	16	25	7.9	RTI7389
10	5.2	4.3	6.3	10	1.0	8	2	7	22	16	25	7.9	RTI7390
10	4.2	4.3	6.3	10	1.0	8	3	4	20	16	23	7.9	RTI7391
10	5.2	4.3	6.3	10	1.0	8	3	4	20	16	23	7.9	RTI7392
10	6.4	4.3	6.3	12	1.0	8	2	7	23	16	25	7.9	RTI7393
10	8.2	4.3	6.3	16	1.0	8	4	7	27	16	27	7.9	RTI7394
10	8.2	4.3	6.3	18	1.0	8	4	9	30	16	29	7.9	RTI7395
10	10.2	4.3	6.3	18	1.0	8	4	9	30	16	29	7.9	RTI7396
10	10.2	4.3	6.3	22	1.0	8	5	10	34	16	31	7.9	RTI7397
10	12.7	4.3	6.3	22	1.0	8	5	10	34	16	31	7.9	RTI7398
16	5.2	5.6	8.0	10	1.2	10	3	6	24	20	29	10	RTI7399

Tolerance = ± 5%



www.swastiklugs.in
spsslugs@yahoo.in

Swastik Copper Ring tongue Terminal ends (Insulated) for solderless Copper / Aluminium Conductors.


Area mm ²	E	A	C	D	F	B	K	H	J	J-1	L-3	C-1	Swastik Cat No.
16	5.2	5.6	8.0	12	1.2	10	4	6	26	20	30	10	RTI7400
16	6.4	5.6	8.0	12	1.2	10	4	6	26	20	30	10	RTI7401
16	6.4	5.6	8.0	16	1.2	10	4	8	30	20	32	10	RTI7402
16	8.2	5.6	8.0	16	1.2	10	4	8	30	20	32	10	RTI7403
16	7.9	5.6	8.0	16	1.2	10	4	8	30	20	32	10	RTI7404
16	8.2	5.6	8.0	18	1.2	10	4	10	33	20	34	10	RTI7405
16	10.2	5.6	8.0	18	1.2	10	4	10	33	20	34	10	RTI7406
16	10.2	5.6	8.0	22	1.2	10	6	8	35	20	34	10	RTI7407
16	12.7	5.6	8.0	22	1.2	10	6	8	35	20	34	10	RTI7408

Tolerance = $\pm 5\%$



www.swastiklugs.in
spsslugs@yahoo.in

Swastik Copper Ring tongue Terminal ends (Insulated with metal Reinforcement) for solderless Crimping to Copper or Aluminium Conductors

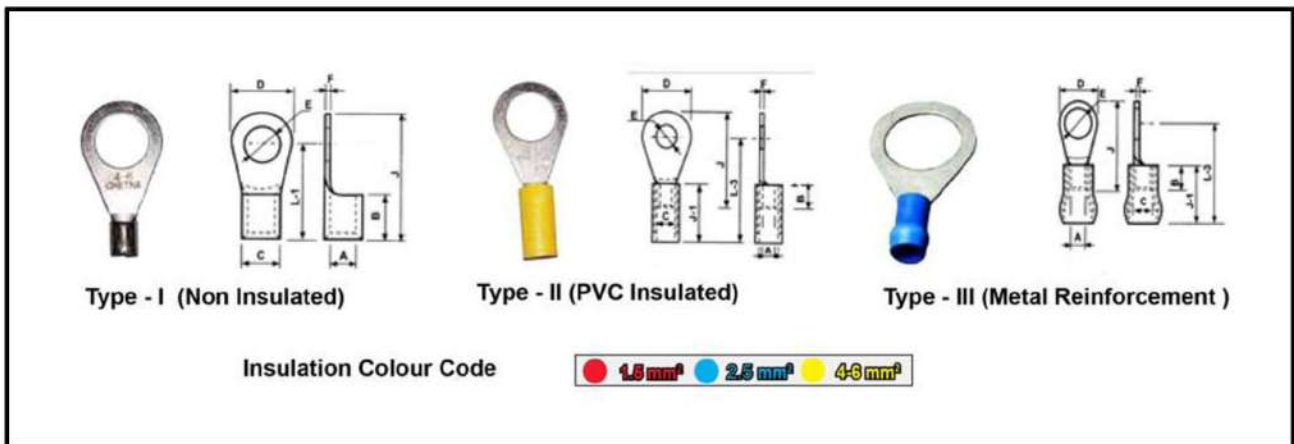

Area mm ²	E	A	C	D	F	B	K	H	J	J-1	A-1	C-1	C-2	L-3	Swastik Cat No.
1.5	2.2	1.6	3.2	6.0	0.8	5	2	4.0	14.0	10	3.6	4.8	5.4	16	RTR 7435
1.5	2.6	1.6	3.2	6.0	0.8	5	2	4.0	14.0	10	3.6	4.8	5.4	16	RTR 7436
1.5	3.2	1.6	3.2	6.0	0.8	5	2	4.0	14.0	10	3.6	4.8	5.4	16	RTR 7437
1.5	3.7	1.6	3.2	6.0	0.8	5	2	4.0	14.0	10	3.6	4.8	5.4	16	RTR 7438
1.5	4.2	1.6	3.2	6.0	0.8	5	2	4.0	14.0	10	3.6	4.8	5.4	16	RTR 7439
1.5	3.2	1.6	3.2	6.8	0.8	4	1	3.0	11.4	10	3.6	4.8	5.4	14.6	RTR 7440
1.5	3.7	1.6	3.2	6.8	0.8	4	1	3.0	11.4	10	3.6	4.8	5.4	14.6	RTR 7441
1.5	4.2	1.6	3.2	6.8	0.8	4	1	3.0	11.4	10	3.6	4.8	5.4	14.6	RTR 7442
1.5	3.2	1.6	3.2	8.0	0.8	5	2	5.0	16.0	10	3.6	4.8	5.4	17	RTR 7443
1.5	4.2	1.6	3.2	8.0	0.8	5	2	5.0	16.0	10	3.6	4.8	5.4	17	RTR 7444
1.5	5.2	1.6	3.2	8.0	0.8	5	2	5.0	16.0	10	3.6	4.8	5.4	17	RTR 7445
1.5	4.2	1.6	3.2	7.0	0.8	5	1	5.0	14.5	10	3.6	4.8	5.4	16	RTR 7446
1.5	4.2	1.6	3.2	10.0	0.8	5	2	6.0	18.0	10	3.6	4.8	5.4	18	RTR 7447
1.5	5.2	1.6	3.2	10.0	0.8	5	2	6.0	18.0	10	3.6	4.8	5.4	18	RTR 7448
1.5	6.4	1.6	3.2	10.0	0.8	5	2	6.0	18.0	10	3.6	4.8	5.4	18	RTR 7449
1.5	6.4	1.6	3.2	12.0	0.8	5	1	6.0	18.0	10	3.6	4.8	5.4	17	RTR 7450
2.5	3.2	2.3	3.9	6.5	0.8	5	1	3.5	27.7	10	4.4	5.4	6.0	17.7	RTR 7451
2.5	3.7	2.3	3.9	6.5	0.8	5	1	3.5	27.7	10	4.4	5.4	6.0	17.7	RTR 7452

Tolerance = ± 5%



www.swastiklugs.in
spsslugs@yahoo.in

Swastik Copper Ring tongue Terminal ends (Insulated with metal Reinforcement) for solderless Crimping to Copper or Aluminium Conductors

Area mm ²	E	A	C	D	F	B	K	H	J	J-1	A-1	C-1	C-2	L-3	Swastik Cat No.
2.5	3.7	2.3	3.9	8.0	0.8	5	2	5.0	16.0	10	4.4	5.4	6.0	17	RTR 7453
2.5	4.2	2.3	3.9	8.0	0.8	5	2	5.0	16.0	10	4.4	5.4	6.0	17	RTR 7454
2.5	5.2	2.3	3.9	8.0	0.8	5	2	5.0	16.0	10	4.4	5.4	6.0	17	RTR 7455
2.5	5.2	2.3	3.9	10.0	0.8	5	1	7.0	18.0	10	4.4	5.4	6.0	18	RTR 7456
2.5	6.4	2.3	3.9	10.0	0.8	5	1	7.0	18.0	10	4.4	5.4	6.0	18	RTR 7457
2.5	5.2	2.3	3.9	12.0	0.8	5	2	9.0	22.0	10	4.4	5.4	6.0	21	RTR 7458
2.5	6.4	2.3	3.9	12.0	0.8	5	2	9.0	22.0	10	4.4	5.4	6.00	21	RTR 7459
2.5	8.2	2.3	3.9	12.0	0.8	5	2	9.0	22.0	10	4.4	5.4	6.0	21	RTR 7460
2.5	6.4	2.3	3.9	16.0	0.8	5	2	10.0	25.0	10	4.4	5.4	6.0	22	RTR 7461
2.5	8.2	2.3	3.9	16.0	0.8	5	2	10.0	25.0	10	4.4	5.4	6.0	22	RTR 7462
2.5	10.2	2.3	3.9	16.0	0.8	5	2	10.0	25.0	10	4.4	5.4	6.0	22	RTR 7463
2.5	10.2	2.3	3.9	18.0	0.8	5	1	14.0	29.0	10	4.4	5.4	6.0	25	RTR 7464
2.5	12.7	2.3	3.9	18.0	0.8	5	1	14.0	29.0	10	4.4	5.4	6.0	25	RTR 7465
4.6	4.2	3.5	5.5	8.0	1.0	6	2	5.0	17.0	15	4.4	5.4	6.0	22	RTR 7466
4.6	5.2	3.5	5.5	8.0	1.0	6	2	5.0	17.0	15	4.4	5.4	6.0	22	RTR 7467
4.6	4.2	3.5	5.5	10.0	1.0	6	3	5.0	19.0	15	6.4	7.1	8.6	23	RTR 7468
4.6	5.2	3.5	5.5	1.0	1.0	6	3	5.0	19.0	15	6.4	7.1	8.6	23	RTR 7469
4.6	5.2	3.5	5.5	8.0	1.0	6	3	9.8	22.8	15	6.4	7.1	8.6	31.8	RTR 7470
4.6	5.2	3.5	5.5	12	1.0	6	2	6	22	15	6.4	7.1	8.6	23	RTR 7471
4.6	6.4	3.5	5.5	12	1.0	6	2	6	20	15	6.4	7.1	8.6	23	RTR 7472
4.6	8.2	3.5	5.5	12	1.0	6	2	6	20	15	6.4	7.1	8.6	23	RTR 7473
4.6	5.2	3.5	5.5	12	1.0	6	3	7	22	15	6.4	7.1	8.6	25	RTR 7474
4.6	6.4	3.5	5.5	12	1.0	6	3	7	22	15	6.4	7.1	8.6	25	RTR 7475
4.6	6.4	3.5	5.5	14	1.0	6	2	10.5	25.5	15	6.4	7.1	8.6	27.5	RTR 7476
4.6	8.2	3.5	5.5	14	1.0	6	2	10.5	25.5	15	6.4	7.1	8.6	27.5	RTR 7477
4.6	9.7	3.5	5.5	14	1.0	6	2	10.5	30.0	15	6.4	7.1	8.6	27.5	RTR 7478
4.6	8.2	3.5	5.5	16	1.0	6	3	13.0	30.0	15	6.4	7.1	8.6	31	RTR 7479
4.6	10.2	3.5	5.5	16	1.0	6	3	13.0	30.0	15	6.4	7.1	8.6	31	RTR 7480
4.6	8.2	3.5	5.5	18	1.0	6	3	12.0	30.0	15	6.4	7.1	8.6	30	RTR 7481
4.6	10.2	3.5	5.5	18	1.0	6	3	12.0	30.0	15	6.4	7.1	8.6	30	RTR 7482
4.6	12.2	3.5	5.5	18	1.0	6	3	12.0	30.0	15	6.4	7.1	8.6	30	RTR 7483

Tolerance = ± 5%