



www.swastiklugs.in  
spsslugs@yahoo.in

## Cable Glands (Indian Standard)


### Technical Specification

Material :	Brass (IS-319) Standard (Al. / S.S. / M.S. also available)
Plating :	Nickel Plated Standard (Chrome also available)
Entry Threads :	BSC Standard (PG / Metric / NPT / BSP / also available)
Sealing Rubber Ring :	Nitrile / Neoprene
Gland Standard :	BS 6121
Ingress Protection :	IP 66 as per IS 12063
Test Certi. No.	
Series	MAKE – SWASTIK

### Application:

Used in normal climatic condition for armoured & unarmoured cables.

### Fitting Sequence:

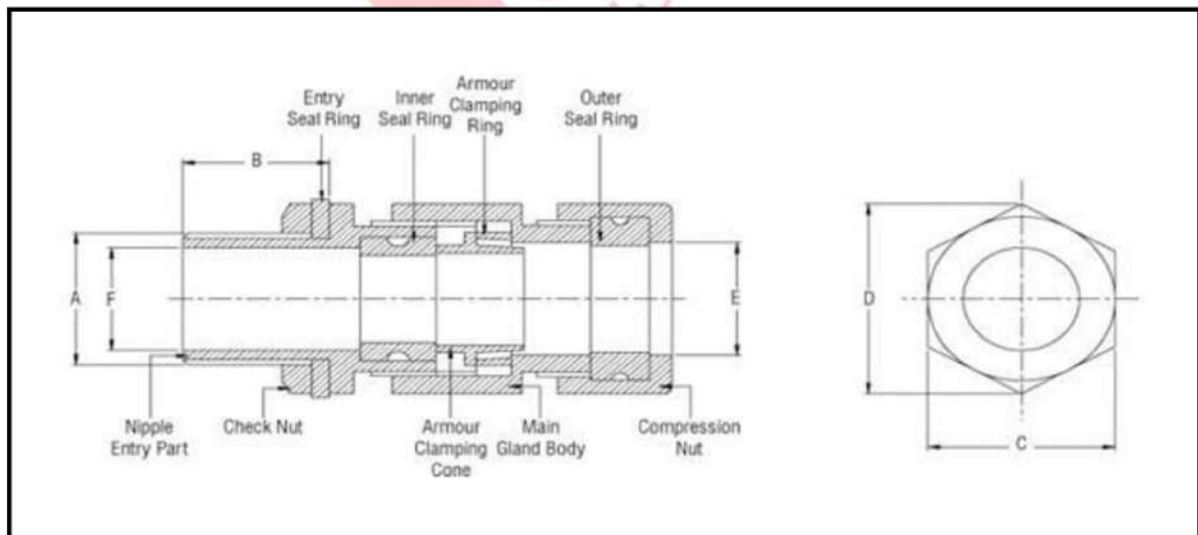



www.swastiklugs.in  
spsslugs@yahoo.in

## Cable Glands (Indian Standard)

Suitable Cable Overall Dia		SBWN Code	A Nipple Entry	B Length	C (A/F)	D (A/C)	E Dia.	F Dia
From	To	SBWN Series	Inches	mm	mm	mm	Ø mm	Ø mm
6.0	12.0	SBWN 01SS	3/4"	13.0	21.0	24.0	13.0	14.5
12.0	16.5	SBWN 01S	3/4"	15.0	25.0	29.0	18.0	14.5
16.5	18.5	SBWN 01	3/4"	15.0	27.5	31.5	19.0	14.5
16.5	18.5	SBWN 01A	1"	15.0	27.5	31.5	19.0	14.5
18.5	20.0	SBWN 02	1"	15.0	30.0	34.5	21.0	18.0
18.5	20.0	SBWN 02A	3/4"	15.0	30.0	34.5	21.0	14.5
20.0	23.0	SBWN 03	1"	15.0	31.5	36.0	23.5	19.0
23.0	26.0	SBWN 04	1"	15.0	36.0	41.5	27.0	20.5
23.0	26.0	SBWN 04A	1 1/4"	15.0	36.0	41.5	27.0	22.0
26.0	30.0	SBWN 05	1 1/4"	15.0	41.0	47.0	31.0	25.5
26.0	30.0	SBWN 05A	1 1/2"	15.0	41.0	47.0	31.0	27.0
30.0	33.0	SBWN 06	1 1/2"	15.0	47.0	54.0	34.5	31.0
30.0	33.0	SBWN 06A	1 1/4"	15.0	47.0	54.0	34.5	27.0
33.0	37.0	SBWN 07	1 1/2"	15.0	50.0	57.0	38.0	32.0
37.0	41.0	SBWN 08	2"	15.0	56.0	64.0	42.5	38.5

**TOLERANCE = ± 5%**



www.swastiklugs.in  
spsslugs@yahoo.in

## Cable Glands (Indian Standard)

Suitable Cable Overall Dia		SBWN Code	A Nipple Entry	B Length	C (A/F)	D (A/C)	E Dia.	F Dia
From	To	SBWN Series	Inches	mm	mm	mm	Ø mm	Ø mm
41.0	46.0	SBWN 09	2"	15.0	59.0	67.0	47.0	40.0
46.0	52.0	SBWN 010	2"	20.0	67.0	77.0	53.0	44.0
46.0	52.0	SBWN 010A	2 1/2"	20.0	67.0	77.0	53.0	48.0
52.0	54.0	SBWN 011S	2 1/2"	20.0	74.0	85.0	57.0	51.0
54.0	61.0	SBWN 011	2 1/2"	20.0	80.0	92.0	62.0	56.5
61.0	66.0	SBWN 012	3"	20.0	85.0	98.0	68.0	64.0
66.0	72.0	SBWN 013A	3"	20.0	90.0	103.0	73.0	67.0
72.0	78.0	SBWN 013	3 1/4"	20.0	99.0	113.0	80.0	74.0
78.0	84.0	SBWN 014	3 1/2"	20.0	105.0	121.0	85.0	78.0
84.0	94.0	SBWN 015	4"	20.0	114.0	132.0	98.0	90.5
94.0	104.0	SBWN 016	4 1/2"	20.0	130.0	149.0	106.0	101.0

**TOLERANCE = ± 5%**



www.swastiklugs.in  
spsslugs@yahoo.in

## "SWASTIK" Double Compression Cable Glands Suitable For Armoured Cables

CABLE DIMENSION							
SIZE	A ( MM) ( CABLE DIA)	B (MM) (OVERALL DIA)	THREAD		E (ACROSS FLAT ) MM	F (ACROSS CORNER) MM	
			C	D (LENGTH) MM			
							DIA (MM)
28mm	24.1	26.5	27.6	22.0	34.0	39.5	
35MM	29.8	34.5	34	23.0	42.0	48.0	
50mm	45.6	48.6	50	24.0	58.3	66.5	