


CP-DNW-HP8H2-96-V3

10 Ports Switch with 8 x 100M PoE Ports & 2 x 100M Uplink Ports

- 8, 100Mbps; RJ45 ports; Max. 30W Output of Single PoE Port
- Support IEEE802.3i/802.3u/802.3x
- 2, 10/100Mbps; Transmission Distance: 0-100m

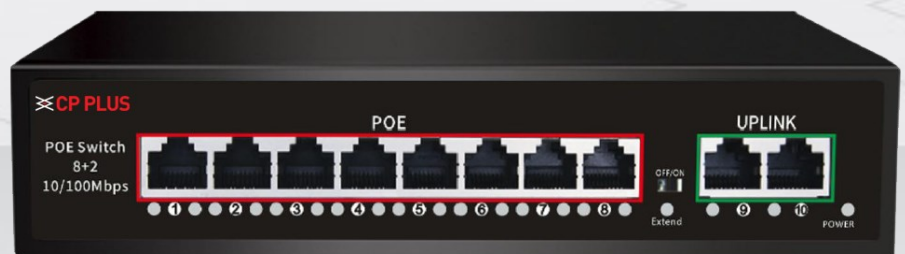

System Overview

As most of the CP PLUS products have been integrated with the Power of Ethernet technology which makes troubleshooting easier in case any errors occur. This can be done with the help of a PoE Switch makes increases reliability rapidly.

Functions

RJ45 Connector

The Registered Jack 45 is the ubiquitous ethernet style data port that is found on switches, routers, and network cards. The RJ45 style connectors and ports are so commonly used that they have become the primary type of port to be used for ethernet networking. It looks similar to a telephone jack, but is slightly wider.



CP-DNW-HP8H2-96-V3

10 Ports Switch with 8 x 100M PoE Ports & 2 x 100M Uplink Ports

Functions

Better Connectivity

This PoE Switch has designed for outstanding power with flexible placement for better and advanced connectivity between network devices.

Switching Performance

This PoE Switch offers the forwarding capacity to simultaneously process traffic on all ports at line rate without any packet loss.

About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedented levels even when compared to international competitors.



CP-DNW-HP8H2-96-V3

10 Ports Switch with 8 x 100M PoE Ports & 2 x 100M Uplink Ports

Feature	Specification
Uplink Ports	2, 100Mbps; Transmission Distance: 0-100m
Network Protocol	IEEE802.3i/802.3u/802.3x
Switch Capacity	2 Gbps Full duplex
Packet Forwarding Rate	0.1488Mpps/port
PoE Ports	8, 10/100Mbps; RJ45 ports; Max. 30W Output of Single PoE Port Transmission distance:0~250m
Network Ports	10
MAC Address List	2K
PoE Standard	IEEE802.3af, IEEE802.3at
Vlan	Support
Watchdog	Support
PoE Power Supply	1/2(+), 3/6(-)
Transmission Distance	0-100m/100Mbps Max. 250m/10Mbps via Cat.5e or more under Extend mode
PoE Power Budget	96W
PoE Feature	All ports support MDI/MDIX
Power Indicator	Light on: Powering ; Light off: No Power
Extend Indicator	Light on: VLAN mode & Extend mode ; Light off: normal mode
Port 1-10 indicator	Green light flash slowly: Searching for device Red light on: Powering but data disconnected Green light flash quickly: Data Transmitting
ESD	Air discharge: 1.5KV ; Contact discharge: 1.5KV
Forwarding Mode	Store-and-forward
Power Source	Built-in Power Supply, Input: 110-264V AC, 50/60Hz
Power Consumption	<5W

Feature	Specification
Operating Temperature	-10°C~ -50°C
Storage Temperature	-40°C ~ 70°C
Anti-thunder Level	Common mode: 2KV ; Differential mode: 1.5KV
Humidity	10%-95% , non-condensing
Dimensions	220mm x 140mm x 45mm
Color	Black
Weight	0.8Kg (not include input cable & packaging)