

JPSS 2000


Stainless Steel Hand Pallet Trolley



- All parts are stainless including Hydraulic Pump, Fork Frame, Handle, PushRod, Bearing, Pin and Bolt, etc
- Fully sealed Hydraulic Coated Pump
- Pressure Relief Valve/Overload Valve
- Three position handle-Lift-Neutral-Lower
- Tandem Nylon Load Rollers & Steering Wheels
- Ideal for use in Food Industries, Dairy, Canning & areas where Corrosive Acids & Saline Solutions are used

Specifications:

Item/ Type	Nos	JPSS 2000
Capacity	Kg	2000
Min. fork height	h13 (mm)	85
Max. fork height	h3 (mm)	195
Steering Wheel	mm	φ180 x 50
Load Roller Tandem	mm	75 x 70
Size of Fork	s x e (mm)	160 x 50
Width Overall Forks	b5 (mm)	680 / 550
Fork Length	l (mm)	1150
Overall length	(mm)	1533
Ground Clearance, centre of wheelbase	m2 (mm)	40
Aisle width for pallets 1000x1200 crossways	Ast (mm)	1733 / 1803
Aisle width for pallets 800x1200 lengthways	Ast (mm)	1783 / 1803
Turning Radius	Wa (mm)	1300
Service Weight	kg	65-80
Wheels	tyres	Nylon / Polyurethane

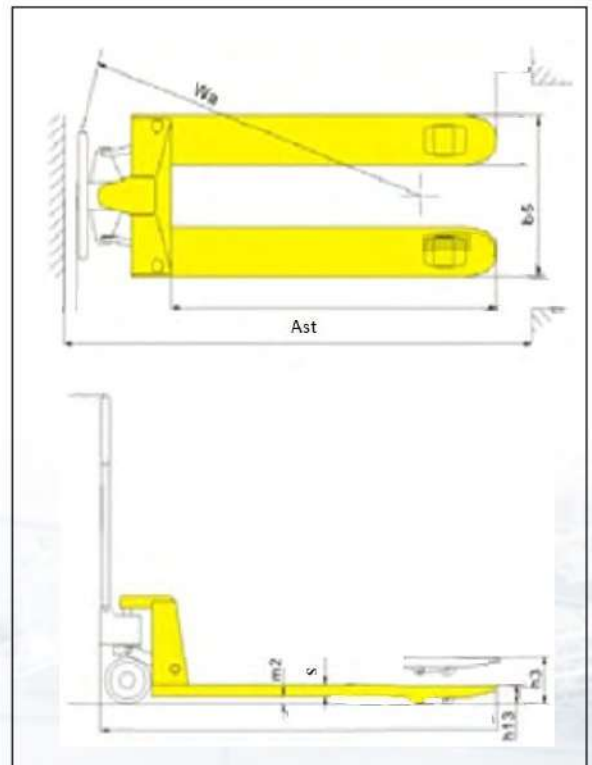

• Materials and specification are subjectd to change

For any special requirements, Please contact Jost's H.O., Dimensions indicated here are subject to variations of ± 20 mm and performance ± 10%. Service weight ± 50 kg. Right to make changes and technical improve

Pioneers In Material Handling Solutions

Platform Trucks



Electric Tow Trucks



Hand Pallet Trucks, Manual Stackers



Dock Levelers



Jopicker



Electric Stackers



Electric Pallet Trucks



Reach Trucks



Electric Forklift



Diesel Forklift



Customise Product



Racking Systems



Scissor Lift



For more details, please contact:



Since 1907

Jost's Engineering Company Limited

C-7 Wagle Industrial Estate, Road No. 12, Thane - 400 604. Maharashtra. INDIA.

T.: +91 22 6267 4000 E.: jostfact@josts.in W.: www.josts.com

Bengaluru : +91 80 4123 4775 / 4123 4885 Chennai : +91 44 2626 8536 / 2628 8407 Delhi : +91 11 4160 7989 Kolkata : +91 33 2242 9510 / 4008 1242
Pune : +91 20 2543 4565 / 2543 4390 Secunderabad : +91 40 2771 4934 / 44 / 54 Vadodara : +91 265 2351 642

Dial-a-care: 1800-2745-661