

OptiVision®


Expanding Digital Technologies



WDM EDFA
MODEL NO. OV-19x4



19 x 4

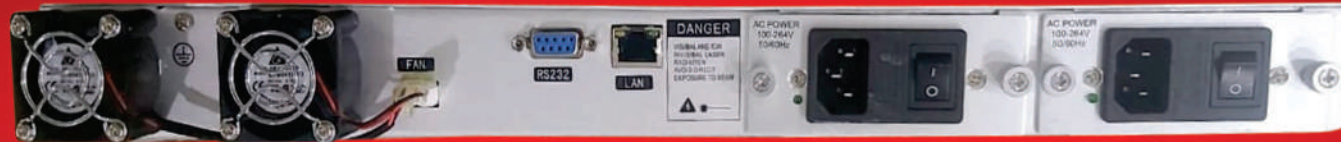

Description :-

FTTH Network. & CATV Network.

Optical output power : total output upto 10W.

Low noise figure : < 5db when input is 0dBm.

Single-mode fiber 1550 amplification network.

Adopts Er Yb Codoped double-clad fiber technology.

Out ports : 4-64 optional. Optical out : 16-23dbm optional.

Intelligent temperature control system make the power consumption lower.

Perfect network management interface, in line with SNMP network management.

Wave length 1550(catv) 1310/1490	OPTICAL OUTPUT at 1550 - 19dBm	ECO FRIENDLY	CONNECTOR SC-APC & SC-UPC	High Power JDSU PUMP
Optical Input -3dBm ~ +10dBm	OPTICAL LOSS 1310/1490 - 0.5 ~ 0.7dBm	DUAL POWER 48VDC & 220VAC	FTTH - FTTB FTTH NETWORK	HD + DIGITAL READY