# **Hitwin RESmart GII BPAP**

**Bi-level Positive Airway Pressure** With Ti Min/ Ti Max

Sleep Well, Live Better **RESmart GII BPAP Series provide non-invasive ventilation** for patients with respiratory insufficiency in hospital or at

home. Ti Min/ Ti Max ensure inspiration time and

14/6/8 21:45

PR 70

improve the treatment effect significantly

# **Eco Smart Technology**

20 min

Eco Smart heating system with innovative dual water chambers design. Eco Smart warm up, high efficiency, lower water bills.

### iCode II

Ramp

Mode Auto

Compliance Data is encoded by QR code. More information - less information input.

## Ti Min/Ti Max


Ensure inspiration time. Improve the treatment effect significantly.



High-efficiency humidification

Quieter therapy output





Real time pressure & flow wave display.


#### Oximeter

Blood oxygen saturation and pulse rate display.














| Parameter Product                    | T - 20S  | T - 20A       | T - 20T         | T - 25S  | T - 25A       | T - 25T         | T - 30T         |
|--------------------------------------|--|---------------|-----------------|--|---------------|-----------------|-----------------|
| Mode                                 | CPAP, S  | CPAP, AUTO, S | CPAP, S, T, S/T | CPAP, S  | CPAP, AUTO, S | CPAP, S, T, S/T | CPAP, S, T, S/T |
| Pressure                             | 4 - 20 cm H₂O  |               |                 | 4 - 25 cm H <sub>2</sub> O 4-30 cm H <sub>2</sub> O        |               |                 |                 |
| LCD Screen                           | 2.4 inches   |               |                 | 3.5 inches   |               |                 |                 |
| Weight                               | 5.5 lb (2.5 kg) with humidifier                            |               |                 | 5.5 lb (2.5 kg) with humidifier                            |               |                 |                 |
| Dimensions (L $\times$ W $\times$ H) | 11.4" × 7.7" × 5.3" (290 × 196 × 134 mm)<br>with humidifer |               |                 | 11.4" × 7.7" × 5.3" (290 × 196 × 134 mm)<br>with humidifer |               |                 |                 |
| Oximeter                             | Optional   |               |                 | Optional   |               |                 |                 |
| Data Storage                         | SD Card  |               |                 | SD Card  |               |                 |                 |
| Reslex                               | Off/ 1/ 2/ 3   |               |                 | Off/ 1/ 2/ 3   |               |                 |                 |
| Ramp P                               | 4 cm H <sub>2</sub> O                                      |               |                 | 4 cm H₂O   |               |                 |                 |
| Max Ramp                             | 0 - 60 minutes   |               |                 | 0 - 60 minutes   |               |                 |                 |
| Ramp Time                            | 0 - Max Ramp   |               |                 | 0 - Max Ramp   |               |                 |                 |
| Humidity Level                       | off/ 1 - 5   |               |                 | off/ 1 - 5   |               |                 |                 |
| Ti Min                               | 0.1 s - Ti Max   |               |                 | 0.1 s - Ti Max   |               |                 |                 |
| Ti Max                               | 0.3 s - 3.0 s  |               |                 | 0.3 s - 3.0 s  |               |                 |                 |

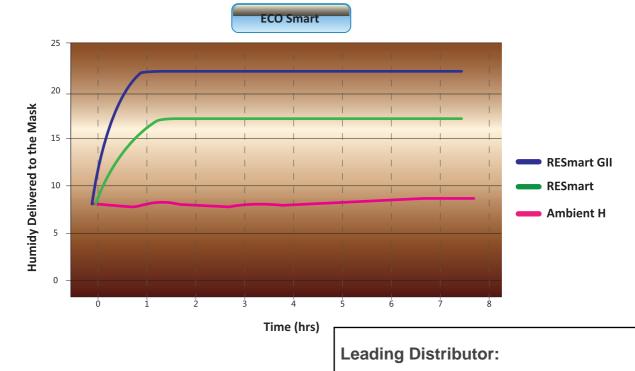

*Hitwin Healthcare Pvt. Ltd.* 7/10, Jaganathan Nagar 2nd Main Road, *Arumbakkam, Chennai, India - 600106.* Ph: 91 44 4684 5555 (20 Lines), 91 44 4233 3313 Mob: 91 93441 66778

www.hitwinhealthcare.com