

WINONE AQUAFENCE

Water Repellent Coatings for all Porous Stones, Concrete, Bricks and Walls


PRODUCT BROCHURE



PRODUCT INTRODUCTION

WINONE AQUAFENCE is a Super Hydrophobic Water/Solvent-based Non-film forming UV resistant coating for porous Building Materials from harmful effects of humidity, efflorescence and provides protection against moss and fungal growth.

WINONE AQUAFENCE will not be impacting look, feel and breathability of porous surfaces. Available in solvent and water based formulation as per site application.

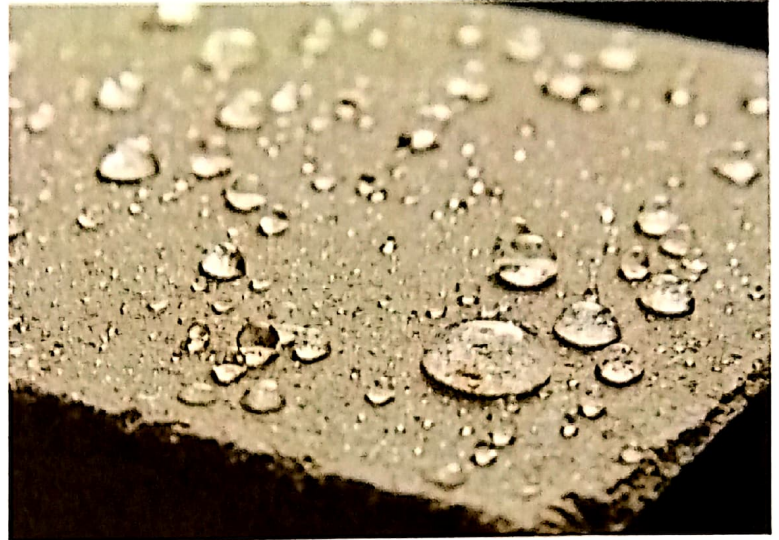

APPLICATIONS

- External / Internal Plaster
- Stone Facade
- Red Agra, Dholpur Stone
- Laterite, Mandan Stone
- Exposed Concrete Facade
- Brick Facade

KEY FEATURES



Beading Effect on any surface



Non Film Forming, retains original texture



Available in Water and Solvent base

ADVANTAGES

- Excellent Water Repelling Properties
- Long Lasting > 5 years
- Prevents ingress of water borne chlorides and sulphates
- Doesn't block breathability
- No Peeling off or Erosion
- Prevents Efflorescence
- UV Resistant
- Invisible layer after drying
- Prevents growth of Moss



WINONE
Product Technologies



Industrial and Functional Coatings



www.winone.in



Pune, Maharashtra, India

WINONE AQUAFENCE

Water Repellent Coatings for all Porous Stones, Concrete and Walls

PRODUCT BROCHURE

HOW TO APPLY

- Surface Preparation - Make surface clean of dust, dirt, oil and stains
- To remove Efflorescence, Fungus / Mold, use Winone Blowwash to clean the surface.
- Shake Winone Aquafence well before use and dilute
- Apply on dry surface till saturation
- Let the surface dry and cure up to 72 hrs

APPLICATION TOOLS

Can be applied using -

- Brush
- Roller
- Low Pressure Sprayer

STORAGE

- Store the Coating in a Clean and Dry place.
- Best Use before 12 months from the Date of Manufacturing



WINONE
Product Technologies



Industrial and Functional Coatings



www.winone.in



Pune, Maharashtra, India

TECHNICAL SPECIFICATIONS

• Physical State	- Liquid
• Appearance	- Transparent
• Odour	- Nil
• Ph	- 5.0 +-0.5
• Boiling Point	- 100 Deg. C
• Specific Gravity	- 1.0 +- 0.1
• UV	- Resistant
• VOC	- < 2gms / ltr

MIXING RATIO & COVERAGE

- Water based - Mix with water in ratio 1:8 to 1:10 dilution. Use good quality, potable water only.
- Solvent based - Ready to Use
- Coverage:
 - Water-based = 4-5 Sq mt
 - Solvent-based = 4-5 Sq mt

HEALTH AND SAFETY

- Respiratory Protection - Use under normal conditions with adequate ventilation, no special respiratory protection is required for water based version. For Solvent based version, apply in well ventilated areas
- Hand protection - Use latex gloves while application
- Skin Protection - No specific protection required
- Eye protection - Use protective eye gear while application
- If swallowed, contact your nearest doctor immediately.



For any further customer support, contact us at wpt@winsonprotech.com