



Shakti Rubber Industries

Plot 5/6, Krishna Industrial Estate Behind J.J. Complex, N.H. 48, Kadodara, Surat-394 327, Gujarat, INDIA

Phone # +91 2622 276501, Mobile: +91 98251 21459



Email: italia@shaktirubber.com Website: www.shaktirubber.com

SHAKTI LAMINATION ROLLERS

SHAKTI offer polymers designed to coat lamination rollers and specifically to spread mono-component, solvent free adhesives and for hot melt coating.

Salient features:

- ✓ Excellent metal rubber bonding
- ✓ Uniform hardness
- ✓ Dimensional grinding accuracy up to 5 microns
- ✓ Free from pin holes and surface defects
- ✓ Dynamically balanced
- ✓ Excellent surface finish
- ✓ Proper selection of polymers as per application
- ✓ Custom built to suit the different running speed of the machines and local atmospheric conditions

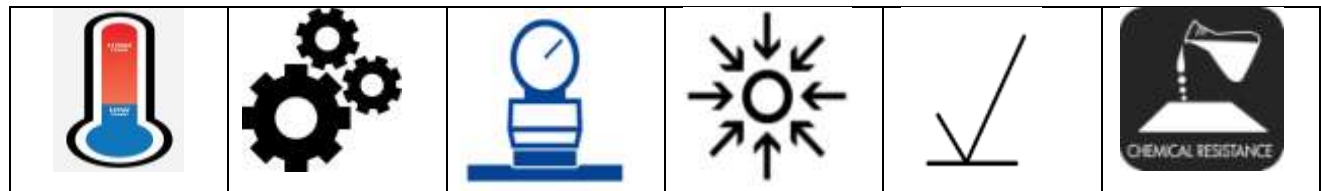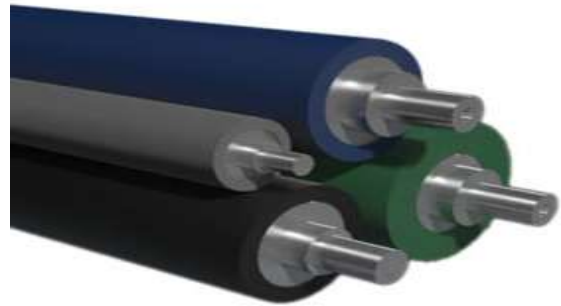

Maximum
Temperature 130°
C

Mechanical
Resistance

Hardness
60 to 95 Shore A
(+/-5)

Excellent
Pressure
Resistance

Surface
Ra Value
up to 0.500 μ

Gasoline, Alcohol,
Water, Isocyanate,
Ozone

SPECIFICATIONS

Color	White, Grey, Blue, Green, Black
Diameter	Upto 600 mm
Length including Shafts	Upto 6000 mm
Coating Thickness	5 mm to 35 mm
Surface Hardness	60 to 95 Shore A