

kds PUMPS

- the heart of Industry



 **One Stop
Pumping Solution...**




Technical Parameter


Model	Power	Max.Flow	Max. Head	Voltage	Material of pump body			Dimension(mm)				Weight (Kg)
					Cast Iron	Brass	Stanless steel	L	B	H	G	
RS15/6	93/67/46	2.6/2.0/1.2	6/5/3	O	O	O	O	130	127	133	1"	2.3
RS20/6				O	O	O	O	130	127	133	1"	2.4
RS25/8	165/115/75	5.4/3.6/2.0	8/7/5	O	O	O		180	127	159	1½"	3.4

Performance Chart


RS15/6

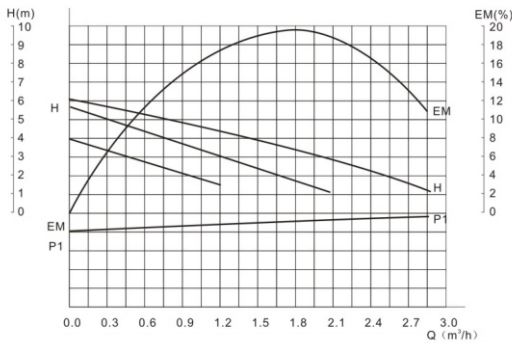

RS20/6

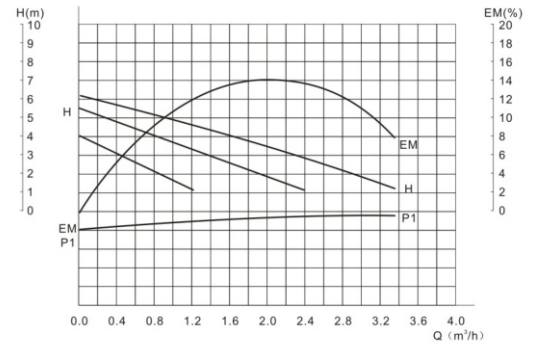

RS25/8

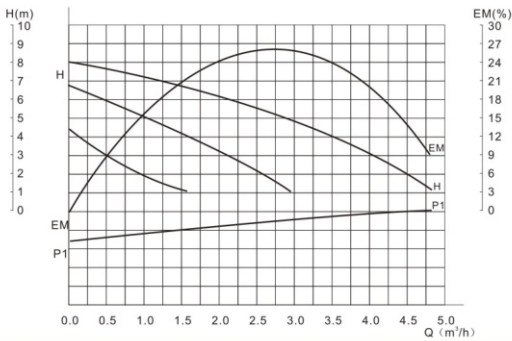

Operation condition:

1. Apply to heating system
2. Max. system pressure:3bar
3. Operation condition:
 Ambient Temperature:0°C~40°C
 Ambient Humidity:95%
 Liquid Tempreture:20°C~85°C
 Ambient temperature must be lower than liquid temperature, in order to avoid condensate water produced in the interior of stator.
4. Liquid : Clean, non-coorosive and non-explosive liquids, without any particle, fiber or mineral oil. Water/glycol mixtures max. mixing ratio:1:1
5. Dry running no more than 10s.