

TS2000-ULT

ULTRASOINC LEVEL TRANSMITTER - SWITCH



Features

- Non-contact type
- Automatic Temperature Compensation
- Measures liquid height, distance to liquid, volume or flow in open channels
- Backlit LCD display
- Narrow Beam Technology
- Durable SS-316 Enclosure offering superior corrosion resistance
- IP-68 Protection for reliable operation in harsh and wet environments



Technical Specifications

Performance Characteristics	
Measurement Principle	Ultrasonic : Time Of Flight
Measuring Range	up to 12 mtrs.
Power Supply	18-36 V DC
Power Consumption	< 500 mW
Display	Backlight LCD
Dead Band	Less than 300 mm
Response Time	1 Sec
Accuracy	± 0.25% F. S.
Linearity	+/- 0.1%
Repeatability	+/- 0.1%
Electrical Connection	M12 Connector
MOC Electronics Enclosure & Rating	SS-316 and IP-68
Enclosure	Weather Proof IP-68
Output	4 to 20 mA
Alarm or Relay Output	1 Relay Output (Optional)
Communication Output	RS-485 MODBUS RTU (Optional)
Process Temperature	200°C max
Operating Pressure	Atmospheric
Measuring Frequency	25 KHz
Beam Angle	< 7°
Temperature Coefficient	+/- 0.01% per °C
Ambient Conditions	Temperature :-20°C to 75°C / Humidity : 5 to 95% non-condensing
Insulation Resistance	>100 MΩ at 100VDC
Process Connection	2" BSP (12 meters)
Mounting	Vertical - Top of the tank
MOC Probe	PVDF
Material of Construction	All Wetted Parts SS-316
Weight	Less than 3 kg

TS2000-ULT

ULTRASOINC LEVEL TRANSMITTER - SWITCH



Assembly Overview


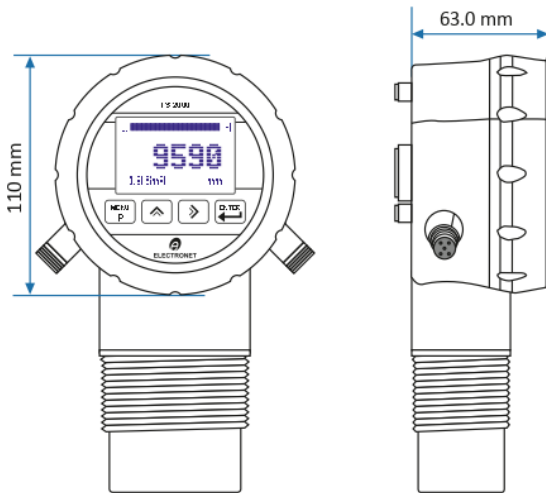


Fig. 1 Front View

Fig. 2 Side View

Connection Details

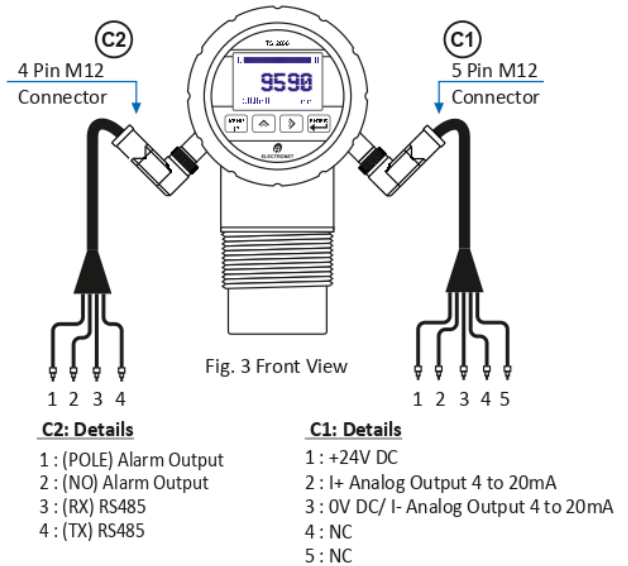

Ordering Information

Sample Order Code : TS 2000 ULT-A1-B1-C1-D1-E1

Parameter		Code	Description
A	Measuring Range	A1	300 mm
		A2	600 mm
		A3	1000 mm
		A4	2000 mm
		A5	3000 mm
		A6	6000 mm
		A7	8000 mm
		A8	10000 mm
		A9	12000 mm
B	Alarm or Relay Output	B1	1 Relay Output (Optional)
		BX	NA

Parameter		Code	Description
C	Communication Output 1	C1	RS485 (MODBUS RTU) (Optional)
		CX	NA
D	Ultrasoinc Sensor Moc	D1	PVC
		D2	PVDF
		DY	Other
E	Process Connection	E1	1&1/2" BSP (M)
		E2	2" BSP Threaded
		E3	2" SS-316 Flanged
		EY	Other

Note :

- Due to our continuous product revisions, design specification & model numbers are subject to change without notice.
- Accuracy defined at Lab Conditions.
- For other requirement please consult factory.
- This product is meant for laboratory/Process application only and not for custody transfer application.

ELECTRONET EQUIPMENTS PVT. LTD.

Registered Office:

Plot No. 84, 85, 86, Tiny Industrial Estate,
Kondhwa Budruk,
Pune-411 048, Maharashtra, India.

Factory Address:

Plot No. 8, (SEZ) Phase 1, Kesurdi MIDC,
Khandala, Dist.- Satara
Pin: 412 801, Maharashtra, India.

+91-20-26931476
+ 91 99229 31722
+ 91 99224 42183

ho@electronet.co.in
enquiries@electronet.co.in

www.eeplindia.com