

FL 600 PTC

FLOW INDICATOR TOTALISER



Features

- Temperature, Pressure compensated Flow
- Indication through LCD Display
- Input selectable as Linear / Square Root for Flow
- Normal Mode for Operation
- Averaging of Inputs for Turbulent Flow
- Programmable Low Flow Cut-Off
- Software Calibration



Description

Electronet series FL-600 PTC are micro-controller based Flow Indicator Totaliser designed for various industrial applications. These can be used for indication & totalisation of flow. The three individual input can be provided Flow, Temperature & Pressure. The built-in battery backup is provided for the memory to avoid loss of data in case of power failure. The micro-controller based design provides full flexibility for flow metering applications.

Technical Specifications


Performance Characteristics	
No. of Input	03 Nos.
Input	1) 4-20 mA / Voltage (0-5V / 1-5V)
	2) 4-20 mA / RTD for Temperature
	3) 4-20 mA for Pressure
Display	LCD Display for Flow Rate & Totalised Flow Indication
Range	Programmable (0 to 9999)
Accuracy	Better than +/- 0.25% of F. S.
Open Sensor Indication	Provided
Power Supply	90 - 250V AC, 50 Hz, 24 VDC
Power Consumption	Less than 10 VA
Temperature Drift	< 0.01% of F. S. per°C change
Response Time	< 100 mSec
Isolation	1.4 KV between Input, Output & Power Supply
Electronics Enclosure	1) DIN STD.
	2) Field Mount IP-65
	3) Flameproof (CMRI IIA IIB Certified)
Base Size	72 (H) x 144 (W) x 250 (D) in mm approx. for DIN Std. Enclosure
Mounting	Flush of the Panel for DIN Std. enclosure & wall mounting suitable for WP enclosure
Weight	2 Kg (Approx.)
Ambient Conditions	Temperature -20 to 55°C / Humidity 5 to 95% non condensing
Transmitter Supply	24V DC, 100 mA
Retransmission Output	4-20mA
Alarm Output	Potential free Relay Contact - 2 nos. (1 c/o, 1 Amp. @ 230 V AC) Configurable for High, Low & Batch
Communication Port	RS485 supporting MODBUS RTU protocol

FL 600 PTC


FLOW INDICATOR TOTALISER



Assembly Overview

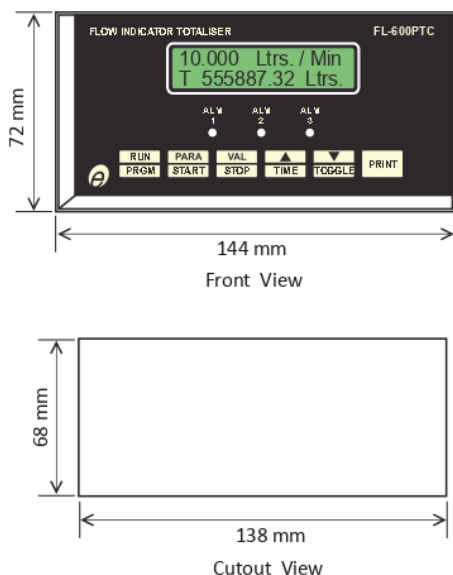

Installation Drawing

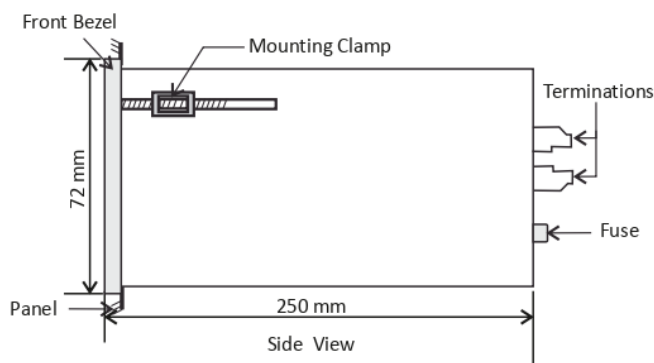

Ordering Information

Sample Order Code : FL 600 PTC-A1-B1-C1-D1-E1-F1-G1-H1-I1

Parameter	Code	Description	Parameter	Code	Description
A	Electronics Enclosure	A1	DIN Standard	F	Output 1
		A2	Field Mount IP 65		
		A3	Flameproof (CMRI IIA IIB Certified)		
B	Input Power Supply	B1	90 to 250V AC	G	Relay or Alarm Output
		B2	24V DC		
C	Input 1	C1	4 to 20mA		
		C2	1 to 5V		
D	Input 2	D1	4 to 20mA	H	Transmitter Power Supply
		DX	NA		
E	Input 3	E1	4 to 20 mA	I	Communication Output 1
		E2	RTD		
		EX	NA		

Note :

- Due to our continuous product revisions, design specification and model numbers are subject to change without notice.
- Accuracy defined at Lab Conditions.
- For other requirement please consult factory.
- This product is meant for laboratory/Process application only and not for custody transfer application.

ELECTRONET EQUIPMENTS PVT. LTD.

Registered Office:

Plot No. 84, 85, 86, Tiny Industrial Estate,
Kondhwa Budruk,
Pune-411 048, Maharashtra, India.

Factory Address:

Plot No. 8, (SEZ) Phase 1, Kesurdi MIDC,
Khandala, Dist.- Satara
Pin: 412 801, Maharashtra, India.



+91-20-26931476
+ 91 99229 31722
+ 91 99224 42183



ho@electronet.co.in
enquiries@electronet.co.in



www.eeplindia.com