

FL 204

FOUR WIRE TURBINE FLOW METER WITH LCD DISPLAY



Features

- 4 wire system
- Simple & Cost Effective Construction
- Suitable for Conductive and Non-Conductive Liquids
- LED Display
- Batch / High / Low Relay contact output
- Easy Maintenance
- Electronics Protection Class : Weatherproof IP 67 & Flameproof (CMRI IIA IIB Certified)



Description

Electronet series FL-204 are 4 wire turbine flow transmitters specially used for various industrial applications. The flowing media engages a vaned rotor causing it to rotate at an angular velocity proportional to flow rate. The pick-up coil senses the spinning motion of the rotor inside the pipe & converts it into a pulsating electrical signal. Summation of the pulsating electrical signal is directly related to the total flow. The frequency is linearly proportional to flow rate which is converted to electrical signal 4 - 20 mA.

Technical Specifications

Performance Characteristics	
Media	Liquids
Line Size	15 NB to 200 NB
Electronics	Integral / Remote
Viscosity	100 cp max
Display	LED Display : 4 Digit for Flow Rate & 8 Digit for Totalised Flow
Pick off Type	Magnetic Sensor
Remote Electronics Cable	15 Meters Max.
Type of Output	1) 4 to 20 mA DC 2) Pulse (Open collector)
Calibration Range	As per requirement (Factory Calibrated)
Accuracy*	$< \pm 0.5\%$ of F. S. $\pm 5\text{mm/sec}$ for Velocity Range 0.3 m/s to 6 or 12 m/s
Linearity	$\pm 0.5\%$ of F. S.
Repeatability	$\pm 0.5\%$ of F. S.
Temperature Coefficient	$\pm 0.01\%$ Per $^{\circ}\text{C}$
Pressure Drop	Approx. 0.28 kg/cm ² @ max. Flow
Turn Down Ratio	10 : 1
Process Temperature	-20 to 120 $^{\circ}\text{C}$ max.
Process Pressure	0 to 10 kg/cm ² max
Material of construction	1) Bearings - Tungsten Carbide Sleeve / V Jewel
	2) Rotor - SS410 / 17.4 PH
	3) Shaft - Tungsten Carbide
	4) Body / Support / Flange - SS
Power Supply	24 V DC ($\pm 10\%$)

Technical Specifications

Power Consumption	< 1 VA
Electrical Connection	1) M20 *1.5 F 2) 1/2 Inch NPT F 3) Pluggable Connector
Response Time	< 100 mSec
Electronic Protection Class	Field Mount Weather Proof IP-67 Flameproof (CMRI IIA IIB Certified)
Process Connections	1) ASA 150 RF, flanged as per table B 16.5 (15 to 200 NB) 2) Threaded (15 to 50 NB) 3) SS Tri-Clover (15 to 100 NB) 4) SMS Union (25 to 100 NB)
Mounting	In-Line Horizontal / Vertical
Ambient Conditions	Temperature -20 to 120°C / Humidity 5 to 95% non condensing
Alarm or Relay Output	1 Relay Output, 2 Relay Outputs (Max. 2 Alarms or 2 Relays)
Certification	CE

Assembly Overview

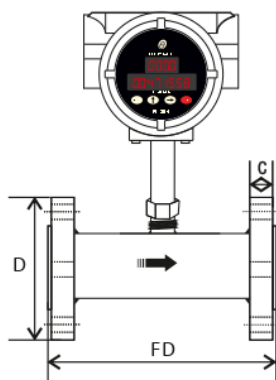


Fig. 1 Front View

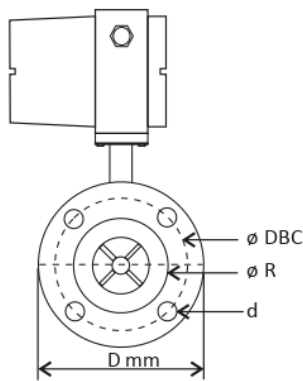


Fig. 2 Side View

Line Size		Flange To Flange Distance	Flow Range (m ³ /Hr)			
Inch	NB		Velocity 0.3m/s	Velocity 2.5m/s	Velocity 6m/s	Velocity 10m/s
½"	15	200	0.19	1.59	3.81	6.36
¾"	20	200	0.34	2.83	6.785	11.31
1"	25	200	0.53	4.42	10.602	17.67
1¼"	32	200	0.87	7.24	17.371	28.95
1½"	40	200	1.36	11.31	27.143	45.24
2"	50	200	2.12	17.67	42.4115	70.69
2½"	65	200	3.58	29.86	71.675	119.46
3"	80	200	5.43	45.24	108.573	180.96
4"	100	250	8.48	70.69	169.646	282.74
5"	125	250	13.25	110.45	265.071	441.79
6"	150	300	19.09	159.04	381.703	636.17
8"	200	350	33.93	282.74	678.584	1130.97

Note : Flange to flange distance (FD) Tolerance : 1) 1/2"(50NB) to 6"(150NB) : +/-3mm 2) 8"(200NB) : +/-5mm

- All dimensions are in 'mm'
- For dimensions of line size above 200NB, please consult factory.
- Typical mounting dimensions are for reference only.

- Wet Calibrated at IEC/ISO/EN17025 Accredited Calibration Rig.
- Flow meter should be selected with the help of Nomograph (recommended full scale velocity).

Ordering Information for Transmitter

Sample Order Code : FL 204-TX-A1-B1-C1-D1-E1-F1

Parameter	Code	Description	Parameter	Code	Description
A	Electronics Transmitter	A1	Weather Proof IP-67	D	Output 1
		A2	Flameproof (CMRI IIA IIB Certified)		D1
B	MOC Electronics Enclosure	B1	Aluminium Die Cast PU Painted		DX
		B2	SS316	E	Output 2
C	Electrical Connection Cable entry	C1	M20 *1.5 F		E1
		C2	1/2 Inch NPT F		EX
		C3	Pluggable Connector	F	Alarm or Relay Output
					F1
					F2
					FX

Note : In case of flameproof version only electronics enclosure is flameproof certified.

Ordering Information for Flow Tube

Sample Order Code : FL 204-FT15-N1-O1-P1-Q1-R1-S1-T1-U1-V1

Parameter		Code	Description	Code	Description
FT	Flow Tube	FT 15	15 NB	FT 65	65 NB
		FT 20	20 NB	FT 80	80 NB
		FT 25	25 NB	FT 100	100 NB
		FT 32	32 NB	FT 125	125 NB
		FT 40	40 NB	FT 150	150 NB
		FT 50	50 NB	FT 200	200 NB
N	MOC of Flange	N1	MS		
		N2	SS-304		
		N3	SS-316		
		NX	NA		
O	Electronics Location	O1	Integral (Local)		
		O2	Remote		
P	Remote Cable Length	P1	5 Meter		
		P2	10 Meter		
		P3	15 Meter		
		PX	NA		
Q	Flow Tube Protection Class	Q1	IP-67 (In Case of Integral)		
		Q2	IP-68 (In Case of Remote)		
R	Process Connection	R1	Threaded (15 to 50 NB)		
		R2	Flanged (15 To 200 NB)		
		R3	Triclover (15 to 100 NB)		
		R4	SMS Union (25 to 100 NB)		
		RY	Other		

Parameter		Code	Description
S	Material of construction Flow Tube	S1	SS-304
		S2	SS-316
		SY	Other
T	Flange Standard and Rating	T1	ANSI 150 B16.5
		T2	ANSI 300 B16.5
		T3	ANSI 600 B 16.5
		T4	DIN PN 10 EN 1092-1
		T5	DIN PN 16 EN 1092-1
		T6	DIN PN 25 EN 1092-1
		T7	DIN PN 40 EN 1092-1
		TY	Other
U	MOC Rotor	TX	NA
		U1	SS410
		U2	17.4 PH
V	Bearings Type	UY	Other
		V1	Tungsten Carbide Sleeve Bearing
		V2	V Jewel Bearing
		VY	Other

Note :

- Due to our continuous product revisions, design specification & model numbers are subject to change without notice.
- To be used for industrial applications.
- Accuracy defined at Lab Conditions.
- For other requirement please consult factory.
- This product is meant for laboratory/Process application only & not for custody transfer application.

ELECTRONET EQUIPMENTS PVT. LTD.

Registered Office:

Plot No. 84, 85, 86, Tiny Industrial Estate,
Kondhwa Budruk,
Pune-411 048, Maharashtra, India.

Factory Address:

Plot No. 8, (SEZ) Phase 1, Kesurdi MIDC,
Khandala, Dist.- Satara
Pin: 412 801, Maharashtra, India.



+91-20-26931476
+ 91 99229 31722
+ 91 99224 42183



ho@electronet.co.in
enquiries@electronet.co.in



www.eeplindia.com