

TS2000-UFM

ULTRASONIC FLOW METER - SWITCH

Features

- Ultrasonic Measurement using Transit Time Technology
- Full Bore Type
- Empty pipe indication
- Backlit LCD display
- Durable SS-316 Enclosure offering superior
- IP-68 Protection for reliable operation in harsh and wet environments



Technical Specifications

Performance Characteristics	
Measuring principle	Ultrasonic flow measurement
Media	Liquid
Line Size	15 NB to 300 NB
Number Of Paths	Single
Electronics	1) Integral (Local) 2) Remote
Remote Cable Length	5 mtr.
Output 1	4 to 20 mA
Output 2	Pulse - Open Collector Type (Optional)
Alarm or Relay Output	1 Relay Output (Optional)
Communication Output	RS-485 MODBUS RTU (Optional)
Viscosity	200 cP maximum
Display	Backlight LCD - 6 Digit for Flow Rate, 8 Digit for Flow Totalizer
Accuracy	< ± 0.5% of M.V. for Velocity Range 0.3 m/s to 6 or 12 m/s
Linearity	± 0.5% of M.V.
Repeatability	± 0.2% of M.V.
Temperature Coefficient	± 0.05% per °C
Process Temperature	200°C max
Process pressure	16 kg/cm ² max
Material of Construction	Flow tube: SS-316
	Electronics Enclosure: SS-316
	Sensor: SS-316 / PVC
Power Supply	24V DC
Response Time	1 Sec
Electronic Protection	Weather Proof IP-68
Sensor/Flow Tube Protection	Weather Proof IP-68
Process Connections	ASA 150 Flanged (As per table)
Electrical Connection	M12 Connector
Ambient Temperature	20°C to 75°C
Ambient Humidity	5 to 95% non-condensing

TS2000-UFM

ULTRASONIC FLOW METER - SWITCH



Assembly Overview

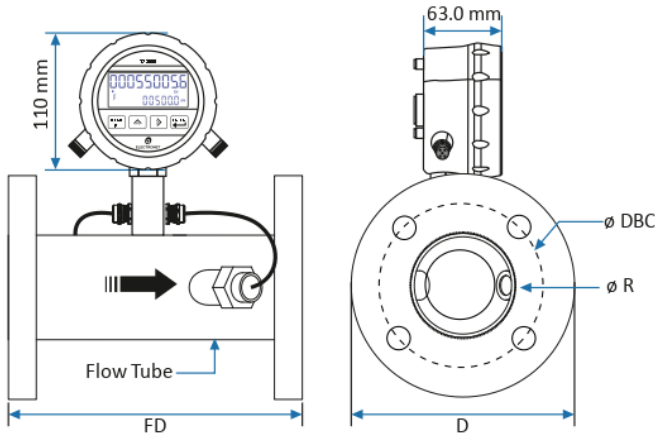


Fig. 1 Front View

Fig. 2 Side View

Connection Details

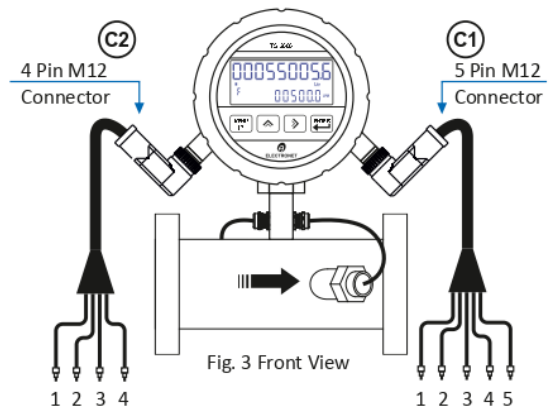


Fig. 3 Front View

C2: Details

- 1 : (POLE) Alarm Output
- 2 : (NO) Alarm Output
- 3 : (RX) RS485
- 4 : (TX) RS485

C1: Details

- 1 : +24V DC
- 2 : I+ Analog Output 4 to 20mA
- 3 : 0V DC / I- Analog Output 4 to 20mA
- 4 : Pulse Output (Open Collector)
- 5 : 0V DC / Pulse Output -Ve

TABLE : Dimensional Details Of Flange, as Per ANSI 150 # B-16.5

Refer Fig.1 & 2

Line Size	Inch	NB	Flange To Flange Distance	Flow Range (m ³ /Hr)			
				Velocity 0.3m/s	Velocity 2.5m/s	Velocity 6m/s	Velocity 10m/s
½"	15	200	200	0.19	1.59	3.81	6.36
¾"	20	200	200	0.34	2.83	6.785	11.31
1"	25	200	200	0.53	4.42	10.602	17.67
1¼"	32	200	200	0.87	7.24	17.371	28.95
1½"	40	200	200	1.36	11.31	27.143	45.24
2"	50	200	200	2.12	17.67	42.4115	70.69
2½"	65	200	200	3.58	29.86	71.675	119.46
3"	80	200	200	5.43	45.24	108.573	180.96
4"	100	250	250	8.48	70.69	169.646	282.74
5"	125	250	250	13.25	110.45	265.071	441.79
6"	150	300	300	19.09	159.04	381.703	636.17
8"	200	350	350	33.93	282.74	678.584	1130.97
10"	250	450	450	53.01	441.79	1060.28	1767.15
12"	300	500	500	76.34	636.17	1526.81	2544.69

Note : Flange to flange distance (FD) Tolerance : 1) 1/2"(15NB) to 6"(150NB) : +/-3mm 2) 8"(200NB) to 12"(300NB) : +/-5mm

- All dimensions are in 'mm'
- For dimensions of line size above 300NB, please consult factory.
- Typical mounting dimensions are for reference only.

- Wet Calibrated at IEC/ISO/EN17025 Accredited Calibration Rig.
- Flow meter should be selected with the help of Nomograph (recommended full scale velocity).

TS2000-UFM

ULTRASONIC FLOW METER - SWITCH



Ordering Information for Flow Transmitter

Sample Order Code : TS 2000 TX-A1-B1-C1

Parameter	Code	Description	Parameter	Code	Description
A	A1	1 Relay Output	C	C1	Pulse (Open Collector)
	AX	NA		CX	NA
B	B1	RS485 (MODBUS RTU)			
	BX	NA			

Ordering Information for Flow Tube

Sample Order Code : TS 2000-FT15-N1-O1-P1

Parameter		Code	Description	Code	Description
FT	Flow Tube	FT 15	15 NB	FT 100	100 NB
		FT 25	25 NB	FT 125	125 NB
		FT 32	32 NB	FT 150	150 NB
		FT 40	40 NB	FT 200	200 NB
		FT 50	50 NB	FT 250	250 NB
		FT 65	65 NB	FT 300	300 NB
		FT 80	80 NB		
Note : ▪ Due to our continuous product revisions, design specification & model numbers are subject to change without notice. ▪ Accuracy defined at Lab Conditions. ▪ For other requirement please consult factory. ▪ This product is meant for laboratory/Process application only and not for custody transfer application.					

Parameter		Code	Description
N	Insertion Flow Sensor Installation	N1	Fixed Inline
		N2	Hot Retractable
O	Process Connection	O1	Threaded (15NB to 50NB)
		O2	Flanged (15NB to 300NB)
P	Flange MOC	P1	MS
		P2	CS
		P3	SS-304
		P4	SS-316
		PX	NA

ELECTRONET EQUIPMENTS PVT. LTD.

Registered Office:

Plot No. 84, 85, 86, Tiny Industrial Estate,
Kondhwa Budruk,
Pune-411 048, Maharashtra, India.

Factory Address:

Plot No. 8, (SEZ) Phase 1, Kesurdi MIDC,
Khandala, Dist.- Satara
Pin: 412 801, Maharashtra, India.



+91-20-26931476
+ 91 99229 31722
+ 91 99224 42183



ho@electronet.co.in
enquiries@electronet.co.in



www.eeplindia.com