

Designed & Developed by Shri Baljit Impex

**SHRI BALJIT IMPEX**



**SHRI BALJIT IMPEX**

Our Domains: -

1. [www.shribaljitimpex.in](http://www.shribaljitimpex.in)
2. [www.shribaljit.com](http://www.shribaljit.com)
3. [www.shribaljitimpex.co.in](http://www.shribaljitimpex.co.in)
4. [www.shribaljitimpex.com](http://www.shribaljitimpex.com)

Company'S Core Activity

1. Importer 97%
2. Manufacturer 2.9%
3. Exporter 0.1%

## About Us

Welcome to Shri Baljit Impex

**Premier Construction Machinery Manufacturer & Supplier**

Since 2011, Shri Baljit Impex has been a trusted manufacturer, supplier, and importer of high-quality construction machinery in India. "The company was established under the leadership of Sohan Pal Panwar along with remarkable guidance of Akash Panwar and has been growing steadily since its inception." We deliver efficient, durable, and reliable machinery for builders, contractors, and infrastructure companies across India and Nepal.





## RIDE ON POWER TROWEL

1. MODEL - CRT-36H-H690 (LOW RIDER)
2. ENGINE TYPE - HONDA ENGINE GX690
3. NET POWER OUTPUT - 22.1 HP
4. PAN DIAMETER - 1000MM
5. PAN THICKNESS - 3 MM
6. ROTATION SPEED - 180R/MIN
7. DISPLACEMENT - 688 CC
8. WEIGHT - 450KG
9. DIMENSION - 1980x1020x1500

MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi,  
Pin: 110042



### RIDE ON POWER TROWEL

Model	CRT-36A-H690
Engine Type	Honda GX690
Oil Tank	15 L
Pan Diameter	980mm
Pan Thickness	2.5 mm
Rotation Speed	180r/min
Blade Quantity	8Pcs
Blade Size	350x150x2mm
Weight	425 KG
Dimension	2050x1100x1080mm

MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur,

Near Barat Ghar, New Delhi, North West Delhi,

Pin: 110042



## RIDE ON POWER TROWEL

Model	CRT-36-H-L2V78/H690
Engine Type	Lifan Engine L2V78/Honda Engine GX690
Net Power Output	16.5KW/22.1HP
Pan Diameter	980x2mm
Pan Thickness	3mm
Rotation Speed	180r/min
Displacement	688CC
Weight	445Kg
Dimension	1980x1020x1500



**Dynamic**

**Dynamic**



### DYNAMIC CONCRETE LASER SCREED LS325

1. MODEL - LS325 Honda EC2500x (2.6Kw, Single Cylinder Four Stroke)
2. LASER System - LEICA (Switzerland)
3. Laser Receiver - LEICA (Switzerland) of dead zones +2.5mm
4. Control System - AC SERVO System
5. Driving System - Phase (Italian)
6. Airframe Adjustment - Level Sensor Automatic Adjusting System
7. Slope Working - Single Slope Automatic Adjustment
8. Wheel Type - 733nm ATV (1.8-2.28AR)/3.0-21 Narrow Tyre
9. Vibrating System - Eccentric Vibration Motor, 300Hz
10. Centrifugal Force - 100 Kgs
11. Vibrating Plate - Aluminium Alloy
12. Scraper Blade - Aluminium Alloy
13. Scraper Adjustment - Computer Control, Automatic Adjustment
14. Working Length - 2.6M
15. Reverse Speed - 2.5Km/h
16. Min. Ground Clearance - 355mm
17. Ground Flatness - <2mm
18. Ground Elevators Error - +7mm/100m
19. Max Working Radius - <200mm
20. Working Hour - 200m<sup>2</sup>/h - 350m<sup>3</sup>/h
21. Weight - 230Kgs

**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi,  
Pin: 110042**



## DYNAMIC CONCRETE LASER SCREED WS25-2

1. MODEL - WS25-2
2. MODE - SAWAFUJI HONDA SH3900EX/YT3600DC HONDA
3. TYPE - ELECTRIC 220V-50Hz
4. POWER - 3/3.3KW
5. LUBRICATION OIL LEVEL - 0.6-0.8L
6. FUEL TANK VOLUME - 18/15L
7. WORKING MODE OF SCREED HEAD - ROCKING TYPE
8. SCREED WIDTH - 2500MM
9. PAVING MODE - VIBRATING PLATE SPREADING
10. PAVING THICKNESS - 50-200MM
11. VIBRATION FREQUENCY - 50Hz
12. CONTROL MODE OF LASER SYSTEM - MICROCOMPUTER LASER
13. CONTROL EFFECT OF LASER SYSTEM - FLAT SURFACE
14. DRIVE TYPE - REDUCER MOTOR
15. WHEEL - SOLID PUNCTURE PROOF TYRE/SPECIAL USE
16. SPEED - 0-40M/MIN
17. FORWARD BACK AWAY - MANUAL
18. NET WEIGHT - 430KG

**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi,  
Pin: 110042**



### DYNAMIC CONCRETE LASER SCREED YZ28-4S

1. MODEL - YZ28-4S
2. ENGINE MODEL - HONDA GX690
3. POWER - 18.4KW / 25HP
4. FUEL - GASOLINE (PETROL)
5. FUEL TANK CAPACITY - 20L
6. TYRE - SOLID NON - SLIP TYRES (WITH INFLATABLE WIDE TYRES)
7. LEVELING WIDTH - 2.5M / 8.20 FT
8. VIBRATOR SYSTEM - ELECTRIC MOTOR
9. PAVING MODE - HYDRAULIC SPIRAL CONVEYOR PAVING
10. EXCITING FORCE - 2000N
11. NET WEIGHT - 800KG
12. PAVING THICKNESS - 5-35CM
13. WALKING SPEED - 0-4.5KM/H
14. LASER SYSTEM - CONFIGURATION - LASEREMITTER & RECEIVER, TRIPOD  
LASER SYSTEM - LASER LEICA  
LASER CONTROL - MICROCOMPUTER AUTOMATIC LEVELING  
APPLICABLE SCOPE - FLAT SURFACE, SLOPE, 3D
15. DRIVING SYSTEM - HYDRAULIC

**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi,  
Pin: 110042**



### DYNAMIC CONCRETE LASER SCREED WS550

1. MODEL - WS550
2. ENGINE MODEL - HONDA GX690
3. POWER - 18.4KW / 25HP
4. FUEL - GASOLINE (PETROL)
5. FUEL TANK CAPACITY - 20L
6. TYRE - SOLID NON - SLIP TYRES (WITH INFLATABLE WIDE TYRES)
7. LEVELING WIDTH - 2.5M / 8.20 FT
8. VIBRATOR SYSTEM - ELECTRIC MOTOR
9. PAVING MODE - HYDRAULIC SPIRAL CONVEYOR PAVING
10. EXCITING FORCE - 2000N
11. NET WEIGHT - 800KG
12. PAVING THICKNESS - 5-35CM
13. WALKING SPEED - 0-4.5KM/H
14. LASER SYSTEM - CONFIGURATION - LASEREMITTER & RECEIVER, TRIPOD  
LASER SYSTEM - LASER LEICA  
LASER CONTROL - MICROCOMPUTER AUTOMATIC LEVELING  
APPLICABLE SCOPE - FLAT SURFACE, SLOPE, 3D
15. DRIVING SYSTEM - HYDRAULIC

**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi,  
Pin: 110042**





## DYNAMIC CONCRETE LASER SCREED WS940

1. MODEL - WS940
2. ENGINE MODEL - HONDA GX690
3. POWER - 18.4KW / 25HP
4. FUEL - GASOLINE (PETROL)
5. FUEL TANK CAPACITY - 20L
6. TYRE - SOLID NON - SLIP TYRES (WITH INFLATABLE WIDE TYRES)
7. LEVELING WIDTH - 2.5M / 8.20 FT
8. VIBRATOR SYSTEM - ELECTRIC MOTOR
9. PAVING MODE - HYDRAULIC SPIRAL CONVEYOR PAVING
10. EXCITING FORCE - 2000N
11. NET WEIGHT - 800KG
12. PAVING THICKNESS - 5-35CM
13. WALKING SPEED - 0-4.5KM/H
14. LASER SYSTEM - CONFIGURATION - LASEREMITTER & RECEIVER, TRIPOD  
LASER SYSTEM - LASER LEICA  
LASER CONTROL - MICROCOMPUTER AUTOMATIC LEVELING  
APPLICABLE SCOPE - FLAT SURFACE, SLOPE, 3D
15. DRIVING SYSTEM - HYDRAULIC

**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi,  
Pin: 110042**

### BULL FLOAT

#### Technical Specification

Model No.	Mx120
Material	Magnesium
Blade Size	4x8
Blade Length	47Inch
Blade Width	8Inch
Handle	2mx3Pcs

### ELECTRIC BULL FLOAT

#### Technical Specification

Model No.	MX120A
Material	Magnesium
Blade Size	120x20 mm
Blade Thickness	5mm
Handle	2mx3Pcs

### TEXTURE BRUSH

#### Technical Specification

Model No.	MXB-100A
Material	Magnesium
Connector	Turbine Connector
Brush Length	1000mm
Blade Dimension	1000x200mm
Handle Length	1.8mx3Pcs



### BUMP CUTTER

#### TECHNICAL SPECIFICATION



Model No.	MXB-300A
Blade Dimension	300x76x44 mm
Connector	Turbine Connector
Package Size	3000x210x65 mm
Handle Length	1.8mX3Pcs

MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: sales.shribaljitimpex@gmail.com

WEBSITE: www.shribaljitimpex.in

Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur,

Near Barat Ghar, New Delhi, North West Delhi,

Pin: 110042

### POWER TROWEL

### DMR600 EDGER TYPE TECHNICAL SPECIFICATION



**DMR900**  
TECHNICAL SPECIFICATION

Model	DMR600 EDGER TYPE
Pan Diameter	580mm
Pan Thickness	2.0mm
Working Width	600mm
Blade Quantity	4 Pcs
Blade Thickness	1.6mm
Blade Size	180*125mm
Speed-80	80-120rpm
Weight	80Kg
Dimensions	670x670x350mm
Available Variants	Electric Motor 3hp/ Honda Engine GX160

Model	DMR900
Pan Diameter	880mm
Pan Thickness	2.0mm
Working Width	900mm
Blade Quantity	4Pcs
Blade Thickness	1.6mm
Blade Size	320x150mm
Speed	80-120rpm
Weight	80Kg
Dimensions	1040x1040x350mm
Available Variants	Electric Motor 3hp/ Honda Engine GX160



**DMR1000**  
TECHNICAL SPECIFICATION



Model	DMR1000
Pan Diameter	980mm
Pan Thickness	2.0mm
Working Width	1000mm
Blade Quantity	4 Pcs
Blade Thickness	1.6mm
Blade Size	350x150mm
Speed	80-120rpm
Weight	90Kg
Dimensions	1040x1040x350mm
Available Variants	Electric Motor 3hp/ Honda Engine GX160

### CONCRETE CUTTER – HQR500 TECHNICAL SPECIFICATION



Model	Q500
Maximum Diameter of Saw	20" / 500mm
Maximum Cutting Depth	7.5" / 190mm
Tank	Plastic
Water Tank	30L
Applicable Power	5hp – 10hp
Wheel Size	350mm
Net Weight	70Kgs
Dimensions	950x600x1080mm
Available Variants	Electric Motor/ Diesel/ Petrol Engine

### CONCRETE CUTTER – HQR500 TECHNICAL SPECIFICATION

Model	Q500A
Maximum Diameter of saw	20" / 500mm
Maximum Cutting Depth	7.5" / 190mm
Tank	Metal
Water Tank	30L
Applicable Power	5hp – 10hp
Wheel Size	350mm
Net Weight	60Kgs
Dimensions	950x600x1080mm
Available Variants	Electric Motor/ Diesel/ Petrol Engine



### SCARIFIER

#### TECHNICAL SPECIFICATION

Model No	PI250
Motor Power	7.5KW
Voltage	380/415V
Mining Width	250mm
Mining Depth	5-8mm
Blade No. (Pcs)	108Pcs
Weight	150Kg



MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi,  
Pin: 110042



### FLOOR GRINDING MACHINE

#### GT330

##### TECHNICAL SPECIFICATION



Model	TG330
Motor Power	4KW
Working Voltage	415V
Working Speed	720r/min
Abrasive Block Quantities	3 Plates 12 Blocks
Grinding Width	400mm
Dust Tank Capacity	24L
Weight	120Kg

#### GT630

##### TECHNICAL SPECIFICATION

Model	TG630
Motor Power	7.5KW
Working Voltage	380V
Working Speed	1800r/min
Abrasive Block Quantities	4 Plates 12 Blocks
Grinding Width	630mm
Dust Tank Capacity	40L
Weight	260Kg



MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur, Near Barat Ghar, New Delhi, North West Delhi, Pin: 110042

## BAR BENDING MACHINE

### TECHNICAL SPECIFICATION



Model No	GW42
Rebar Diameter	6-32mm
Bending Speed	20r/Min
Motor Power	3KW Brake Motor
Voltage	380/415V
Plate Diameter	365mm
Motor Speed	1440r/Min
Driving Mode	Gear Box
Table Thickness	12mm
Weight	335 KG
Dimension	850x750x900mm

### TECHNICAL SPECIFICATION

Model No	GW52
Rebar Diameter	6-40mm
Bending Speed	20r/Min
Motor Power	4KW Brake Motor
Voltage	380/415V
Plate Diameter	410mm
Motor Speed	1440r/Min
Driving Mode	Gear Box
Table Thickness	12mm
Weight	410 KG
Dimension	850x745x990mm



### BAR CUTTING MACHINE

#### TECHNICAL SPECIFICATION

MODEL	GQ52
Rebar Diameter	6-40mm
Cutting Speed	32Times/Min
Motor Power	4KW/5.3hp
Input Voltage	380V/415V
Motor Speed	2800rpm
Blade Size	83x83x25mm
Weight	525 KG
Dimension	1560x505x820mm



#### TECHNICAL SPECIFICATION

MODEL	GQ50
Rebar Diameter	6-36mm
Cutting Speed	32Times/Min
Motor Power	4KW/5.3hp
Input Voltage	380V/415V
Motor Speed	2800rpm
Blade Size	83x83x25mm
Weight	470 KG
Dimension	1420x480x810mm



#### TECHNICAL SPECIFICATION

MODEL	GQ40
Rebar Diameter	6-32mm
Cutting Speed	32Times/Min
Motor Power	3KW/4.02hp
Input Voltage	380V/415V
Motor Speed	2800rpm
Blade Size	83x83x25mm
Weight	380 KG
Dimension	1420x440x835mm



#### TECHNICAL SPECIFICATION

MODEL	GQ45A
Rebar Diameter	6-32mm
Cutting Speed	28Times/Min
Motor Power	3KW/4.02hp
Input Voltage	380V/415V
Motor Speed	2800rpm
Blade Size	83x83x25mm
Weight	340 KG
Dimension	1325x440x835mm



MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur, Near Barat Ghar, New Delhi, North West Delhi, Pin: 110042



### SCREED VIBRATOR WITH HONDA ENGINE TECHNICAL SPECIFICATION

Model	MX-300
Screed Width	3m
Engine	Honda Engine GX35
Power	1.1KW/1.6hp
Speed	5200r/min
Vibration Force	1.8KN
Fuel Tank Capacity	0.65L
Weight	22 KG
Dimension	740x410x410mm

### SCREED VIBRATOR WITH ELECTRIC MOTOR TECHNICAL SPECIFICATION

Model	EMX300A
Screed Width	2m / 3m / 4m
Voltage	220V
Power	200W
Frequency	50Hz
Speed	2960r/min
Vibration Force	1.8KN
Exciting Force	2.2KN





### REVERSIBLE COMPACTOR- RC160 TECHNICAL SPECIFICATION

Model	RC160
Working Direction	Forward and Reverse
Applicable Power	5HP
Centrifugal Force	30KN
Max Speed	3600rpm
Walking Speed	20-23m/min
Compaction Depth	30cm
Plate	Steel Plate
Plate Thickness	8mm
Plate Size	650x370mm
Net Weight	115 KG
Dimension	900x550x1100
Available Variants	Electric Motor/Petrol Engine/Greaves Engine



### PLATE COMPACTOR C90T TECHNICAL SPECIFICATION



Model	C90T
Working Direction	Forward Type
Applicable Power	5HP
Centrifugal Force	15KN
Max Speed	3600rpm
Walking Speed	20-23m/min
Compaction Depth	30cm
Plate	Steel Plate
Plate Thickness	8mm
Plate Size	470mmx550mm
Net Weight	90 KG
Dimension	900x550x640mm
Available Variants	Electric Motor/Petrol Engine/Greaves Engine

**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: sales.shribaljitimpex@gmail.com**

**WEBSITE: www.shribaljitimpex.in**

**Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,**

**Near Barat Ghar, New Delhi, North West Delhi**

**Pin: 110042**

### MINI CRANE WITH WINCH

#### TECHNICAL SPECIFICATION



Load Capacity	200 KG
Wire Rope Length	30m
Wire Diameter	7mm
Motor Power	2.5KW/3.3HP
Voltage	220V/440V
Hoisting Speed	15m/min
Frame Weight	60 KG

### WINCH

#### TECHNICAL SPECIFICATION

Load Capacity	200 KG
Wire Rope length	30m
Wire Diameter	7mm
Motor Power	2.5KW/3.3HP
Voltage	220V/440V
Hoisting Speed	15m/min
Weight	40 KG



MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur,

Near Barat Ghar, New Delhi, North West Delhi

Pin: 110042

### TAMPING RAMMER MACHINE

#### HONDA ENGINE



#### TECHNICAL SPECIFICATION

Model	RM80
Impact Frequency	700Times/Min
Walking Speed	9-12m/min
Plate Size	300x280mm
Engine	Honda Engine GX160
Power	4HP/2.9KW
Impacting Force	15KN
Weight	90 KG
Package Size	900x480x580mm

#### TECHNICAL SPECIFICATION

Model	HCD110-1P
Impact Frequency	700Times/Min
Walking Speed	9-12m/min
Plate Size	300x280mm
Motor	Electric Motor
Motor Power	3KW-220V
Motor Speed	2800rpm
Impacting Force	15KN
Weight	80 KG
Package Size	900x480x580mm

#### ELECTRIC MOTOR 1PHASE



#### TECHNICAL SPECIFICATION

Model	HCD110-3P
Impact Frequency	700Times/Min
Walking Speed	9-12m/min
Plate Size	300x280mm
Motor	Electric Motor 3 Phase
Motor Power	3KW-380V
Motor Speed	2800rpm
Impacting Force	15KN
Weight	80 KG
Package Size	900x480x580mm

#### ELECTRIC MOTOR 3PHASE





### RING MAKING MACHINE GF20D-1P/3P TECHICAL SPECIFICATION

Model No	GF20D
Weight	100 KG
Voltage	220V/415V
Bending Diameter	4-16mm
Bending Speed	1440r/min
Motor Power	2.2KW/3hp
Paddles	2 No's



### RING MAKING MACHINE – GF20-3P TECHNICAL SPECIFICATION

Model No	GF20
Weight	100 KG
Voltage	415V
Bending Diameter	4-16mm
Bending Speed	1440r/min
Motor Power	2.2KW/3hp
Paddles	2 No's



### REBAR DECOILING MACHINE GT4-10-1P/3P TECHNICAL SPECIFICATION

Model No	GT4-10 – 1P/3P
Round Bar	4-10mm
3 <sup>rd</sup> Class Bar	4-8mm
Straightening Wheel	50x57mm
Motor Power	7.5KW
Input Voltage	220V/380V
Motor Speed	1440rpm
Straightening Speed	38m/min
Dimension	1440x620x880mm
Net Weight	240 KG



MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi  
Pin: 110042





### SPIRAL BENDING MACHINE GWH-10 TECHNICAL SPECIFICATION

Model No	GWH-10
Rebar Diameter	6-10mm
Plate Diameter	360mm
Bending Speed	20r/min
Motor Power	3KW
Voltage	380V
Motor Speed	440r/min
Weight	187 KG

### SCRAP STRAIGHTENING MACHINE GX6-25 TECHNICAL SPECIFICATION

Model No	GX6-25
Motor Power	15 KW/20.1HP
Machine Diameter	6-25mm
Shortest Processing	300mm
Reducer Model	400
Feed Inlet	8
Weight	830 KG
Dimensions	1400x1000x1350mm



### SCRAP STRAIGHTENING MACHINE GX6-14 TECHNICAL SPECIFICATION

Model No	GX6-14
Machine Diameter	6-14mm
Reducer	250
Feed Inlet	5 Pcs
Working Speed	28m/min
Shortest Processing	300mm
Motor Power	5.5KW/7.3hp
Dimension	1200x750x1200mm
Net Weight	520 KG



### REBAR THREADING MACHINE CDRG-45 TECHNICAL SPECIFICATION




Model No	CDRG-45
Voltage	415V
Motor Power	5.5KW/7.37hp
Main Shaft Speed	62r/min
Threading Diameter	16-40mm
Thread Pitch	2.5-3mm
Weight	380KG
Max Working Length	80mm

### PUNCHING & SHEARING


#### QA32-8

##### TECHNICAL SPECIFICATION

Model	QA32-8
Shear Strength	360KN
Tool Travel	27mm
Stroke Times	30Times/Min
Motor Power	2.2KW
Weight	430Kg
Dimensions	900x500x1170mm

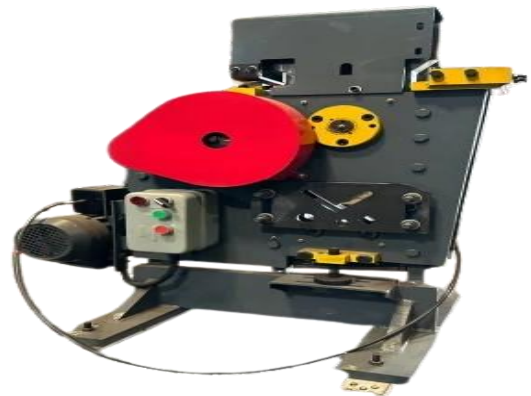

## SUSPENDED PLATFORM

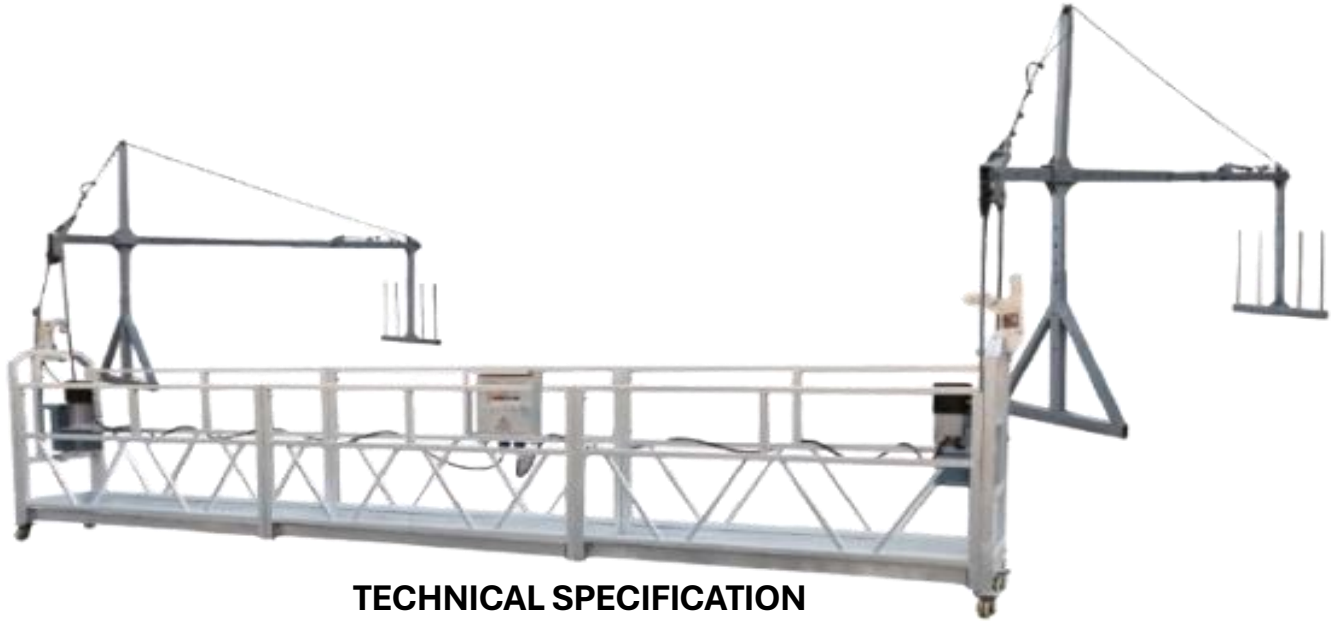

### TECHNICAL SPECIFICATION

Model	ZLP 800
Material Of Platform	M.S Steel Platform & Hot Dip Galvanized/Power Coated
Platform Size	2.5x2=5Mtr 1.5x1=1.5Mtr 1x1=1Mtr Total 7.5Mtr
Counter Weight	1000Kg Approx
Working Speed	9-11m/min
Power	1.8KWx2
Voltage	AC 415V – 3 Phase
Rated Lifting Force	8 KN
Rated Load	800 Kg
Structure Weight	900-950 Kg Approx
	WIRE ROPE
Quantity	4X31 SW – FC
Size	9.1mm
Length	100/130/150/200Mtr
	SUSPENDED MECHANISM
Height Adjustment	1.15m – 1.75m
Front Beam Extension	1.1m – 1.7m
	WORKER SAFETY FEATURES
Breaking	15 Nm
Safety Lock	Tilt Proof Safety Lock x 2
Safety Rope	Included
Feasibility/Optional	Anti Tilt Limit Switch
Cable Protection	Cable Snatch Protector Device

MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi  
Pin: 110042



### SPIRAL BENDING MACHINE GWH-32 TECHNICAL SPECIFICATION

Model No	GWH-32
Rebar Diameter	16-28mm
Wheel Diameter	160mm
Curving Speed	5-10r/min
Motor Power	3KW
Voltage	380V
Motor Speed	1440r/min
Weight	260Kg
Ring Diameter	16mm: 500mm <sup>+</sup> 18mm: 700mm <sup>+</sup> 20mm: 800mm <sup>+</sup> 22mm: 900mm <sup>+</sup> 25mm: 1000mm <sup>+</sup> 28mm: 1200mm <sup>+</sup>



### CONCRETE ROLLER SCREED PAVER MACHINE TECHNICAL SPECIFICATION

MODEL	FFP219
Width	3mtr/5mtr/7mtr
Diameter of Roller	219m
No. of Needle Vibrator	3 to 7 Pcs
Quantity of Roller	2 Pcs
Quantity of Auger	1 Pcs
Vibration/Lifting Motor	3 hp
Traveling Motor	5 hp
Auger Motor	5 hp
Travel Speed	0-3 per min
Max Paving Thickness	300mm
Panel	Indian



**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi  
Pin: 110042**



### VIBRATING ROLLER



MODEL	FVR 600S	FVR 600	FVR 850
Package Size(mm)	1380x920x1100	1370x980x1200	2100x1000x1400
Centrifugal Force	15KN	30KN	30KN
Starting Way	Manual	Electric	Electric
Drive Model	Hydraulic	Hydraulic	Hydraulic
Water Tank	30Ltr	35Ltr	35Ltr
Working Model	Forward & Backward	Forward & Backward	Forward & Backward
Working Speed	0-4Km/Hour	0-4Km/Hour	0-5Km/Hour
Engine	5.5Hp Greaves/Honda	9Hp Greaves	9Hp Greaves
Vibration	70Hz	70Hz	70Hz
Frequency	Automatic	Automatic	Electrum
Vibrating Clutch Method			
Fuel Tank	2.5Ltr	3.6Ltr	3.6Ltr
Wheel Size(mm)	430x600	430x600	580x700
Weight (Kg)	280	550	750
Grade Ability	25%	30%	30%

MODEL	FVR 1000	FVR 1200
Package Size (mm)	2100x1000x1450	2100x1000x1650
Centrifugal Force	50KN	50KN
Starting Way	Electric	Electric
Drive Model	Mechanical	Hydraulic
Water Tank	60Ltr	60Ltr
Working Model	Forward & Backward	Forward & Backward
Working Speed	0-8Km/Hour	0-8Km/Hour
Engine	9Hp Cheng	13Hp Cheng
Vibration	70Hz	70Hz
Frequency	Electrum	Electrum
Vibrating Clutch Method		
Fuel Tank	5Ltr	5Ltr
Wheel Size (mm)	540x700	540x800
Weight (Kg)	1000	1200
Grade Ability	30%	30%



**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,**

**Near Barat Ghar, New Delhi, North West Delhi**

**Pin: 110042**

### MONKEY LIFT MACHINE



Model Number	CRANE 200 KG	CRANE 250 KG	CRANE 300 KG	CRANE 500 KG
Load Capacity	200Kg	250Kg	300Kg	500Kg
Lifting Height	30 Meter (100 Feet)	30 Meter (100 Feet)	40 Meter (120 Feet)	60 Meter (160 Feet)
Lifting Speed	15 Meter/Minute	15 Meter/Minute	20 Meter/Minute	22 Meter/Minute
Motor Power	4.0 Kw (China)	4.0 Kw (China)	5.0 HP (Crompton)	7.5 HP (Crompton)
Voltage	220 V	220 V	380 V	380 V
Prime Mover	Geared Motor	Geared Motor	Gear Box (1:30 Ratio)	Gear Box (1:30 Ratio)
Wire Rope	30 Meter, 7 mm	30 Meter, 7 mm	40 Meter, 10 mm	60 Meter, 10 mm
Boom Length	1600 mm	1100-1800 mm (Adj)	1900 mm	3000 mm
Boom Height	2000 mm	1800 mm	2100 mm	2200 mm
Machine Weight	90 Kg	120 Kg	450 Kg	650 Kg



**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,**

**Near Barat Ghar, New Delhi, North West Delhi**

**Pin: 110042**



### CONCRETE CUTTER MACHINE



MODEL	CQF 20	CQF 28	CQF 40
Blade Size	12-20 Inch	16-28 Inch	20-40 Inch
Cutting Depth	160 mm	225 mm	400 mm
Engine Type	Honda/Greaves/ Electric Motor	Honda/Greaves/ Electric Motor	Electric Motor/ VST Shakti Engine
Power/HP	5/9 hp	9/13 hp	15/20/25 hp
Water Tank	35 L	30 L	40 L
Depth Adjustment	Handle Rotation	Handle Rotation	Handle Rotation
Weight	95 Kg	180 Kg	280 Kg



**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi  
Pin: 110042**

### PLATE COMPACTOR

#### TECHNICAL SPECIFICATION

Model No	SBI/PC 150E
Plate Size	L400 X W300
Max Speed	2880 RPM
Compaction Depth	300MM
Engine	Greaves (5.5 HP) Diesel
Max Output	4KW/5.5HP
Plate Thickness	12 MM
Speed	20-23 M/Min
Compaction	5 Ton
Weight	150 KG



#### TECHNICAL SPECIFICATION

Model No	SBI/PC 90M
Plate Size	L400 X W300
Compaction Depth	300MM
Electric Motor	Crompton
Max Output	2.2KW/3HP
Plate Thickness	10 MM
Power	Single/Three Phase
Compaction	3 Ton
Weight	90 KG



#### TECHNICAL SPECIFICATION

Model No	SBI/PC 140M
Plate Size	L685 - W482 mm
Max Speed	2800 RPM
Compaction Depth	300MM
Electric Motor	Crompton
Max Output	3.7KW/5HP
Plate Thickness	12 MM
Speed	20-23 M/Min
Power	Single Phase
Compaction	5 Ton
Weight	140 KG



#### TECHNICAL SPECIFICATION

Model No	SBI/PC 90E
Plate Size	L400 X W300
Compaction Depth	300MM
Engine	Honda GX160(5hp) Petrol
Max Output	3.7KW/5HP
Plate Thickness	10 MM
Compaction	3 Ton
Weight	95 KG



MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur,

Near Barat Ghar, New Delhi, North West Delhi

Pin: 110042



### INDIAN BENDING & CUTTING MACHINE

#### BAR CUTTING MACHINE TECHNICAL SPECIFICATION

Model No	SBI BCM 32
Cutting Range (mm)	6-32 TMT
Cutting Speed (Per Min)	30-35 Strokes
Speed	2880 RPM
Voltage	415V, 3Ph
Power (KW)	5 HP
Motor Make	Bharat Bijli
Weight	550 KG



#### BAR CUTTING MACHINE TECHNICAL SPECIFICATION

Model No	SBI BCM 40
Cutting Range (mm)	6-40 TMT
Cutting Speed (per min)	30-35 Strokes
Speed	2880 RPM
Voltage	415V, 3Ph
Power (KW)	7.5 HP
Motor Make	Bharat Bijli
Weight	650 KG



#### BAR BENDING MACHINE TECHNICAL SPECIFICATION

Model No	SBI BBM 32
Bending Range (mm)	6-32 MM
Power (KW)	5 HP Bharat Bijli
Phase	3 Phase
Voltage (V)	415V
Working Plate	50MM
Working Disc Dia	380MM
Speed (RPM)	1440 RPM
Weight	530 KG



#### BAR BENDING MACHINE TECHNICAL SPECIFICATION

Model No	SBI BBM 40
Bending Range (mm)	6-40 MM
Power (KW)	7.5 HP Bharat Bijli
Phase	3 Phase
Voltage (V)	415V
Working Plate	50MM
Working Disc Dia	380MM
Speed (RPM)	960 RPM
Weight	650 KG



MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5,  
Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur,  
Near Barat Ghar, New Delhi, North West Delhi  
Pin: 110042

### TRIMIX FLOORING SET

#### Vacuum Dewatering Pump TECHNICAL SPECIFICATION

Model No	SBI/VP-24
Max Dewatering Capacity	24 Sq. Meter
Power Rating	7.5 HP
Motor Make	Shri Baljit Impex
Electric Cable	10 METER



#### Filter Mat

Model	SBI/FT-4
Quantity	1 Set (4X1) Meter

#### Suction Pipe

Model No	SBI/SB-15
Length	15 Meter



#### Top Mat

Model No	SBI/SB-24
Standard Size	4.5X5 Meter

## Electric Panel Board Large

### TECHNICAL SPECIFICATION

Model	SBI/EPB-4
Current Rating	25 Ampere
MCB Brand	SIEMENS
Contactor	25 Amp (Havells/Schneider)



## Indian Power Trowel

### TECHNICAL SPECIFICATION



Model	PTF/40/2IN1
Handle Height	Adjustable
Blade Thickness	2 mm
No. of Blade	4 Nos
No. of Disc	1 Nos
Power Rating	5 HP Geared Motor
Motor Make	Crompton
Electric Cable	10 Meter

### ANTI SMOG GUN



MODEL	ASG70E
Industrial Axial Fan	LN6 Make Blades
Case For Axial Fan	3.00mm (MSEP)
Fan Blade	6/8 Nos
Fan Diameters	32 Inch
Cannon Size	34 Inches
Swing	Auto Swing
Swing Rotation Motor with	2 with Gear Box and two Limit Switch and Panel
Anti Smog Gun Range	70 To 100 Meters
Water Nozzle Quantity	32 Pcs
Droplet Size	30-50 Micron
Fan Motor Power	20 HP, 3 Phase
Speed (rpm)	2800 rpm
Fan Safe Guard	Back Side
Cannon	5mm and 2.5mm (SS 202)
Water Feed Pump	5 HP, 3450 rpm/6.3A, 415V/50Hz Jetting Pump
Water Flow	55-60 LPM
Water Pump Pressure	100 Bar
Water Tank	Without Tank
Water Misting Pipe	S.S 202-01 no
Electric Control Panel	To Operate Fan & Pump
Hose Pipe	To Connect with pressure/Booster Pump
Pump Type	Multistage Pump Jetting Pump
Anti Smog Gun	Mounted with Rake Arm
Elevation Angle	Smooth Vertex Handling up to 60°
Size (HxWxL)	2290x2080x2550 mm
Size Of Gun	2200 mm
Filter	Yes
Horizontal Rotator	To Rotate Anti Smog Horizontally – 180°

MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur,

Near Barat Ghar, New Delhi, North West Delhi

Pin: 110042





<b>MODEL</b>	<b>APG50E</b>
<b>Industrial Axial Fan</b>	<b>LN6 Make Blades</b>
<b>Case For Axial fan</b>	<b>3.00mm (MSEP)</b>
<b>Fan Blade with Safety Guard</b>	<b>6 Nos. 1 Pcs Safety Guard</b>
<b>Fan Diameters</b>	<b>28 Inch</b>
<b>Pump Pressure</b>	<b>5 To 8 Bar</b>
<b>Cannon Diameter</b>	<b>30 Inch Blower Size with High Volume &amp; High Pressure Fan</b>
<b>Blower Capacity</b>	<b>5000 M<sup>3</sup>/Hour or Above</b>
<b>Cannon Rotation Shaft Bearing Make</b>	<b>MBC Teper Boll Bearing &amp; UPC 206</b>
<b>Water Nozzle Quantity</b>	<b>23-24 Nos</b>
<b>Type Of Nozzle</b>	<b>Brass/SS Nozzle &amp; MS Ring</b>
<b>Cannon (Cone)</b>	<b>Solid Cone, Material MS</b>
<b>Automatic Vertical Movement</b>	<b>No. Only Manual Adjustable</b>
<b>Swing</b>	<b>Automatic Adjustable Horizontal Movement</b>
<b>Droplet Size</b>	<b>20-250 Micron</b>
<b>Capacity Of Anti Smog Gun (Range)</b>	<b>45-50 Meters</b>
<b>Fan Motor Power (KW)/Hp</b>	<b>10 Hp, 3 Phase</b>
<b>Speed (rpm)</b>	<b>2800 rpm</b>
<b>Fan Safe Guard Mesh</b>	<b>Back Side</b>
<b>Discharge Hose</b>	<b>19 mm</b>
<b>Dry Run Safety, Single Phase Preventer, Locking System fir Elevation &amp; Rotation &amp; Emergency, Other Safety</b>	<b>Yes</b>
<b>Limit Switch</b>	<b>2 No. For Automatic Fictional</b>
<b>Gear Box</b>	<b>2 Nos. For Auto Rotation</b>
<b>Auto Swing Motor Power</b>	<b>0.5 Hp</b>
<b>High Pressure Multistage Water Pump</b>	<b>3 HP, 1440 rpm [CRI/Lobi]</b>
<b>Water Flow</b>	<b>35-40 LPM</b>
<b>Heavy Duty Water Tank (Trolley)</b>	<b>1000 Ltrs, 1 Nos MS</b>
<b>Water Misting Pipe</b>	<b>S.S 202-01no</b>
<b>Electrical Control Panel</b>	<b>To Operate Fan &amp; Pump, TC</b>
<b>Hose Pipe</b>	<b>To Connect with Pressure /Booster Pump</b>
<b>Trolley For Anti Smog Gun</b>	<b>Mounted with 4 Wheels with Rake Arm</b>
<b>Hand Lever Operation</b>	<b>Smooth Vertex Handling up to 60°</b>
<b>Size (HxWxL)</b>	<b>2190x1780x2350 mm</b>
<b>Size Of Gun</b>	<b>1400 mm</b>
<b>Horizontal Rotator</b>	<b>To Rotate Anti Smog Horizontally-270°</b>
<b>Weight</b>	<b>550 Kg Approx</b>



<b>MODEL</b>	<b>APG30E</b>
<b>Cannon Swing</b>	<b>Manual</b>
<b>Capacity Of Anti Smog Gun Range</b>	<b>25-30 Meters</b>
<b>Industrial Axial Fan</b>	<b>LN6 Make Blade</b>
<b>Case For Axial Fan</b>	<b>3.00mm (MSEP)</b>
<b>Fan Blade</b>	<b>6 Nos</b>
<b>Fan Diameters</b>	<b>24 Inch</b>
<b>Cannon Material</b>	<b>Front SS 304 &amp; Back MS</b>
<b>Cannon Diameters</b>	<b>28 Inch</b>
<b>Water Nozzle Quantity</b>	<b>17-18 Nos</b>
<b>Type Of Nozzle</b>	<b>Brass</b>
<b>Droplet Size</b>	<b>0-30 Micron</b>
<b>Motor Power (KW)/Hp</b>	<b>5 Hp, 3 Phase</b>
<b>Speed (rpm)</b>	<b>2800 rpm</b>
<b>Fan Safe Guard</b>	<b>Back Side</b>
<b>Water Feed Pump [L&amp;T Boric CRI]</b>	<b>1.5 HP, 1440 rpm</b>
<b>Water Flow</b>	<b>16-20 LPM</b>
<b>Water Tank</b>	<b>1000 Ltr</b>
<b>Water Misting Pipe</b>	<b>S.S 202-01no</b>
<b>Electrical Control Panel</b>	<b>To Operate Fan &amp; Pump, /Schneider/eqv Fitting</b>
<b>Hose Pipe</b>	<b>To Connect with Pressure/Booster Pump</b>
<b>Trolley For Anti Smog Gun</b>	<b>Trolley, Mounted with 4 Wheel with Rake Arm</b>
<b>Hand Lever Operation</b>	<b>Smooth Vertex Handling up to 60°</b>
<b>Size (HxWxL)</b>	<b>7Ft x 2Ft x 3Ft</b>
<b>Size Of Gun</b>	<b>1400 mm</b>
<b>Horizontal Rotator Manual</b>	<b>To Rotate Anti Smog Horizontally – 320°</b>

**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,**

**Near Barat Ghar, New Delhi, North West Delhi**

**Pin: 110042**



<b>MODEL</b>	<b>APG50E</b>
<b>Cannon Swing</b>	<b>Manual</b>
<b>Capacity Of Anti Smog Gun Range</b>	<b>40-50 Meters (Throw Range +/- 10%)</b>
<b>Industrial Axial Fan</b>	<b>LN6 Make Blade (Aluminium)</b>
<b>Case For Axial Fan</b>	<b>3 mm (MSEP)</b>
<b>Fan Blade</b>	<b>6 Nos</b>
<b>Fan Diameters</b>	<b>28 Inch</b>
<b>Cannon Diameter</b>	<b>30 Inch Blower Size with High Volume &amp; High Pressure Fan</b>
<b>Blower Capacity</b>	<b>50000 m<sup>3</sup>/Hour or Above</b>
<b>Cannon Rotation Shaft Bearing Make</b>	<b>MBC Teper Boll Bearing &amp; UPC 206</b>
<b>Water Tank Paint Inner</b>	<b>Plastic Paint Black</b>
<b>Water Nozzle Quantity</b>	<b>23-24 Nos</b>
<b>Type Of Nozzle</b>	<b>Brass/SS</b>
<b>Droplet Size</b>	<b>30-50 Micron</b>
<b>Motor Power (KW)/Hp</b>	<b>10 Hp, 3 Phase (Crompton/Havells)</b>
<b>Speed (rpm)</b>	<b>2800 rpm</b>
<b>Fan Safe Guard</b>	<b>Back Side</b>
<b>Cannon Thickness</b>	<b>3-2.5 mm (Solid MS)</b>
<b>Water Feed Pump [L&amp;T Boric CRI]</b>	<b>3 HP, 1440 rpm Multistage Water Pump System</b>
<b>Pump Pressure</b>	<b>8 To 10 Bar</b>
<b>Water Flow</b>	<b>35-40 LPM</b>
<b>Water Tank</b>	<b>1000 Ltrs, 1 Nos</b>
<b>Water Misting Pipe</b>	<b>S.S 202-01no</b>
<b>Electric Control Panel</b>	<b>To Operate Fan &amp; Pump, HP/Chent/Tc/Lc</b>
<b>Hose Pipe</b>	<b>To Connect with Pressure/Booster Pump</b>
<b>Trolley For Anti Smog Gun</b>	<b>Trolley Mounted with 4 Wheels with Rake Arm</b>
<b>Hand Lever Operation</b>	<b>Smooth Vertex Handling up to 60°</b>
<b>Size (HxWxL)</b>	<b>2190x1780x2350 mm</b>
<b>Size Of Gun</b>	<b>1400 mm</b>
<b>Horizontal Rotator Manual</b>	<b>To Rotate Anti Smog Gun Horizontally- 320°</b>
<b>Total Weight</b>	<b>450-500 Kg</b>

**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5,**

**Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,**

**Near Barat Ghar, New Delhi, North West Delhi**

**Pin: 110042**





<b>MODEL</b>	<b>APG30E</b>
<b>Industrial Axial Fan</b>	<b>LN6 Make Blades (Aluminium Alloy)</b>
<b>Case For Axial Fan</b>	<b>3.00 mm (MSEP)</b>
<b>Fan Blade with Safety Guard</b>	<b>6 Nos 1 Pcs Safety Guard</b>
<b>Fan Diameters</b>	<b>24 Inch</b>
<b>Cannon Diameter</b>	<b>28 Inch Blower Size with High Volume &amp; High Pressure Fan</b>
<b>Water Nozzle Quantity</b>	<b>17-18 Nos SS Nozzle &amp; MS Ring</b>
<b>Cannon (Cone)</b>	<b>Solid Cone Material MS</b>
<b>Vertical Movement</b>	<b>Manual Adjustable 60°</b>
<b>Automatic Swing</b>	<b>Automatic 220° Adjustable Horizontal Movement</b>
<b>Droplet Size</b>	<b>0-20u Micron</b>
<b>Capacity Of Anti Smog Gun Range</b>	<b>25-30 Meters</b>
<b>Fan Motor Power (KW)/Hp</b>	<b>5 Hp, 3 Phase</b>
<b>Speed (rpm)</b>	<b>2800 rpm</b>
<b>Fan Safe Guard Mesh</b>	<b>Back Side</b>
<b>Discharge Hose</b>	<b>19 mm</b>
<b>Safety</b>	<b>Locking System for Elevation &amp; Rotation, Other Safety</b>
<b>Limit Switch</b>	<b>2 No. For Automatic Fictional with Limit Switch</b>
<b>Gear Box</b>	<b>2 Nos. For Auto Rotation with Gear Box</b>
<b>Auto Function with</b>	<b>Limit Switch</b>
<b>Auto Swing Motor Power</b>	<b>0.5 Hp</b>
<b>High Pressure Multistage Water Pump</b>	<b>1.5 HP, 1440 rpm [Lubi/ CRI] Multistage</b>
<b>Pump Capacity</b>	<b>1.4 M<sup>3</sup>/Hour</b>
<b>Water Flow</b>	<b>16-20 LPM</b>
<b>Heavy Duty Water Tank (Trolley)</b>	<b>Water Trolley reservation of HDPE martial &amp; of Capacity 1000 Ltrs, 1 Nos MS</b>
<b>Water Misting Pipe</b>	<b>S.S 202-01no</b>
<b>Electric Control Panel</b>	<b>To Operate Fan &amp; Pump, TC</b>
<b>Hose Pipe</b>	<b>To Connect with Pressure/Booster Pump</b>
<b>Trolley For Anti Smog Gun</b>	<b>The Unit will be fitted with wheel base with 4 Wheels with Rake Arm</b>
<b>Hand Lever Operation</b>	<b>Smooth Vertex Handling up to 60°</b>
<b>Size (HxWxL)</b>	<b>1990x1580x2450 mm</b>
<b>Size Of Gun</b>	<b>1100 mm</b>
<b>Horizontal Rotator</b>	<b>To Rotate Anti Smog Gun Horizontally – 220°</b>

**MOB NO: 8285059417**

**Landline No: 011-47026258**

**Fax: 9310633628**

**EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)**

**WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085**

**Warehouse: Kh. No. 1023 & 24, Siraspur,**

**Near Barat Ghar, New Delhi, North West Delhi**

**Pin: 110042**



## TRUSS SCREED MACHINE

### TECHNICAL SPECIFICATION

MODEL	SBI TS 600
Speed	8-10 Meter/Min
Body Material	Aluminium/MS
Power	5.5 HP
Engine	Honda GX160
Engine	Air Cooled, 4 Stock, Gasoline
Max Paving Thickness	260 mm
Screed Length	10 Meter According to Requirement Max Length



## CONCRETE ROLLER SCREED MACHINE

### TECHNICAL SPECIFICATION



MODEL	SBI/CRS 60M
Motor	1.5-2 HP
Finishing	3-6
Diameter	4-5 Inch
Vibration Frequency	50-60 Hz
Auger Rotation Speed	450 RPM
Weight	60-66 Kg

MOB NO: 8285059417

Landline No: 011-47026258

Fax: 9310633628

EMAIL: [sales.shribaljitimpex@gmail.com](mailto:sales.shribaljitimpex@gmail.com)

WEBSITE: [www.shribaljitimpex.in](http://www.shribaljitimpex.in)

Office Add: Pocket C-6/157, Second Floor, Sec-5, Rohini, New Delhi, Pin: 110085

Warehouse: Kh. No. 1023 & 24, Siraspur, Near Barat Ghar, New Delhi, North West Delhi Pin: 110042

# SPARE PARTS

## Road Construction & Flooring Equipment



1



2



3



4



5



6



7



8



9



10



11



12



13



14



15



16



17



18



19



20





SHRI BALJIT IMPEX  
@SHRIBALJITIMPEX9417



shri\_baljit\_impex9417  
Shri Baljit Impex



Shri Baljit Impex



**Office: Pocket C-6/157, Second Floor, Sec-5, Rohini,  
New Delhi, Pin: 110085**



**Warehouse: Kh. No. 1023 & 24, Siraspur, Near Barat  
Ghar, New Delhi, North West Delhi, Pin: 110042**



— **8285059417**



— **9310633628**

**SHRI BALJIT IMPEX**



— **011-47026258**

Thank You for Choosing **SHRI BALJIT IMPEX**



— **[www.shribaljitimpex.in](http://www.shribaljitimpex.in)**

**[www.shribaljit.com](http://www.shribaljit.com)**

**[www.shribaljitimpex.co.in](http://www.shribaljitimpex.co.in)**

**[www.shribaljitimpex.com](http://www.shribaljitimpex.com)**