




Enclosure Systems Catalogue

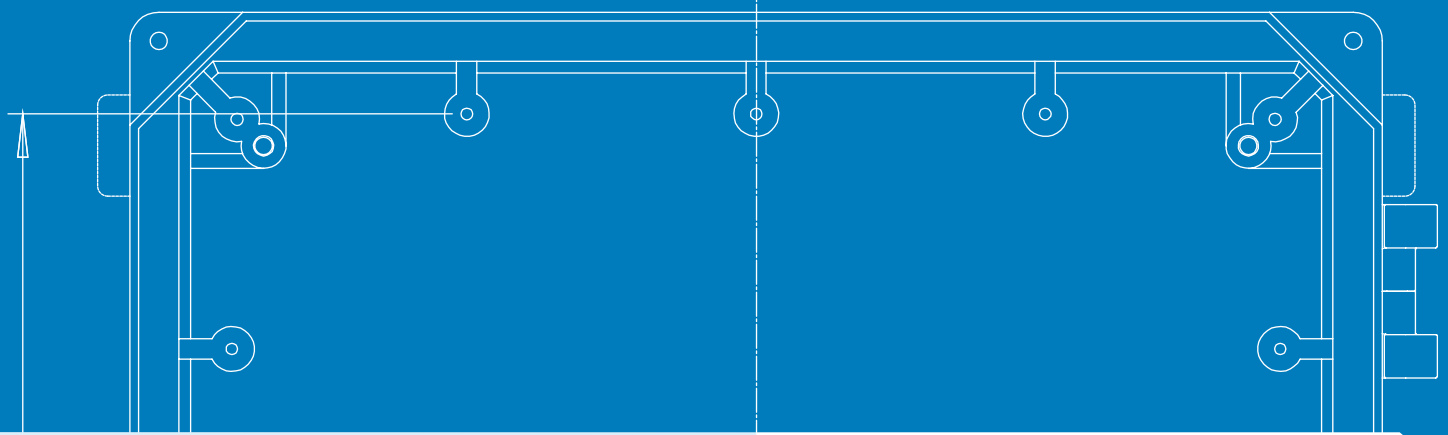

About Us

Sumip Composites Pvt. Ltd. is known for the quality performance of its fiberglass products be it Cable Trays, Street Light Poles, Ladders, Trefoil clamp, Luminaries Etc. It is a company promoted by a group manufacturing industrial electrical and instrumentation products for last three decades, specially designed for the use in various applications. Fiberglass products were specifically developed due to demand from the valued clients.

Research and Development

Our entire range of products and systems are the results of continues innovation and R&D. We can provide competitive products in the market, which is becoming more and more demanding, thanks to our modern and automated production facilities and high quality standards.

Quality

Sumip has developed quality system to assure our customers for the reliability and consistency of our products and our services. All aspects of our operations, from design and development to production and product delivery, are dedicated to ensure superior performance. Which is reliable.



In 1994, **Sumip** introduced first hot press moulded fiberglass enclosures for electrical and instrument panel building. From the beginning, a commitment to innovation resulted in product developing into wide range.

Whatever your application, **SUBOX** product family features the widest range of high quality enclosures for the packaging and protection of electrical and electronic components. Enclosures can be delivered in standard off-the-shelf configurations or customized to your exact specification.

Benefits :


- Excellent record of resistance to corrosion and chemical attack
- High impact resistance
- Rigid construction
- High weather resistance
- Wide operating temperature range
- Fire resistant
- Good insulating properties
- UV Protection

Applications

- Temporary installations
- Electric panel control housing
- Water pump electric control housing
- Instrument Housing
- Meter box application
- Marine electric control housing
- Renewable energy electric control housing
- Telecommunications electronic control housing

GRP Enclosure (with Canopy) - Series G1G

These enclosures are designed for electrical, electronics and instrumentation control systems and provided with inbuilt canopy on all three sides.
169 X 122 X 71 – 350 X 250 X 125 mm



4

GRP Enclosure - Series G2G

These enclosures are designed for industrial, electrical, electronics, instrumentation, pneumatic, hydraulic and solar control systems.
116 X 116 X 65 – 600 X 420 X 215 mm



5

GRP Cabinet Enclosure - Series G3G

These enclosures are designed for electrical, electronics, instrumentation and solar control system. The cover is a hinged door and single point lock.
300 X 250 X 140 – 800 X 600 X 300 mm



6

Stainless Steel Enclosure - Series G2S

These enclosures are manufactured in stainless steel and designed for industrial, food and marine application.
150 X 150 - 800 X 500 (Depth = 80/120 mm, On request up to 300 mm)



7

Stainless Steel Enclosure - Series G3S

These enclosures are manufactured in stainless steel and designed for industrial, food and marine application.
300 X 250 - 1200 X 800 mm (Depth from 140 - 300 mm)



8

GRP Enclosure - Series G4G

These enclosures are designed for electrical and communication control systems.
1000 X 500 X 315 – 1000 X 1250 X 470 mm



9

General Specification

For GRP Enclosure

Colour	: Standard colour RAL 7035, other colours available on request.
Flame Retardant	: Low Flammability (UL-94)
Glow Wire Test °C	: 960°C
Toxicity	: Halogen - Free
Protection Classification	: Up to IP67
Impact Resistance	: Up to IK10
Seal	: Neoprene/ Polyurethane
Water Absorption	: Max. 0.7%

For Stainless Steel Enclosure

Ingress Protection	: Up to IP65
Thickness	: 1.6 mm/2 mm Thick
Finishing	: Matt Finish
Seal	: Neoprene / Polyurethane

(All dimensions are in mm)

GRP Enclosure (with Canopy)

Series G1G

These enclosures are manufactured of hot press moulded glassfiber reinforced polyester (GRP). These enclosures are specifically used for electrical, electronics, instrumentation and pneumatic control system is provided with inbuilt canopy on all three sides.




Model No.	Height	Width	Depth	Depth (with Canopy)
G1G 171207	169	122	71	125
G1G 211208	211	121	78	130
G1G 221608	215	164	83	130
G1G 302310	303	225	99	170
G1G 352513	350	250	125	190




GRP Enclosure

Series G2G

These enclosures are manufactured of hot press moulded glassfiber reinforced polyester (GRP). These enclosures are specifically used for industrial, electrical, electronics, instrumentation, pneumatic, hydraulic and solar control system. These enclosures are made with the very high quality material for the highest performance of the product.

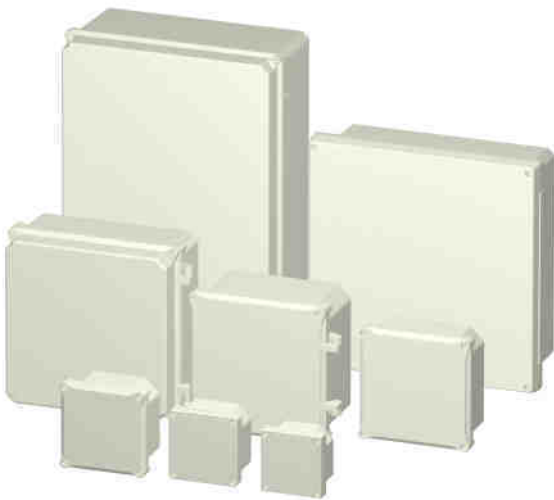

Model No.	Height	Width	Depth
G2G 121207	116	116	65
G2G 131308	132	132	75
G2G 161609	163	163	90
G2G 161610	163	163	105
G2G 212109	213	213	90
G2G 262615	260	260	150
G2G 333313	330	330	125
G2G 333316	330	330	160
G2G 333318	330	330	180
G2G 333322	330	330	215
G2G 424216	420	420	160
G2G 604222	600	420	215



GRP Cabinet Enclosure

Series G3G

These enclosures are manufactured of hot press moulded glassfiber reinforced polyester (GRP). These enclosures are specifically used for electrical, electronics, instrumentation and solar control system. The base is made one piece. The cover is a hinged door and single point lock is provided to lock the same.




Model No.	Height	Width	Depth
G3G 302514	300	250	140
G3G 403020	400	300	200
G3G 504021	500	400	230
G3G 605023	600	500	230
G3G 755025	750	500	250
G3G 806030	800	600	300



Stainless Steel Enclosure

Series G2S

These enclosures are manufactured in SS304 stainless steel quality material. These enclosures are used for industrial, food and marine application. The enclosure has highest resistance to dust water and impact. These enclosures are available in two depths 80mm and 120mm. Also available in SS316 material.

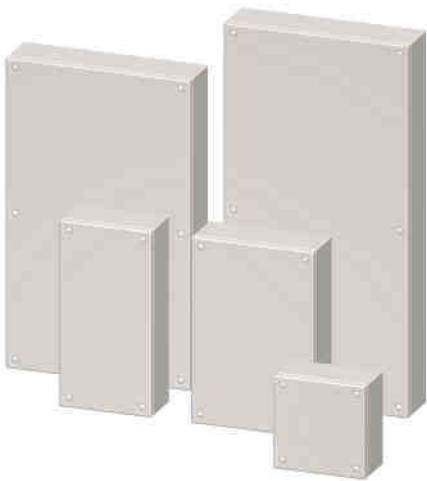

80 Depth

Model No.	Height	Width
G2S 151508	150	150
G2S 202008	200	200
G2S 301508	300	150
G2S 302008	300	200
G2S 303008	300	300
G2S 402008	400	200
G2S 403008	400	300
G2S 404008	400	400
G2S 503008	500	300
G2S 603008	600	300
G2S 604008	600	400
G2S 805008	800	500

120 Depth

Model No.	Height	Width
G2S 151512	150	150
G2S 202012	200	200
G2S 301512	300	150
G2S 302012	300	200
G2S 303012	300	300
G2S 402012	400	200
G2S 403012	400	300
G2S 404012	400	400
G2S 503012	500	300
G2S 603012	600	300
G2S 604012	600	400
G2S 805012	800	500


[Add suffix 'A' for SS316 material]



Stainless Steel Enclosure

Series G3S

These enclosures are manufactured in SS304 stainless steel quality material. These enclosures are used for industrial, food and marine application. The enclosure has highest resistance to dust water and impact.

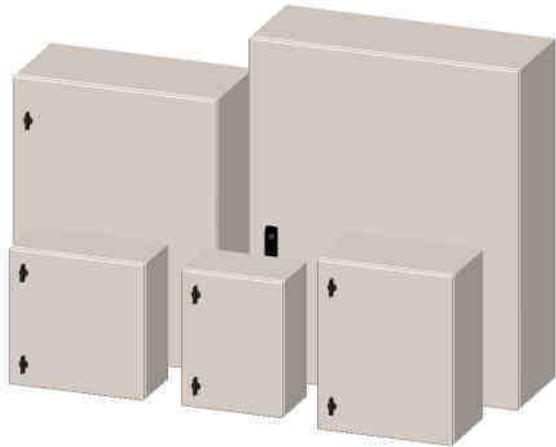

Model No.	Height	Width	Depth
G3S 302514	300	250	140
G3S 403020	400	300	200
G3S 404020	400	400	200
G3S 504020	500	400	200
G3S 605025	600	500	250
G3S 755025	750	500	250
G3S 806030	800	600	300
G3S 1008030	1000	800	300
G3S 1208030	1200	800	300

[Add suffix 'A' for SS316 material]



GRP Enclosure

Series G4G


These enclosures are manufactured of hot press moulded glassfiber reinforced polyester (GRP). These enclosures are specifically used for electrical and communication control systems. The enclosure has gasket / Hinged door and 3 point lock system. Door in front and rear also available.



Model No.	Height	Width	Depth	(Door)
G4G 423A1	1000	500	315	(500x1)
G4G 433A1	1000	750	315	(750x1)
G4G 443A1	1000	1000	315	(1000x1)
G4G 443A2	1000	1000	315	(500+500)
G4G 453A2	1000	1250	315	(500+750)
G4G 435A1	1000	750	470	(750 X1)
G4G 455A2	1000	1250	470	(500 + 750)

- Back Door - Fixed
 - Openable Backdoor Available on Request
- **Combination not available

Combination Options

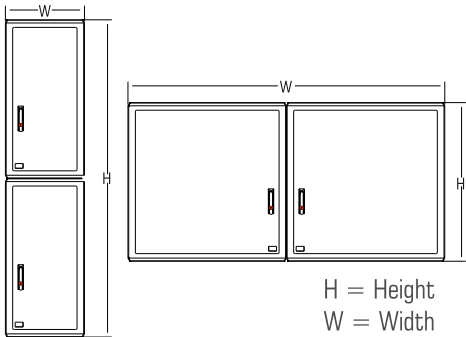

- Height multiple of 1000 mm
- Width variable in multiple of 250 mm, minimum 500 mm



General Accessories



(A) Mounting Plate



(B) Mounting Lugs



(C) SS Mounting Lugs




(D) Thermoplastic Hinge









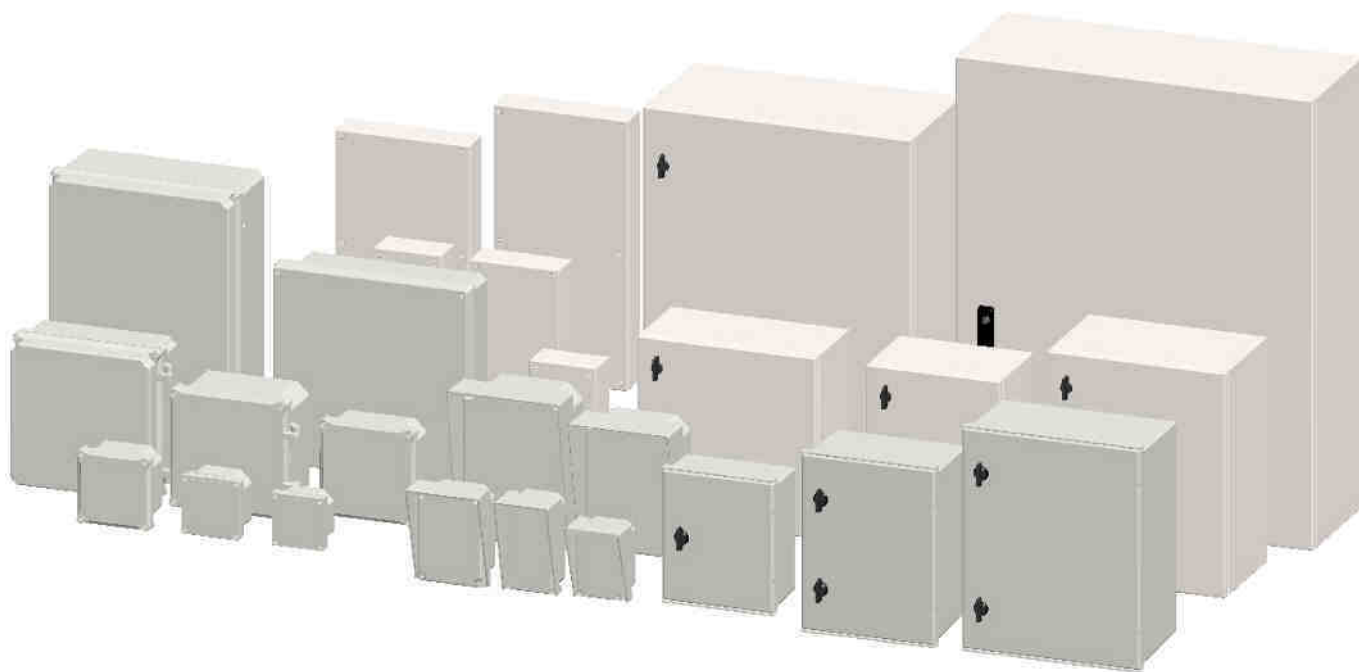
















(E) Door Lock



(F) Adaptor Plate (For G3G)



The IP and IK Classifications

FIRST DIGIT Protection against solid objects		SECOND DIGIT Protection against liquids		IK CODE Protection against mechanical impacts	
IP	TEST	IP	TEST	IK	TEST
0	 no protection	0	 no protection	00	 no protection
1	 protected against solid objects up to 50 mm e.g. to 50 mm e.g. hands	1	 protected against vertically falling drops of water	01-05	 impact < 1 joule
2	 protected against solid objects up to 12 mm e.g. fingers	2	 protected against direct sprays of water up to 15° from the vertical	06	 500 gm 20 cm impact 1 joule
3	 protected against solid objects over 2,5 mm (tools+ small wires)	3	 protected against water sprayed from all directions - limited ingress permitted	07	 500 gm 40 cm impact 2 joule
4	 protected against solid objects over 1 mm (tools+ small wires)	4	 protected against water sprayed from all directions - limited ingress permitted	08	 1.7 kg 29.5 cm impact 5 joule
5	 protected against dust - limited ingress permitted (no harmful deposit)	5	 protected against low pressure jets of water from all directions - limited ingress permitted	09	 5 kg 20 cm impact 10 joule
6	 totally protected against dust	6	 15 cm protected against strong jets of water eg for use on shipdecks - limited ingress permitted	10	 5 kg 40 cm impact 20 joule
		7	 15 cm protected against the effects of immersion between 15 cm and 1 m		
		8	 m protected against long periods of immersion under pressure		

Sumip's Other Products



Fiberglass Cable Tray Systems

SUMIP GRP cable trays are proven in industry since 14 years. It is available in ladder type and perforated type and in comparison to conventional material it has excellent corrosion resistivity and fastest installation. They are made as per NEMA FGI-1993.




Fiberglass Poles

SUMIP Fiberglass poles are manufactured from FILLAMENT WINDING technology, a must for this product. Wind load carrying capacity of our pole is ranging from 35 meters per second to 55 meters per second (i.e. 200km per hour). They are available up to 12 meter height complete with Arm, base and terminal box also.



Fiberglass Ladders

Sumip FRP ladders provide passion to the engineer and technicians to reach working level of different heights comfortably. It is must where safety audit is required. These ladders are tested for electrical insulation for 90 KVrms.



Fiberglass Gratings

Sumip Fiberglass Pultruded Gratings are manufactured so as to adhere to international quality standard combining a matrix of resin and fiberglass. These slip and chemical resistant gratings, are light in weight, non-corrosive and can be quickly fabricated and installed at the site. Economical and maintenance free, they can also be customised to client specification.



Fiberglass Handrails

Sumip Handrails are suitable for places like electrical substations. They are fire retardant and can be easily assembled and installed at the site from durable, prefabricated modular components or can also be custom designed to client specification. (Available in square and round shape, these handrails provide a long service life to your property.)



[®]
SumiP



Manufactured by:
Sumip Composites Pvt. Ltd.

Regd. Office & Works: 1 - 5, Panchratna Industrial Estate, Sarkhej-Bavla Highway, Changodar, Ahmedabad - 382213 Gujarat (India). Ph.: 02717-610710-724, Mob.: +91 9825803340. E-mail : sales@sumip.com | www.sumip.com

Marketed by:
Sumip Marketing Services

Ahmedabad, Gujarat, India.
E-mail : mktg@sumip.com

For more details, you can visit our website www.sumip.com & www.subox.in