

4LZ-4.5 / 4LZ-6.5 COMBINE HARVESTER

- ▶ "Cleaning master" with 3 layer sieve box
- ▶ "High speed" area coverage 45-55 min per Acre
- ▶ Efficient fuel consumption 6-8lit/hr
- ▶ Upgraded technology on gearbox
- ▶ 360° delivery
- ▶ 2.2 cutter bar for high area coverage
- ▶ Operator friendly operation



**FINANCE
AVAILABLE**

FREE GIFTS WORTH ₹1 LAKH



Spare Parts



Electronics Tool Kit



Harvester Cover

Soybean



MULTI CROP COMBINE HARVESTER

Millet



Sorghum



Corn



Wheat



Rapeseed




Ruilong can harvest rice, wheat, corn and other crops in one machine, bringing you higher profits.

GODABARI AGRO MACHINERY AND SERVICES INDIA PVT. LTD.

PARAMETER / RUILONG COMBINE HARVESTER

Model		4LZ-4.5	4LZ-6.5
Type		Self-propelled Whole-feeding	Self-propelled Whole-feeding
Working Dimension	Length(mm)	4920	5150
	Width(mm)	2890	2620
	Height(mm)	2700	3030
Weight (Kg)		3600	3860
Engine	Type	Linline, Water-cooling, Four-stroke, Direct Injection	Linline, Water-cooling, Four-stroke, Direct Injection
	Power(hp)	85/88/90	102/110
	Rated Rotating Speed(r/min)	2600	2600
	Fuel Tank(L)	200	160
	Model	Changchai 4L88	Changchai 4G33TC
Gear Box Model		Hydraulic Type With HST	Hydraulic Type With HST
HST		45cc	45/52cc
Chassis	Track(mm)	500*90*51	550*90*56
	Track Center(mm)	1150	1350
	Grind Clearance (mm)	320	360
Header	Cutting Width(mm)	2200	2200
	Feeding Capacity(kg/s)	4.5	6.5
	Cutting Bar Lift	Hydraulic Control	Hydraulic Control
Thresher	Type	Axial Flow Type With Beat Bars	Axial Flow Type With Beat Bars
	Threshing Cylinder(mm)	Φ620*2010	Φ620*2010
	Separating Type	Vibrating Sieves + Centrifugal Fan	Vibrating Sieves + Centrifugal Fan
Grain Tank	Big Grain Tank(m3)	1.4m ³ , Auto Grain Unloading, Vertical Type	1.8m ³ , Auto Grain Unloading
	Small Grain Tank (0.25m3)	Sack	Sack
Working Efficiency(ha/h)		0.37-0.66	0.5-0.9
Crops		Rice, Wheat, Soybean, Rapeseed	Rice, Wheat, Soybean, Rapeseed

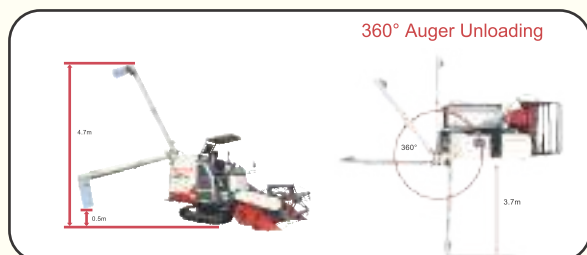

Big Grain Tank Ruilong: 1.4m³ Ruilong Plus: 1.7m³

360°Unloading auger length 3.7m, the highest position 4.5m, the lowest position 0.5m


Meet the requirements of grain unloading under different conditions.



Ruilong:500*90*51

Ruilong Plus: 550*90*56

The chassis wheel system and guide rail are widened and thickened to improve the bearing capacity. The high tooth rubber track and high chassis make the adaptability and passability stronger in muddy fields.

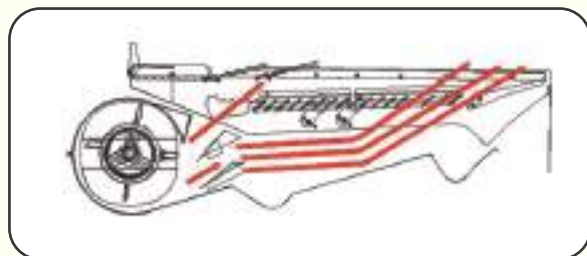

Lower fan diameter (400mm), optimized air channel, Stronger cleaning capacity, cleaning cleaner; Fan air volume and wind direction can be adjusted to achieve efficient cleaning of many varieties of crops.



Φ620mm*2010mm

Longer threshing time, more thorough threshing, reduce grain leakage. High-yield, difficult-to-thresh varieties respond well.



GODABARI AGRO MACHINERY AND SERVICES INDIA PVT. LTD.

PLOT NO. 853/1671(P), 2ND FLOOR, GOVINDA PRASAD, LAXMISAGAR, BHUBANESWAR-751006

www.godabariagro.com

1800-345-2222

gamsales@godabariagro.com

91-9090065222