



## SPEEDFACE - 5 SE



Face



Touch Screen



Masked Face



Live Body Detection



RFID Mifare



WiFi



TCP/IP




Access Control

## Facial Attendance and Access Control

### Storage Capacity

Face ID Capacity	3000
Card Capacity	3000
Max Users	3000
Log Capacity	50,000

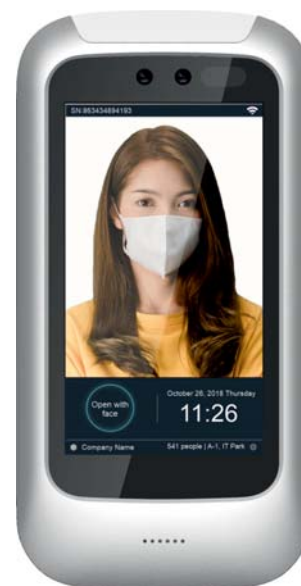

### Features

5-inch capacitive touch screen

DualCoreARM Cortex-A7@900 MHZ Processor

Remotely Firmware Upgradation.

Detect 5 person at a time

5-inch IPS display all-sight LCD touch screen with 480\*854 resolution.

IP54 Grade Highly finished slim device.

Highly reliable and durable

Recognition speed 0.5 seconds

# SpeedFace - 5 SE

## Communication Interface

Communication	WIFI, TCP/IP, USB
---------------	-------------------

## Biometric

Push Data	YES
Remote firmware update	YES
FAR	0.001%
Accuracy ratio	99.27%
Processor	Dual Core ARM Cortex-A7 @900MHz
OS	Linux
Verification time	<=1 second
Mifare card	Yes

## Audio/Visual

LCD	5.0" IPS touch screen display
Shutter type	Electronic Rolling Shutter
Language	English

## Access control

Wiegand out	YES
Relay	YES
Live Detection	YES
Storage	512MB RAM, 4GB ROM

## Power & Environment

Operating Temperature	-10°C ~ 50°C
Power	12V DC / 2A
Dimension	185.8 x 93.7 x 22.5 mm



Auto Focus



Autofill light



Long Distance Verification

Software

Web & Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App

**Disclaimer** : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by   

[www.biomaxsecurity.com](http://www.biomaxsecurity.com)

Connect with us on

 BiomaxOfficial  BioMax Security  
 biomaxsecurity  BioMax Access Control