



Entrances r visiting card of ur premises

MOS-BB-C-2003

(CRASH RESITANT BOOM BARRIER)




MODEL: CRASH RESISTANT BARRIER

WWW.ALASKAGROUP.IN / partner@alaskagroup.in

91-9310878763\91-9313108334

India's No.1 Manufacturer of Entrance Automation Machines

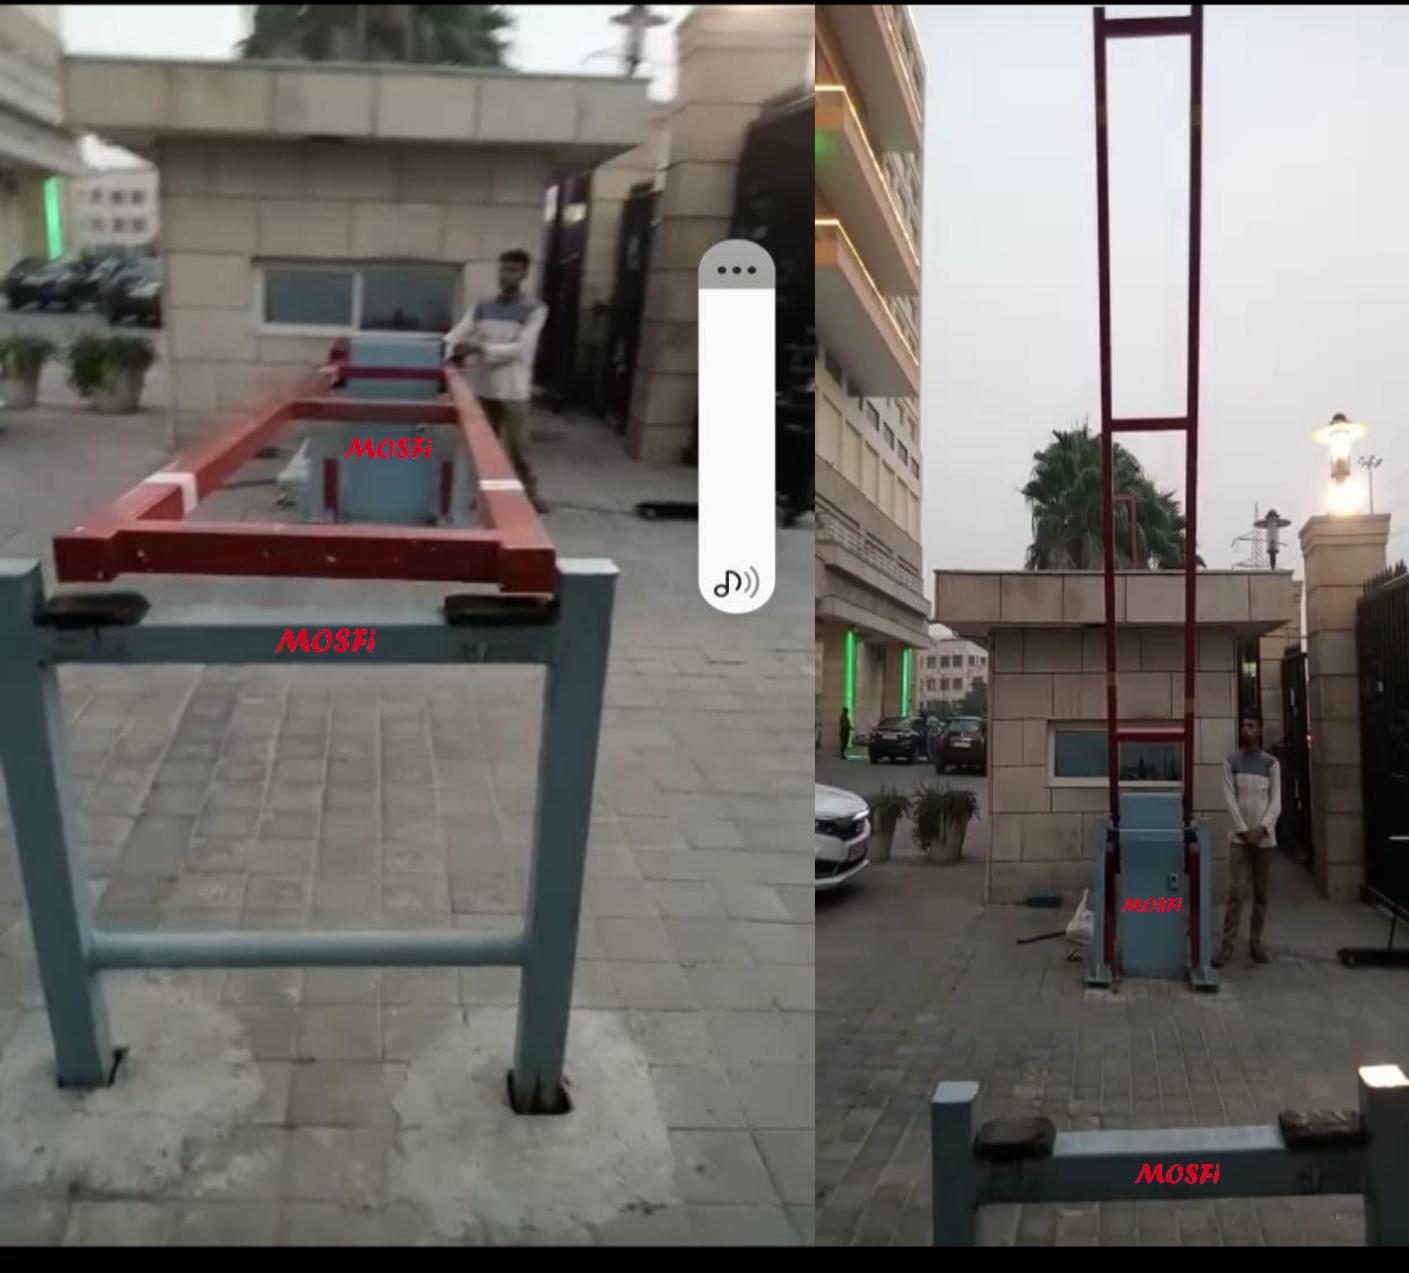

WWW.ALASKAGROUP.IN / partner@alaskagroup.in

91-9310878763\91-9313108334

India's No.1 Manufacturer of Entrance Automation Machines

ABOUT US

Advanced Indigenous Manufacturing Embellish with german technology AAPL is India's No.1 Entrance Automation M/C Manufacturer and exporter since decade by our regular enhancement in innovative technology, commitments to quality and reliable customer services make the most emerging player in global Market.

Our manufacturing facility is in heart of Delhi's industrial area (OKHLA INDUSTRIAL AREA) by virtue of quality control of our machines & management are standard of ISO 9001:2015/



OUR QUALITY & EXPERTIES

Our Regular & Continuous Efforts Result best line of production & quality machine manufacturer. Also we have venture with German and European Technology Companies for implement the Modern

*** OUR ACHIVMENTS ***

LIFE TIME OPPORTUNITY : SERVE CENTRAL VISTA PROJECT

GREAT OPPORTUNITIES :

- Secured around 25 % air force stations with our technology and machinery.
- Regular serve Indian Army/NAVY/CRPF/CISF other security agencies.
- Serve Technical giants :- DRDO, NTPC, INDIAN OIL, NHPC, ONGC, BHABHA ATOMIC PLANT, BHARAT ELECTRONICS LIMITED, L&T, DLF, ADANI, CFCL, BHARAT DYNAMICS LIMITED, GUN & SHELL FACTORY, SCHINIDER, RFCL....etc.**

WWW.ALASKAGROUP.IN / partner@alaskagroup.in


91-9310878763\91-9313108334

India's No.1 Manufacturer of Entrance Automation Machines

(CRASH RESISTANT BOOM BARRIER)

Technical Specifications:

Open/close time	6 sec
Length	Boom arm 10 ft (UPTO 3 mtr MAX)
Counterbalance boom control	Counterbalancing the weight of the boom. M.S weight cubes (for heavy duty operation)
Boom material	Mild steel 50*50*5 mm bend sheet pipe straight arm with MS boom stand locking with rubber rest
Barrier material	1283*1247*460 mm MILD STEEL with anti corrosion treatment for very long life 16 gauge bend sheet
Protection	Control & switchgear/siemens, contractor: Schneider, terminals: electronic circuit phoenix or standard make Limit switch : Available
System operating	Operates satisfactory 200-250 v
Motor	Customized MOSFI ac 1/4 HP motors power consumption: less than 200 watts motor speed :1400 rpm
Voltage,	220V±10%,/110V±10% SINGLE PHASE AC, AC 50/60HZ, (also available in 3 phase with VFD CONTROLLER OPTIONAL)
Gear unit	Customized MOSFI low friction gear for smooth & long life operation ,with hand crank
Temp/ Humidity Noise	working temperature :-5°C to + 60°C Humidity:5-90%, 45db,
Paint type	Powder coated RAL 6001 with reflect retro
Obstacle of boom	Boom remain at that particular position where its last assumed.
Boom locking	Automatic locking WITH GRIPING SYSTEM
Operation mode	Electronic push button switches//manual hand crank option with all access control
Power failure	Manual release (by hand crank option)
Weight	110 kg(approx.)+-10%

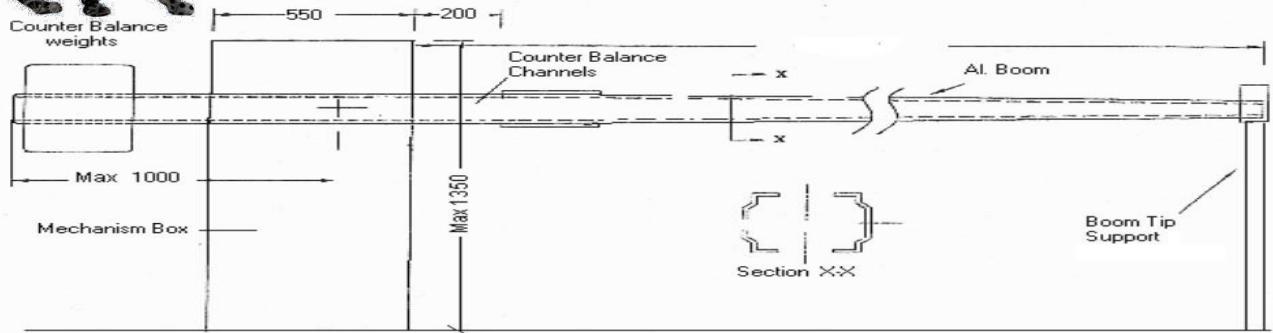

Not to Scale
All Dimensions Approx. in mm

OUR OTHER PRODUCTS



Kindly Note : AAPL Reserve the rights to make changes at any stage without any prior notice. Color & Shape
may be changed from time to time.

©Copyeight2017 Mosfi Logo and Designs are Subject to Registered Trademark and Patent of
Alaska Automation Pvt. Ltd. or Related Companies. All Specifications / Images are subject to
change without Notice. All right reserved.