FIRE BRIGADE INLET (4 WAY)



SS304, 63 mm

Fire Brigade Inlet (also called Pumping In Breech) allows Fire Tenders (Pumpers) to pump in water into the Dry Riser/ Wet Riser/ Sprinkler system piping using external water sources such as hydrants. Fire Brigade Inlet is fitted with required number of standard Male Instantenous inlets to feed the Riser pipe depending upon size.

Brief Description: AAAG Fire Brigade Inlet (Pumping in Breech), made of Stainless Steel (SS304), having 4 Nos. 63 mm size Male Instantaneous inlets (with NRV), and 150 mm size flanged outlet, suitable for connection to Dry Riser piping. Fire Brigade inlet body shall be provided with drain valve for draining water after operation.

4 0	~-			_	^ _	
1.0	(ı-	NFI	КΔІ		ΔΙ	Δ

1.1 Make AAAG

1.2 Model 4-Way FB Inlet

1.3 Inlet4 Nos Male Instantaneous Adaptor (63 mm) with NRV1.4 Outlet150 mm NB Flanged (IS: 1538 / ANSI B 16.5 150#)

1.5 Material of Construction Stainless Steel (SS304)1.6 Reference SBJ Drawing (See below)

2.0 MATERIAL OF CONSTRUCTION

2.1 Body/Flange SS304, IS:3444, Grade I
2.2 Male Adaptor SS304, IS:3444, Grade I
2.3 Drain Valve SS304, IS:3444, Grade I
2.4 Inlet Caps/Seat Washer Rubber, IS:937 Type A

3.0 TESTING AND QUALITY CONTROL

3.1 Dimensional check See drawing below

3.2 Hydrostatic Pressure Test 21 Kgf/cm² for 2.5 minutes

3.3 Documentation Internal inspection report, supplier's certificates, approved

laboratory test certificates

4.0 OPERATIONAL/ TECHNICAL DATA

4.1 Working Pressure 7 Kgf/cm²

4.2 Weight (approx.) 18.0 Kgs. (approx)

5.0 FINISH

5.1 Body Painted - Fire Red Color

5.2 Male Adaptor Polished

6.0 APPROVALS & MARKING

6.1 Approvals --


6.2 Marking AAAG/ Year of Mfg./SI No


7.0 WARRANTY


7.1 Warranty & Guarantee 12 Months from the date of supply

Ahmedabad – 380001.

Email: info@aaagindia.in, Web: www.aaagindia.in

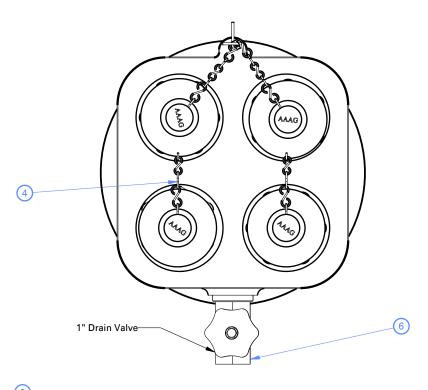

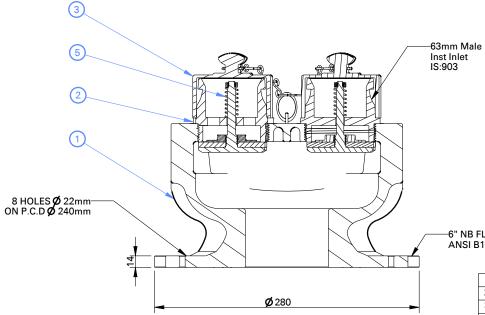

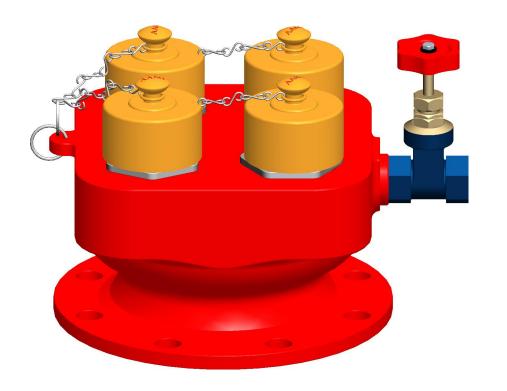

NOTES:

Hydraulic Pressure Test For Body: 21 KGF/CM2 (FOR 2 MIN.)



Shah Bhogilal Jethalal & Bros.

AHMEDABAD

TITLE:

Fire Brigade Inlet, 4 Way (Male Instantenous With NRV) SS 304

SCALE	DRAWING NO:	SHEET	REV.
N.T.S	S154-63BJ	1 OF 1	0

-6" NB FLANGE AS PER ANSI B16.5 150#

NO.	DESCRIPTION	MATERIAL
6	DRAIN VALVE	BRASS
5	SPRING	S.S IS: 6528
4	CHAIN	GALVENIZED
3	BLANK CAP	PVC
2	MALE INST. N.R.V	S.S 304 (IS:3444 Gr.1)
1	BODY	S.S 304 (IS:3444 Gr.1)

PART LIST