

1<sup>st</sup> Floor, Above Bhairavnath Post Office,  
Opp Pragati Society, Nr. Meera Cross Roads  
Maninagar, Ahmedabad - 380028  
Tele Fax : + 91-079-25431453, 8140179903

Website :- [www.sspumpsindia.com](http://www.sspumpsindia.com), E-mail :- [info@sspumpsindia.com](mailto:info@sspumpsindia.com).

## FUEL TRANSFER PUMPS

### ❖ EX PROOF DC POWERED PUMP

#### MODEL: DCEX56 / DCEX75

This 12 v ex-proof pump is especially for fueling the GASOLINE,( Diesel & Petrol ) And its pump head with iron material, and with 100 % copper lining, its specification as follows.

- A : With Ex-proof protection.(CMRI CERTIFICATE IS NOT AVAILABLE)
- B. Pump with by pass and self priming.
- C. Thermal overloads protection.
- D. Filter and connectors
- E. 30 – minute duty cycle / not for continuous operation

MODEL	DCEX56	DCEX 75
Maximum flow rate	56 LPM	75 LPM
Explosion –Proof motor	¼ HP	¼ HP
Voltage	DC 12 V	DC 12V
Out let size	1”	1”
Threaded tank adapter	2” NPT	2” NPT
Nozzle Hanger	YES	YES



#### MODEL:- ACEX 70

220 V Ex Proof Pump Vane Pump ideal for Diesel & LPG



MODEL	ACEX 70
Voltage	220 v , 50 Hz
Body Material	Cast Iron
Maximum flow meter	70 lpm
Explosion –Proof motor	1/3 hp
Inlet	1”
Outlet	1”
Motor speed	1500

### ❖ ELECTRIC TRANSFER PUMP (DCTP-40/ 80)

MODEL	DCTP-40	DCTP-80
VOLT	DC12V/24V	DC 12V
POWER	200 WATT	250 WATT
MAXIMUM HEAD	15 MT	15 MT
INLET X OUTLET	¾ “ X ¾ “	1” X 1”
MAXIMUM SUCTION	5 MT	5 MT



## ❖ ADBLUE PUMP

### MODEL:- ACAD 40 / DCAD40


- A. Permanent magnet and continuous duty.
- B. Inbuilt –Pressure switch automatically starts and stops pump when faucets is opened and closed.
- C. Self priming so pump can be located above water tank / drum
- D. Runs dry for extended periods of time without damage.
- E. Ideal for drum application.
- F. Suitable for oil diesel and light acids.
- G. Not suitable for petrol, solvents and chemicals which affect on properties of plastic and rubber.



MODEL	ACAD 40	DCAD 40
Pump Body Material	EPDM	EPDM
Maximum Flow rate	40 LPM	40 LPM
Maximum Head	15 mtr	15 Mtr
Voltage	230 V AC	12 v DC
Self priming	YES	YES

## ❖ ROTARY VANE PUMP


ZYB – 50 / ZYB – 80 Vane pump built in air separator, by pass valve, filter is with three different top covers for different connecting pipes. A type, B type and C type. With the advantage of low noise, high flow rate, long life services etc....

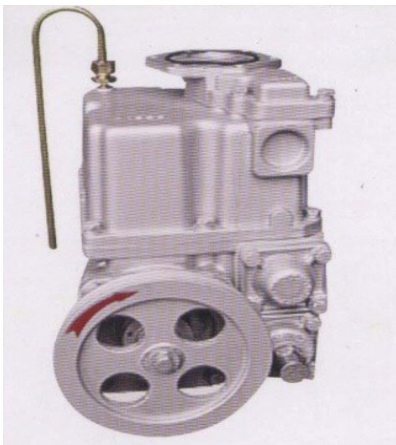

MODEL	ZYB-50 / ZYB-80
SPEED	630 RPM
FLOW RATE	45 lpm ~ 65 lpm
VACUUM	> 0.054 MPa
NOISE	<72 db
WORKING PRESSURE	0.16 ~ 0.2 Mpa
NET WEIGHT	17 kg
GROSS WEIGHT	17.5 kg
DIMENSION	340x260 x 370 mm

## ❖ BARREL PUMP

MODEL	FLOW L/MIN	HEAD IN MTRS	POWER KW	SIZE MM	IMPELLER/ OUT LET MATERIAL	PUMP TUBE MATERIAL
MBAL SB-2	110	7 mtr	1.1	50/25	plastic	ALUMINIUM

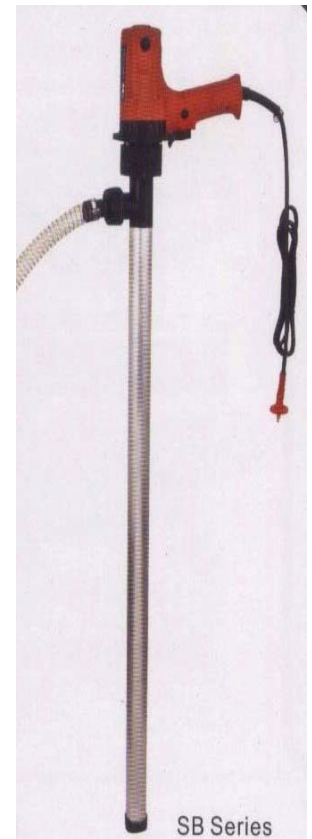

SB Series