



HDMP 20-S1

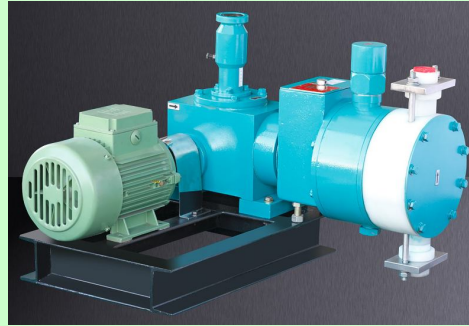

SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1500 RPM				MODEL	PL. Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED - 185 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1500 RPM			
Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w				Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w
11	15	0.37	0.37	HD MP 20 S1	16	80	0.75	0.75	43	15
17	15				20	60			68	15
24	15				24	50			98	15
48	15				26	48			115	15
68	15				28	25			133	15
82	15				30	20			153	15

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	EN 8	1	Sealing Ring	PTFE
2	Liquid Head	SS304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE	2	Gland Packing	PTFE
4	Non Return	SS304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE	3	NRV Balls	SS, PTFE, Glass, Ceramic

FEATURES

- Multiple head pumps with common drive for mixing two or more liquid in a desired ratio.
The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

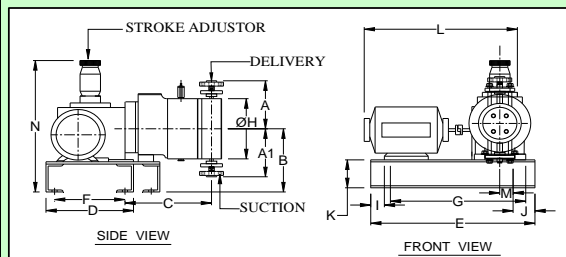

DIMENSIONS IN MM

A	A1	B	C	D	E	F	
130	130	180	250	200	340	170	
G	H	I	J	K	L	M	N
330	Ø150	10	15	75	400	30	350

WEIGHT (App) : 36 KG.

PACKING SIZE : 18 x 16 x 16 Inches