



MP-20

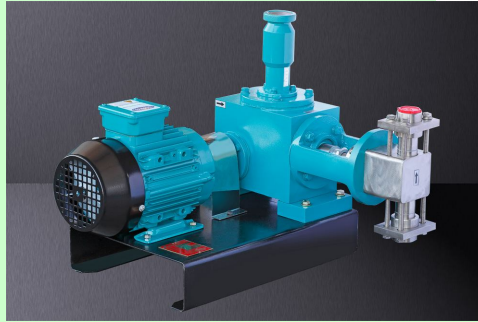

SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1500 RPM				MODEL	PL. Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED - 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1500 RPM			
Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w				Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w
15	15	ALL	0.37	MP - 20	14	120	33	15	100	0.75
31	15				20	99	68	15		
49	15				24	69	98	15		
87	15				32	38	174	15		
136	15				40	25	271	25		
164	15				44	20	328	25		
195	15				48	17	391	25		
280	25				54	13	495	25		
326	25				62	10	652	25		
358	25				64	9	695	25		
381	25	66	8	739	25	50	0.75			

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	SS304,SS316,SS304L, SS316L	1	Plunger Ring	PTFE
2	Liquid Head	SS304, SS316, Hastalloy, alloy20	2	Gland Packing	PTFE
3	Through Bush	SS304, SS316, hastalloy, alloy20	3	NRV Balls	SS, PTFE, Glass Ceramic
4	Non Return Valves	SS304, SS316, hastalloy, alloy20 PP, PVC, PTFE			

FEATURES

- Multiple head plunger pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

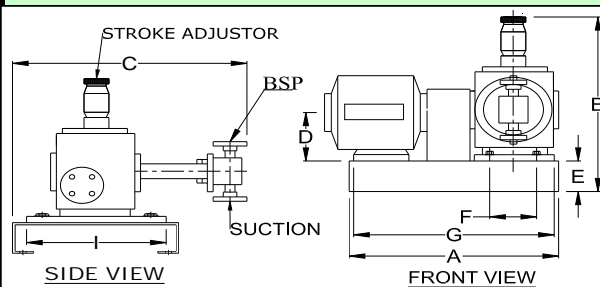

DIMENSIONS IN MM

MODEL	A	B	C	D	E	F	G	I
MM II	402	405	450	75	70	90	385	268

WEIGHT (App) : 62 KG.

PACKING SIZE : 20 x 20 x 17 Inches

MINIMAX PUMPS PVT. LTD.

PLOT NO. 69, SICOF, 328, MIDC, SATPUR, NASHIK - 422007. MAHARASHTRA, INDIA.

Tel. : +91-253- 6649383,

Mobile : 09130022891, 9130022894, 9130022893

E-mail : minimaxpumpsprivtltd@gmail.com

Website : www.dosingpumpsindia.co.in / www.minimaxdosing.co.in,



ISO 9001 2008