



MP - 35

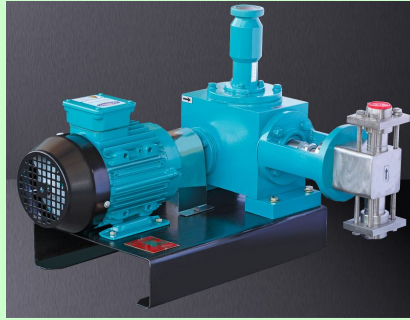

SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1500 RPM				MODEL	PL. Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED - 185 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1500 RPM			
Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w				Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w
24	15	100	1.5	MP - 35	12	275	48	15	100	1.5
59	15				20	200	119	15		
86	15				24	155	171	15		
152	25				32	87	304	25		
238	25	70	2.2		40	56	475	25	70	2.2
342	25				48	39	684	25		
433	25				54	31	866	25		
571	25				62	23	1142	40		
627	25	40	1.1		65	21	1255	40	40	2.2
770	25				72	17	1540	40		
1023	40				83	13	2046	40		
1203	40				90	11	2406	40		
1484	40	25	2.2	100	9	3000	40	25	2.2	

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	SS304,SS316,SS304L, SS316L	1	Plunger Ring	PTFE
2	Liquid Head	SS304, SS316, alloy20	2	Gland Packing	PTFE
3	Throught Bush	SS304, SS316, alloy20	3	NRV Balls	SS, PTFE, Glass Ceramic
4	Non Return Valves	SS304, SS316, alloy20 PP, PVC, PTFE			

FEATURES

- Multiple head plunger pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

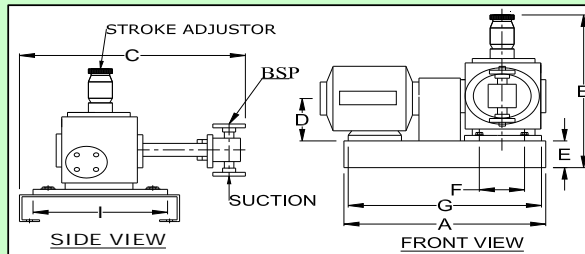

DIMENSIONS IN MM

MODEL	A	B	C	D	E	F	G	I
MM III	605	490	585	45	70	70	577	305

WEIGHT (App) : 135 KG.

PACKING SIZE : 28 x 24 x 23 Inches



MINIMAX PUMPS PVT. LTD.

PLOT NO. 69, SICOF, 328, MIDC,
SATPUR, NASHIK - 422007. MAHARASHTRA, INDIA.
Tel. : +91-253-6649383 Cell : +91-9130022891, 9130022894
E-mail : minimaxpumpsptltd@gmail.com

Web: www.dosingpumpsindia.co.in / www.minimaxdosing.co.in



ISO 9001 2008