


# Four Load Cell Flame Proof Scale

## CTG-F Series



**aczel**

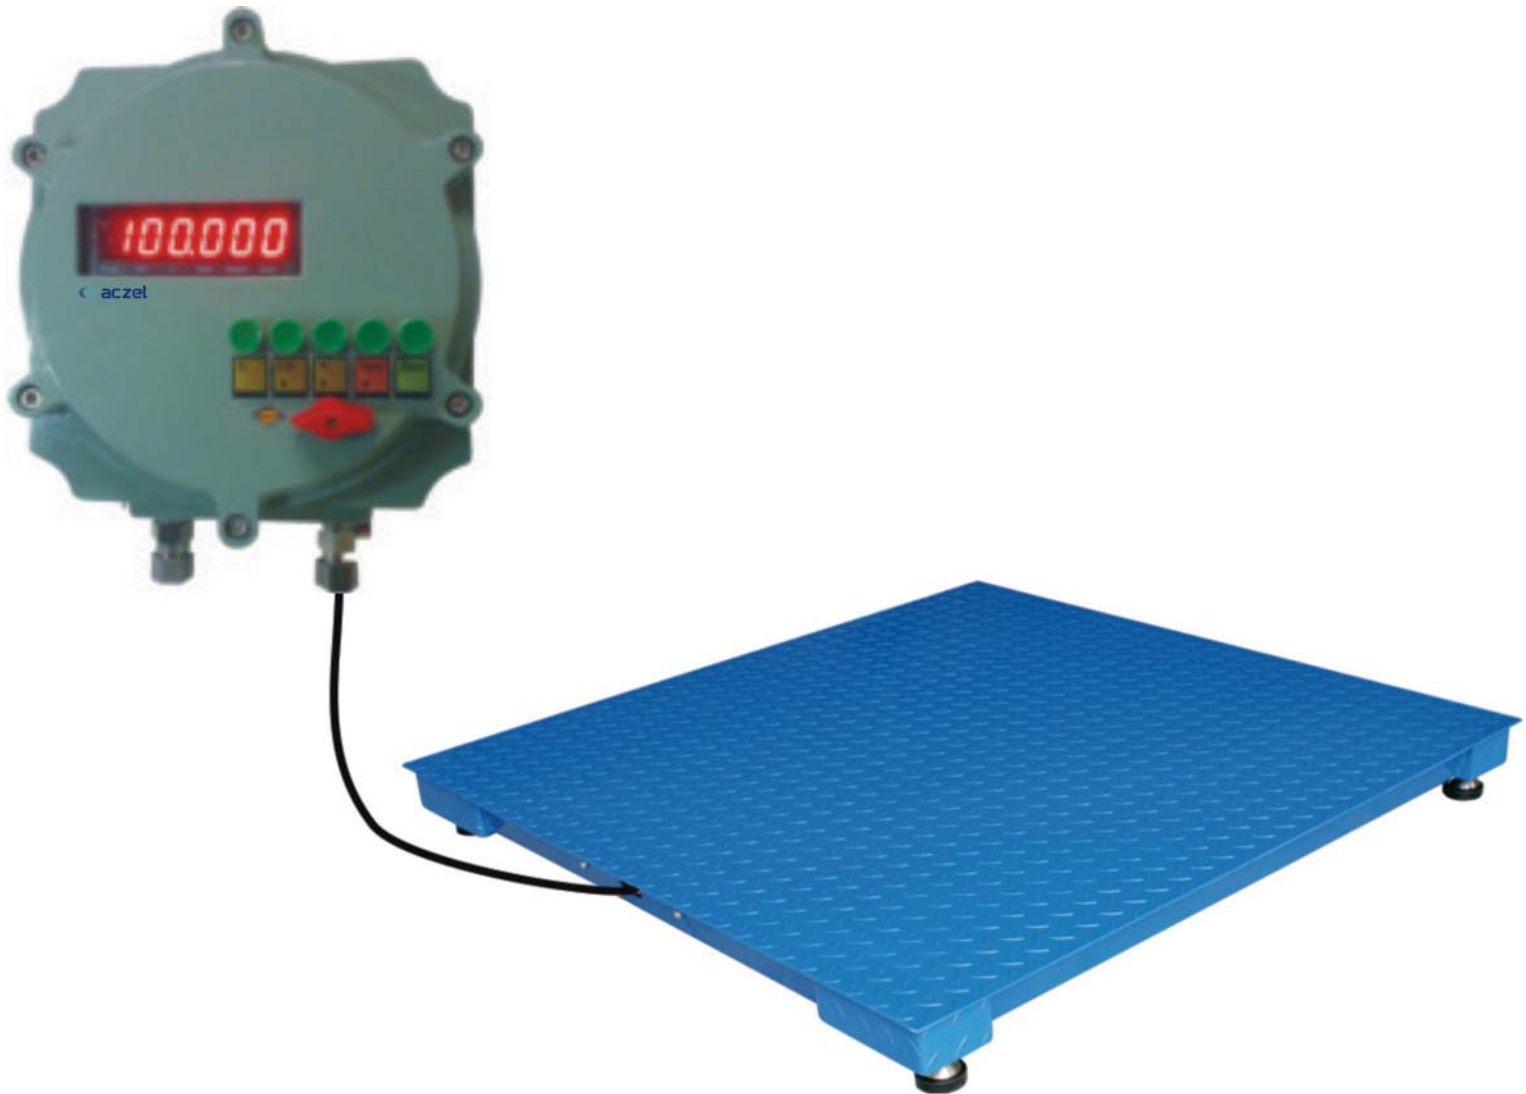

### Standard Features

- High resolution up to 15,000 counts.
- Environmentally protected load cell IP 67 Class.
- Rugged construction suitable for industrial environment.
- All models are certified by CIMFR (Dhanbad) for use in Hazardous areas.
- Ultra-Low, Chequered plate.

### Group :

IIA & IIB Atmosphere & zone I & II use with intrinsically safe zener barriers.

UltraLow Profile also available on request models CTGxxULP Series.

### Display

- 0.56" Bright RED LED display.

### Power Supply

- AC 230V + 10% 50-60Hz

### Optional

- 4-20 mA, set point facility
- Relay output facility

Model	CTG 1T4 FP	CTG 1T4 FP	CTG 2T4 FP	CTG 3T4 FP	CTG 5T4 FP	CTG 5T4 FP
Capacity	1 Ton	1 Ton	2 Ton	3 Ton	5 Ton	5 Ton
Readability	200 gm	200 gm	500 gm	500 gm	1 kg	1 kg
Pan Size (mm/inch)	1000 x 1000 / 3.3' x 3.3'	1200 x 1200 / 3.9' x 3.9'		1500 x 1500 / 4.9' x 4.9'		2000 x 2000 / 6.6" x 6.6"
Display	Bright RED LED Display					
Power Supply	AC 230V + 10% 50-60Hz					

Specification are subject to change without prior notice. Images shown are for illustrations purpose only.

**WORLD WIDE MARKETING**

**ACZET PVT. LTD.**

Unit E2, Plot No. 15, WICEL Estate, Opp Seepz Gate No. 1, Andheri (E), Mumbai 400 093. (INDIA)  
 Tel. : +91-22-4243 7700 • Fax : +91-22-4243 7800 • E-mail : sales@aczel.com • Web : www.aczel.com