
Ultra Low Profile Scale CTG-U.M.S. Series



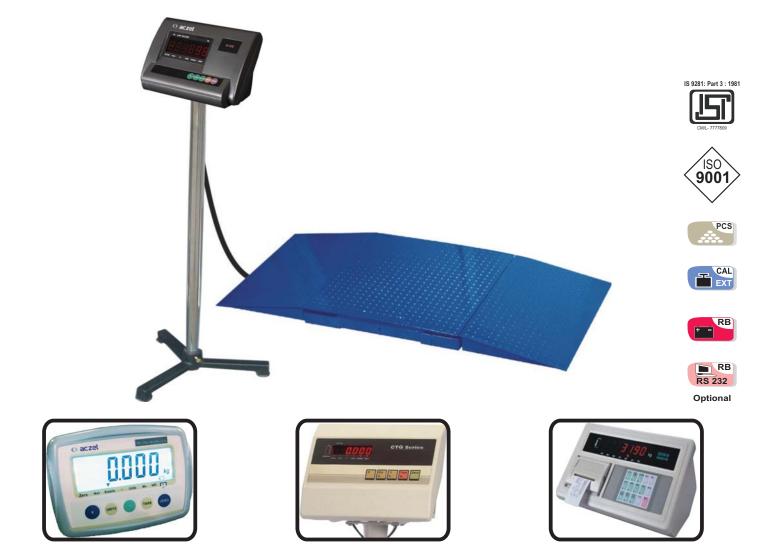

Standard Features

• High resolution up to 15,000 Counts.

LCD Indicator

- Four load cell structure for rugged and durable weighing.
- Built-in rechargeable battery for continuous use.
- Handles for convenience of positioning and removal.
- Ultra-low, chequred plate with both side reversible ramps for easy goods movability.
- Safety overload protection.

Power Supply

• AC 230V + 10% 50-60Hz & with built-in rechargeable battery backup.

LED Indicator

Optional

- 4-20MA & Set point facility
- RS 232 interface Port facility
- Built-in Printing Indicator

Display

- 0.56" Bright RED LED/LCD display.
- Environmentally protected load cell.

Built-in Printer Indicator

• Safety overload 150% of FS

Model	CTG 600L U.M.S.	CTG 1 4L U.M.S.	CTG 2 4L U.M.S.	CTG 3 4L U.M.S.
Capacity	600 kg	1 Ton	2 Ton	3 Ton
Readability	100 gm	200 gm	500 gm	1 kg
Pan Size (mm/inch)	600 x 600 / 23.6" x 23.6"	1000 x 1000 / 39.4" x 39.4"	1200 x 1200 / 47.2" x 47.2"	
Display	Bright RED LED / LCD Display			
Power Supply	AC 230V + 10% 50-60Hz			

Specification are subject to change without prior notice. Images shown are for illustrations purpose only.

WORLD WIDE MARKETING

ACZET PVT. LTD.