



# ATLANTIC MAX POWER X-TREME 10000

Premium Semi-Synthetic PCMO

## PRODUCT DATA

### DESCRIPTION

**Atlantic Max Power X-treme 10000** is a semi synthetic lubricant based on carefully selected highly refined base oils. This passenger car engine oil of the latest generation is for the lubrication of all gasoline and diesel engines with turbo. It is mainly used for severe duty use, like racing and hot climates. Its high viscosity ensures a perfect lubrication under those conditions.

### APPLICATIONS

**Atlantic Max Power X-treme 10000** are suitable for a variety of automobiles, modern, high-output, multivalve, turbocharged & supercharged Gasoline powered passenger cars and Diesel powered light duty vehicles. These superior grade, highly shear-stable, multi-grade gasoline engine oils are formulated for passenger cars and light truck engines requiring optimum performance under all operating conditions.

### PROPERTIES

**Atlantic Max Power X-treme 10000** are specially formulated for ultimate performance in non-turbo or turbo-charged petrol engines, including those using partial alcohol fuels - of passenger cars and competition cars. Extra additives resist extreme operating conditions during rallying and racing.

### PERFORMANCE FEATURES AND BENEFITS

- Delivers and sustains maximum horsepower for longer, even when under pressure
- Protects short and long term engine performance
- Ensures maximum protection under all driving conditions
- Delivers unsurpassed levels of protection across a variety of driving conditions
- Excellent high and low temperature properties to provide dependable protection across a wide range of driving conditions
- Good protection against rust and corrosion
- Superior dispersants provide excellent control over soot induced oil thickening.

### RECOMMENDATIONS / SPECIFICATIONS


**INTERNATIONAL STANDARDS :** API SN

ACEA: A3/B4

**RECOMMENDED FOR USE:** Ford, GM, PSA, BMW, VW, Audi and Mercedes-Benz

TYPICAL TECHNICAL PROPERTIES	
Viscosity Grade, SAE J300	10W-60
Product code	12407AL
Density at 15°C, g/ml, ASTM D4052	0.855
Cold Cranking Viscosity(CCS), mPa s, ASTM D5293	6880 @-25°C
Kinematic Viscosity at 40°C, mm <sup>2</sup> /s, ASTM D445	190.35
Kinematic Viscosity at 100°C, mm <sup>2</sup> /s, ASTM D445	24.5
Viscosity Index, ASTM D2270	160
Flash Point(COC),°C, ASTM D92	224
Pour Point, °C, ASTM D97	-33
Total Base Number, mg KOH/g, ASTM D2896	10.13
Sulphated Ash, %wt., ASTM D87	1.25
Calcium, %wt., ASTM D5185	0.2928
Zinc, %wt., ASTM D5185	0.0891
Phosphorus, %wt., ASTM D5185	0.0817

**Note:** These characteristics are typical of current production. While future production will conform to Atlantic's specification, variations in these characteristics may occur.

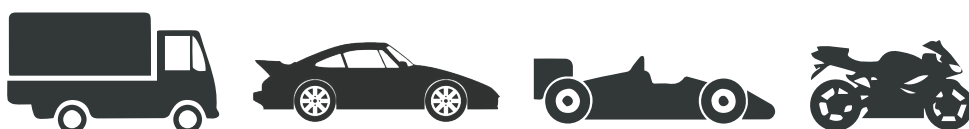

**Packing :** 1L | 4L | 5L | 208L

**Health and Safety:** This lubricant, when used in accordance with our recommendations and for the application for which it is intended, does not constitute any special hazard. A safety data file conforming to the requirements of current EC legislation is available from your local trade consultant.