


FILTER MAX SERIES TOP MOUNT FILTER (MFV17-MFV35)

NEW



FEATURES

- Compact and heavy duty
- Made of high density polyethylene
- Designed for most domestic swimming pools or spa pools
- Valve is designed to allow 360 degree rotation to simplify installation
- Easy-to-use water drain plug and multi-port valve lets you select any of the valves / filter operation with a simple lever-action

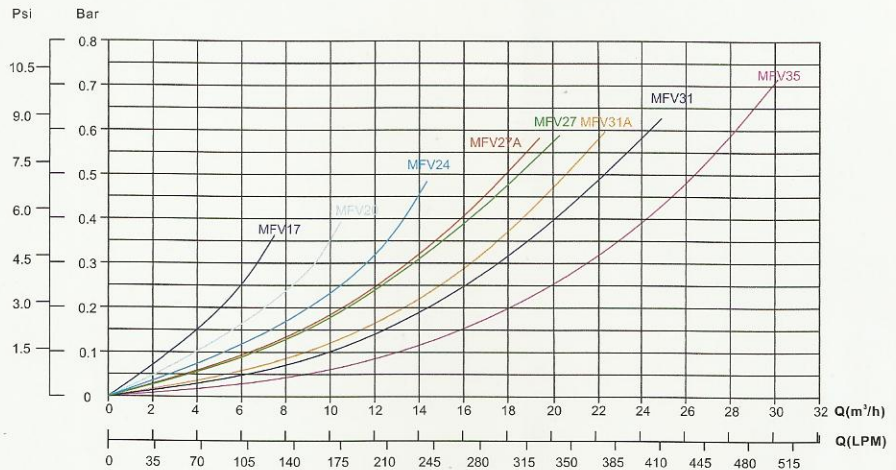


FUNCTIONS: Refer to 6-Way Multi-port Valve

Maximum Working Pressure 250kPa/36psi/2.5bar
 Factory Testing Pressure 400kPa/58psi/4.0bar
 Size of Silica Sand 0.5-0.8mm
 Maximum Filtration Velocity 50m³/h/m²
 Maximum Water Temperature 50°C (122°F)

TECHNICAL CHARACTERISTICS

Code	Model No	Filter Area(m ²)	Valve Connections	Max Flow Rate	Sand(kg)
88012526	MFV17	0.14	1½ inch 50mm	125lpm 7.5m ³ /h	40
88012527	MFV20	0.20	1½ inch 50mm	175lpm 10.5m ³ /h	70
88012528	MFV24	0.28	1½ inch 50mm	238lpm 14.3m ³ /h	125
88012529	MFV27A	0.36	1½ inch 50mm	325lpm 19.5m ³ /h	185
88012530	MFV27	0.36	2 inch 63mm	338lpm 20.3m ³ /h	185
88012531	MFV31A	0.47	1½ inch 50mm	373lpm 22.4m ³ /h	320
88012532	MFV31	0.47	2 inch 63mm	412lpm 24.7m ³ /h	320
88012533	MFV35	0.61	2 inch 63mm	515lpm 30.9m ³ /h	430

Model No	A mm	B mm	C mm	D mm	E mm
MFV17	816	425	695	625	195
MFV20	889	500	772	712	225
MFV24	980	600	860	800	280
MFV27A	1081	675	963	903	300
MFV27	1133	675	976	910	300
MFV31A	1126	775	1008	948	370
MFV31	1178	775	1021	955	370
MFV35	1296	875	1139	1073	440

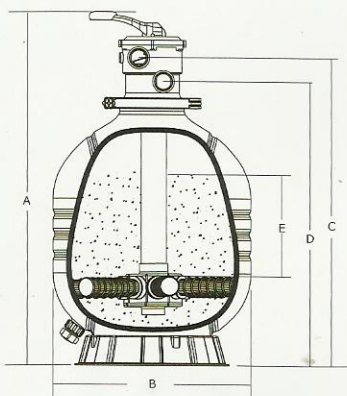

Sand size may differ from country to country and therefore sand weights may vary.