


## "SC" Series Pump

"SC" series swimming pool pump is designed for medium head installation in medium or domestic pool. 1.5 inch suction and discharge port with transparent lid. It operates at a low decibel and easy maintenance.

### Technical Information

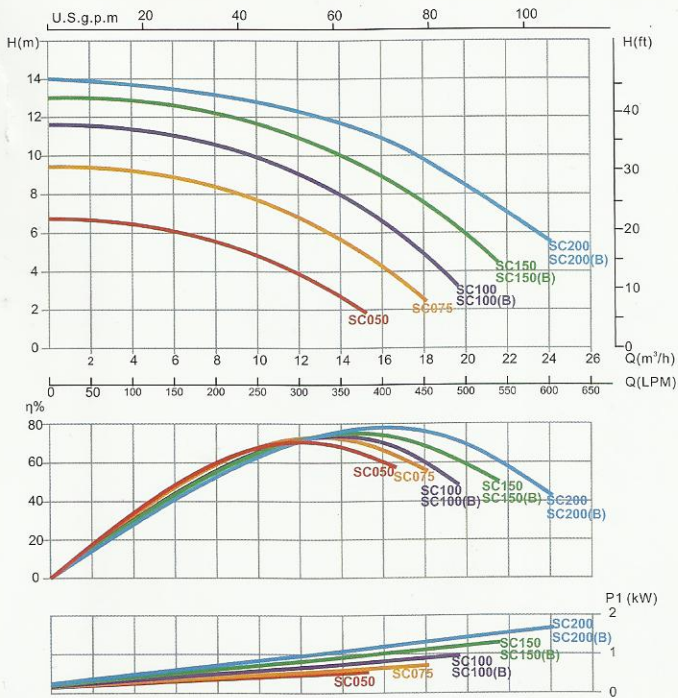

Remarks: Flow curve information based on 220V/50Hz and 380V/50Hz motor.



### Highlight Features:

- Asynchronous, Two poles
- Class insulation: 130
- IPX5 Waterproof standard
- Built-in thermal protection
- Overload protection
- External heat sink
- Available in 50Hz or 60Hz with 220V/380V/110V
- Special design union compatible for both Imperial and Metric measurement standard
- S.S 316 Shaft
- S.S 316 Mechanical seal

### TECHNICAL INFORMATION & Dimension

Code 220V/50Hz	Code 110V/60Hz	Code 380V/50Hz	Model No	Connection Size(IN)	Connection Size(OUT)	Input power	Horsepower
88021703	88021903	88022003	SC050	1.5 inch 50mm	1.5 inch 50mm	0.51kW	0.5hp
88021704	88021904	88022004	SC075	1.5 inch 50mm	1.5 inch 50mm	0.75kW	0.75hp
88021705	88021905	88022005	SC100	1.5 inch 50mm	1.5 inch 50mm	0.97kW	1.0hp
88021707	88021907	88022007	SC150	1.5 inch 50mm	1.5 inch 50mm	1.30kW	1.5hp
88021708	88021908	88022008	SC200	1.5 inch 50mm	1.5 inch 50mm	1.71kW	2.0hp
88027005	88027205	88027305	SC100(B)	1.5 inch 50mm 2 inch 63mm	1.5 inch 50mm	0.97kW	1.0hp
88027007	88027207	88027307	SC150(B)	1.5 inch 50mm 2 inch 63mm	1.5 inch 50mm	1.30kW	1.5hp
88027008	88027208	88027308	SC200(B)	1.5 inch 50mm 2 inch 63mm	1.5 inch 50mm	1.71kW	2.0hp

Model No	A mm	B mm	C mm	Capacitance 220V	Capacitance 110V	Weight(kg)
SC050	600	240	370	14μF	40μF	10.40
SC075	600	240	370	20μF	60μF	12.10
SC100	600	240	370	25μF	90μF	13.40
SC150	600	240	370	25μF	90μF	14.90
SC200	600	240	370	30μF	90μF	15.40
SC100(B)	610	240	370	25μF	90μF	13.40
SC150(B)	610	240	370	25μF	90μF	14.90
SC200(B)	610	240	370	30μF	90μF	15.40

Photos are for reference only, contents are subject to change without prior notice.

