

CONTACT RESISTANCE METER

Model : QCRM100

Applica?on:

- Circuit Breaker
- Shunts
- Isolators
- Busbars
- Component Manufacturer
- Current Transformer Manufacturer
- Cables and Joints
- College Laboratories




Features

- True Four Terminal Measurement
- 100 Amp DC Constant Current Source
- 3.5 Digit LED display
- 0.1uOhm resolu?on
- Current Measurement (op?onal)
- Fast Response ?me
- Stable and fast measurement

Range	Resolu?on	Test Current	Accuracy
199.9 $\mu\Omega$	0.1 $\mu\Omega$	100A	$\pm 0.5\%$ of rdg + 3 Digits
1999 $\mu\Omega$	1 $\mu\Omega$	100A	$\pm 0.5\%$ of rdg + 3 Digits

Technical Specifica?on

Display	: 3 ½ Digit LED Display
Power Supply	: 230V AC, 50Hz, 1 Phase
Opera?ng Temp	: 5 deg C to 45 deg C
Temp Coefficient	: 50 PPM

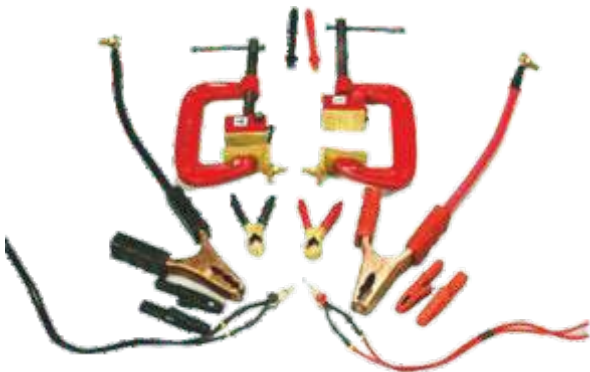

Standard Accessories

- 3m long probe set
- C clamps
- Mains Cord
- User Manual
- Master Earthing Cable

Note : Size, shape and color of the product may change without no?ce for be?erment of product and applica?on



QUADRANT MEASUREMENTS Pvt. Ltd.

Works : D 51, MIDC, Satpur, Nashik, Maharashtra, INDIA.
Email : sales@quadrantmeasurements.com
Website : www.quadrantmeasurements.com

Simplified Measurements Solutions