
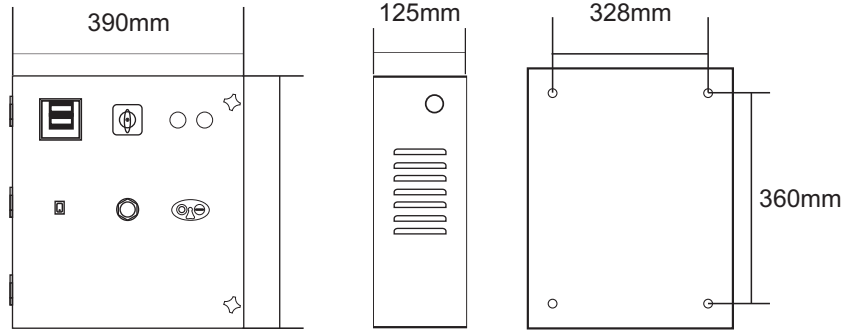


## SU-G20 Pump Controllers

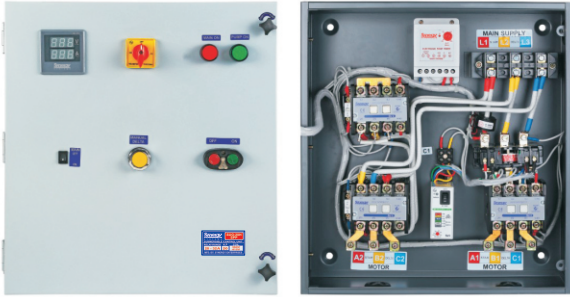

### SUG-20 SPP

**Range:**

- ❖ SU-G15 Star Delta up to 40HP

**Key Features:**

- ❖ Protection from single phasing
- ❖ Protection from overload conditions
- ❖ Protection from phase reversal
- ❖ Protection from phase unbalance 55V (+/- 5V)
- ❖ Rugged MU contactor with Open coil
- ❖ Wide band coil, operates from -50% to +110% of rated coil voltage
- ❖ Indication of healthy supply connection
- ❖ Auto restart (with 0.5Min. to 5Min.ON delay)
- ❖ Power ON and pump ON indication
- ❖ Unique dual volt-ammeter & ammeter
- ❖ Easy replacement of spares
- ❖ Terminal block and lug for easy termination

**Applications:**

- ❖ Borewell submersible water pumps
- ❖ Open well submersible pumps

HS CODE	8536
---------	------

**Type-SUG-20 Fully Automatic Star Delta Submersible Control Unit with Volt-Ampere Meter, Timer and SPP.**

CAT.NO.	Max. Motor Output at 415V, 3-Ph		Relay Max. Range (A)	Coil Voltage 50Hz/60Hz	Std. Pkg. Nos.
	HP	KW			
SUG-15 SPP	15	11	13-21	360V/415V	1
SUG-20 SPP	20	15	13-21	360V/415V	1
SUG-20H SPP	20(H)	15	20-32	360V/415V	1
SUG-25 SPP	25	18.5	20-32	360V/415V	1