


21.5" Modular HMI Panel PC with Intel® Celeron® J1900/ N2807 Processor



Features

- 21.5" WXGA (1920 x 1080) Color TFT LCD Display
- Intel® N2807/J1900 Processor
- P-CAP or Resistive Touch Support
- 2-point Multi-touch
- Aluminum Design
- IP65 Compliant Front Bezel
- Fanless Operation
- Power Input Protection: Over-Voltage Protection, Low-Voltage Protection, Reverse-Voltage Protection
- Easily Expandable I/O by AAEON OMNI I/O Modules

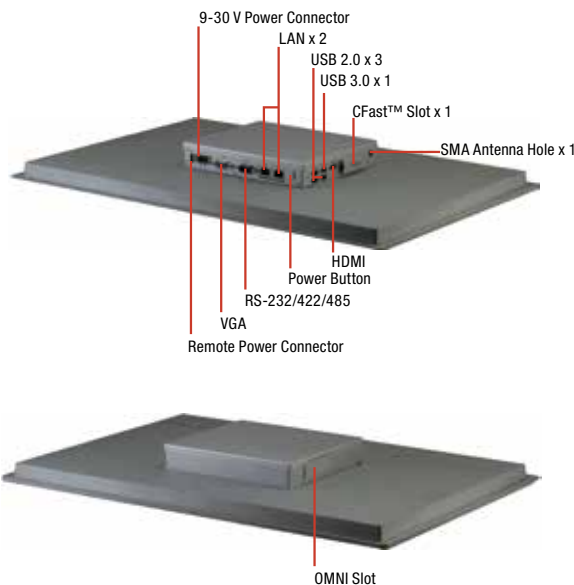


Specifications

System	
Processor	Intel® N2807 processor, 1.58 GHz, Intel® J1900 processor, 2 GHz
System Memory	204-Pin DDR3L SODIMM x 1, default 2 GB, up to 8 GB (J1900) 204-Pin DDR3L SODIMM x 1, default 2 GB, up to 4 GB (N2807)
LCD/CRT controller	Integrated in processor
Ethernet	10/100/1000Base-TX, RJ-45 x 2
I/O Port	DB9 Type RS-232/422/485 x 1 USB 2.0 x 3 USB 3.0 x 1 HDMI x 1 RJ-45 10/100/1000 LAN x 1 Lockable power input connector Power switch x 1
Storage Disk Drive	CFast™ x 1, 2.5" SATA HDD bay x 1
Expansion Slot	Full size Mini-Card x 2
OS support	Window® 7, Window® 8.1, Window® 10, Linux kernel 2.6.3 or above
Mechanical	
Construction	Aluminum design
Mounting	VESA 100/ Panel mount
Dimension	—
Carton Dimension	—
Gross Weight	—
Environmental	
Operating Temperature	-20°C~60°C with industrial grade device (with 0.5 m/s air flow, according to IEC68-2-14, CPU: N2807) -20°C~55°C with industrial grade device (with 0.5 m/s air flow, according to IEC68-2-14, CPU: J1900)
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Humidity	90% @40°C, non-condensing
Vibration	1 Grms / 5~ 500Hz / operation – with HDD
Shock	15G peak acceleration (11 msec. duration) – with HDD
EMC	CE/FCC class A
Power Supply	
DC input	DC9~30V, with lockable power adapter
LCD	
Display type	21.5" TFT-LCD, LED
Max Resolution	1920 x 1080
Max. Colors	16.7M colors (6/8-bit for R,G,B)
Luminance	400 cd/m ²
Viewing Angle	160°(H), 140°(V)
Back Light	LED
Back Light MTBF (hours)	50,000
Touchscreen	
Type	5-wire resistive Projective capacitive multi-touch (2-point)
Light Transmission	90%

OMNI-2215-BT

Dimension

Unit: mm

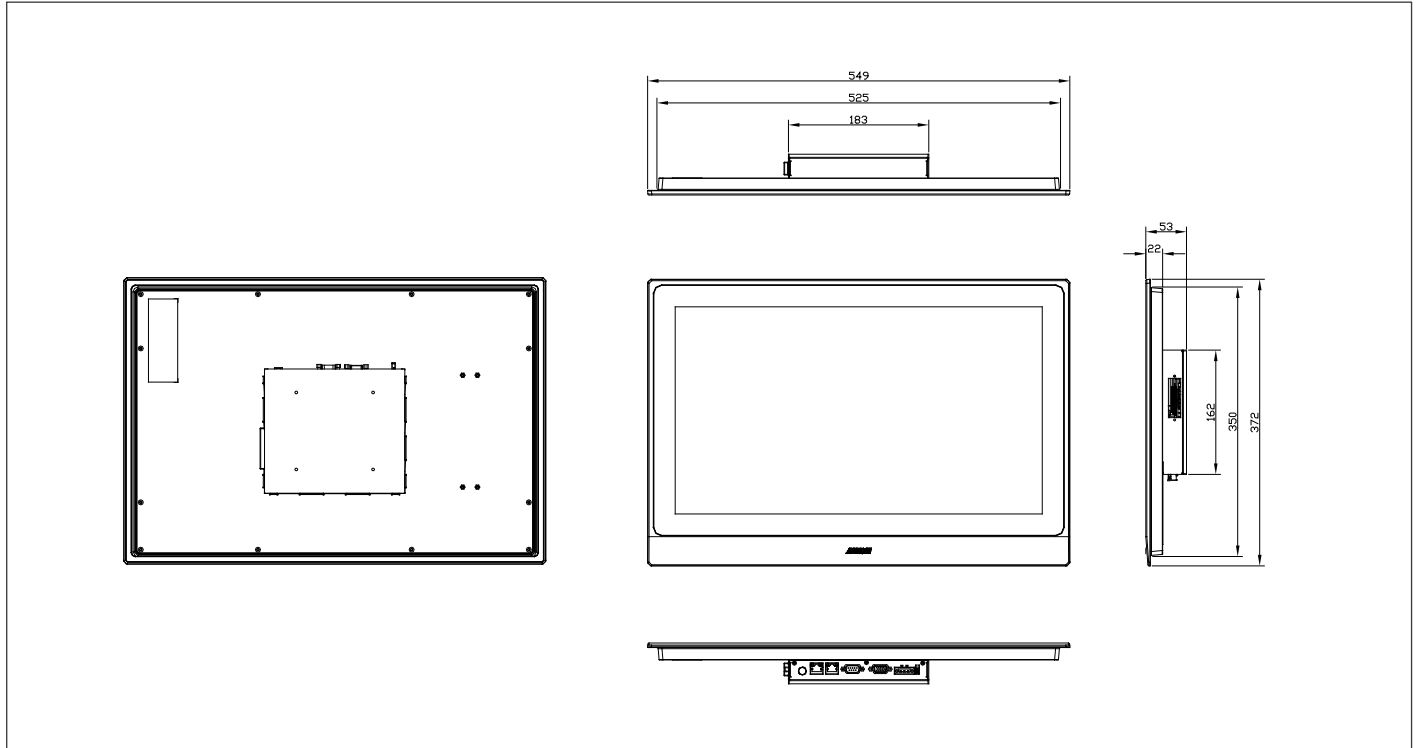

Ordering Information

Part Number	Display Type	Max Resolution	Lumi-nance	View Angle	Backlight MTBF	CPU	LAN	USB 3.0	USB 2.0	RS-232	RS-232/422/485	Storage	RAM	Display	Expansion	Mounting	Power	Temp.	Touch
OMNI-2215HTT-A1-1010	21.5" TFT-LCD	1920 x 1080	250 cd/m2	170°(H) / 160°(V)	50,000	Intel® Celeron® J1900, 2 GHz	2	1	3	0	1	CFast™ x 1 2.5" SATA HDD x 1	Support 204-Pin, DDR3L, up to 8 GB	VGA x 1	Mini-Card x 2 (Full Size)	VESA 100/ Panel mount	DC 9-30V	-20°C~55°C with airflow	5-wire resistive
OMNI-2215HTT-A2-1010	21.5" TFT-LCD	1920 x 1080	250 cd/m2	170°(H) / 160°(V)	50,000	Intel® N2807, 1.58 GHz	2	1	3	0	1	CFast™ x 1 2.5" SATA HDD x 1	Support 204-Pin, DDR3L, up to 4 GB	VGA x 1	Mini-Card x 2 (Full Size)	VESA 100/ Panel mount	DC 9-30V	-20°C~60°C with airflow	5-wire resistive
OMNI-2215HTT-A3-1010	21.5" TFT-LCD	1920 x 1080	250 cd/m2	170°(H) / 160°(V)	50,000	Intel® Celeron® J1900, 2 GHz	2	1	3	0	1	CFast™ x 1 2.5" SATA HDD x 1	Support 204-Pin, DDR3L, up to 8 GB	VGA x 1	Mini-Card x 2 (Full Size)	VESA 100/ Panel mount	DC 9-30V	-20°C~55°C with airflow	Projected capacitive
OMNI-2215HTT-A4-1010	21.5" TFT-LCD	1920 x 1080	250 cd/m2	170°(H) / 160°(V)	50,000	Intel® N2807, 1.58 GHz	2	1	3	0	1	CFast™ x 1 2.5" SATA HDD x 1	Support 204-Pin, DDR3L, up to 4 GB	VGA x 1	Mini-Card x 2 (Full Size)	VESA 100/ Panel mount	DC 9-30V	-20°C~55°C with airflow	Projected capacitive

Note: * RAM not included * Panel Mount Kit (Optional)

Packing List

- Phoenix Power Connector
- Product DVD
- OMNI-2215-BT

Optional Accessories

- **AP-0T9789LA1000**
LCD monitor Stand 230mm, LA-100
- **1702031802**
Power Cord (US Type)
- **1702031803**
Power Cord (European Type)
- **170203180E**
Power Cord (Japanese Type)
- **1255900841**
12V 84W Power Adapter w/ 3pin Terminal Block
- **9741215509**
Panel Mount Kit
- **1700021500**
Remote Switch Cable, 150 cm

OMNI Module (With AAEON Interface)

- **9741215501**
WiFi & SIM Card Module (Mini-Card WiFi Module is not Included)
- **9741215502**
Dual LAN Module
- **9741215503**
USB / COM / LAN Module
- **9741215504**
COM Port Module
- **9741215505**
Isolated COM Port module
- **9741215506**
DIO Module
- **9741215507**
CAN Bus Module
- **9741215508**
Audio Module

Wide Temperature DRAM

- **9761215500**
2GB Wide Temperature DRAM (-40°C ~ 95°C)
 - **9761215501**
4GB Wide Temperature DRAM (-40°C ~ 95°C)
 - **9761215502**
8GB Wide Temperature DRAM (-40°C ~ 95°C)
- **Users should select the wide temperature DRAM above and use wide temperature storage devices if the OMNI panel pc is to be operated at over 40°C.