
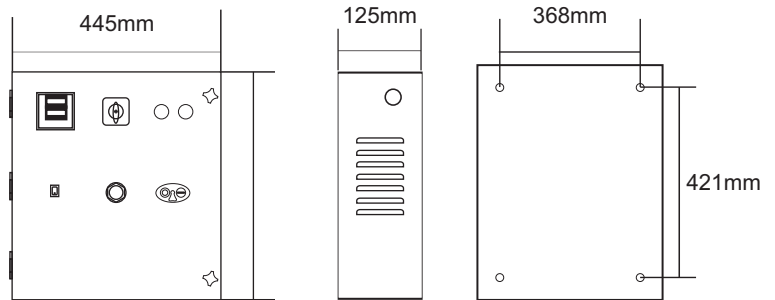


SU-G20 Pump Controllers

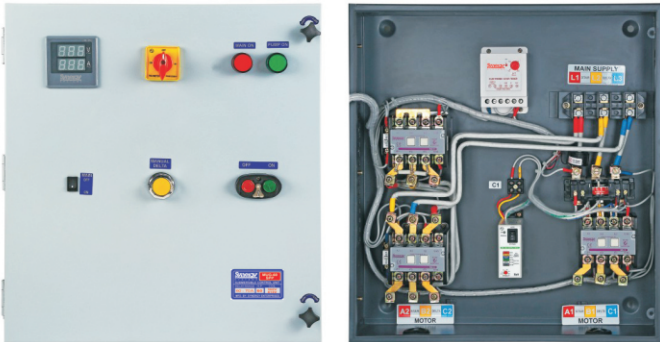

SUG-30 SPP

Range:

- ✦ SU-G15 Star Delta up to 40HP

Key Features:

- ✦ Protection from single phasing
- ✦ Protection from overload conditions
- ✦ Protection from phase reversal
- ✦ Protection from phase unbalance 55V (+/- 5V)
- ✦ Rugged MU contactor with Open coil
- ✦ Wide band coil, operates from -50% to +110% of rated coil voltage
- ✦ Indication of healthy supply connection
- ✦ Auto restart (with 0.5Min. to 5Min.ON delay)
- ✦ Power ON and pump ON indication
- ✦ Unique dual volt-ammeter & ammeter
- ✦ Easy replacement of spares
- ✦ Terminal block and lug for easy termination

Applications:

- ✦ Borewell submersible water pumps
- ✦ Open well submersible pumps

HS CODE 8536

Type-SUG-30 Fully Automatic Star Delta Submersible Control Unit with Volt-Ampere Meter, Timer and SPP.

CAT.NO.	Max. Motor Output at 415V, 3-Ph		Relay Max. Range (A)	Coil Voltage 50Hz	Std. Pkg. Nos.
	HP	KW			
SUG-30 SPP	30	22.5	20 - 32A	360V/415V	1
SUG-40 SPP	40	30	28 - 42A	360V/415V	1