


END SEALING FERRULES

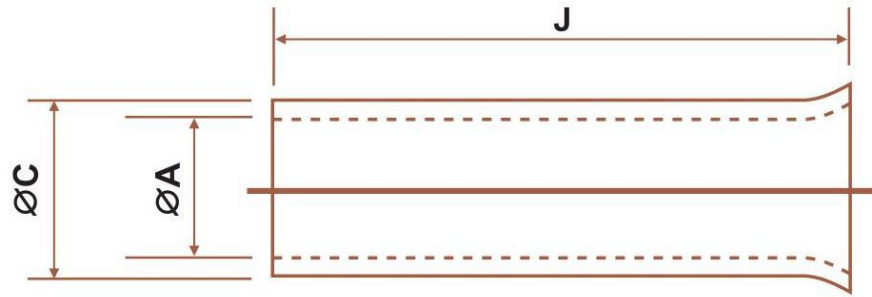

MATERIAL : ELECTROLYTIC COPPER BS 1977 / IS 191 (PART V)
FINISH : ELECTRO TINNED

MM ²	ØA	ØC	J	CAT NO
0.5	1.0 - 1.1	1.4 - 1.5	6	KK-508
0.75	1.4 - 1.5	1.8 - 1.9	6	KK-509
1.0	1.6 - 1.7	2.0 - 2.1	6	KK-510
1.0	1.6 - 1.7	2.0 - 2.1	10	KK-511
1.5	1.8 - 1.9	2.2 - 2.3	7	KK-512
1.5	1.8 - 1.9	2.2 - 2.3	10	KK-513
2.5	2.3 - 2.4	2.7 - 2.8	7	KK-514
2.5	2.3 - 2.4	2.7 - 2.8	12	KK-515
4.0	2.8 - 2.9	3.2 - 3.3	9	KK-516
4.0	2.8 - 2.9	3.2 - 3.3	12	KK-517
6.0	3.7 - 3.8	4.1 - 4.2	10	KK-518
6.0	3.7 - 3.8	4.1 - 4.2	12	KK-519
6.0	3.7 - 3.8	4.1 - 4.2	15	KK-520
10	4.6 - 4.7	5.0 - 5.1	12	KK-521
10	4.6 - 4.7	5.0 - 5.1	15	KK-522
10	4.6 - 4.7	5.0 - 5.1	18	KK-523
16	5.9 - 6.0	6.3 - 6.4	12	KK-524
16	5.9 - 6.0	6.3 - 6.4	15	KK-525
16	5.9 - 6.0	6.3 - 6.4	18	KK-526
25	7.3	7.7	16	KK-527
35	8.3	8.7	16	KK-528