OIL PREPARATION UNITS

SAIFEE COMBUSTION EQUIPMENT

SPH DPH DPDH

SAIFEE OIL PUMPING AND HEATING

UNITS supply fuel oil at a predetermined constant pressure and temperature to ensure efficient combustion. These compact units prevent undesirable variations in temperature caused by heat loss and varying rates of oil flow in long oil lines from heaters located at considerable distances.


SIMPLEX MODEL SPH

One motorized rotary gear oil pump, one preheater and two simplex filters (one fitted in line, the other supplied loose to be fitted in outgoing line).

DUPLEX MODEL DPH

Two motorized rotary gear oil pumps (one working and one standby), one preheater and two simplex filters (one fitted in line, the other supplied loose to be fitted in the outgoing line).

SPH and DPH can be ordered with optional duplex filter at extra cost.

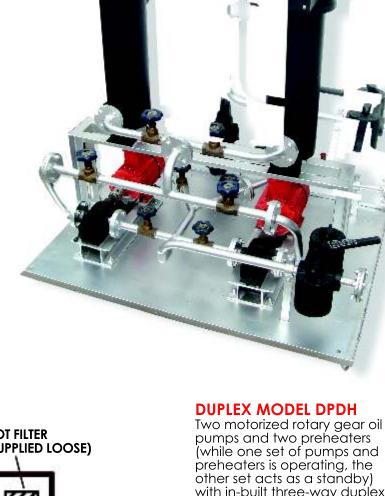

PUMP HOT FILTER IN-BUILT PRESSURE WITH MOTOR (SUPPLIED LOOSE) **RELIEF VALVE FROM TANK ELECTRIC PREHEATER** TO RING MAIN **EMERGENCY PRESSURE GLOBE VALVE** REGULATING VALVE **ISOLATING VALVE PRESSURE** TO BURNER GAUGE RETURN FROM RING MAIN

pumps and two preheaters (while one set of pumps and preheaters is operating, the other set acts as a standby) with in-built three-way duplex

Saifee Pumping and Heating unit are generally manufactured as per the schematic shown on the left. The components are mounted on an MS tray and the units are supplied complete with necessary interconnecting pipe work.

Standard units are available in sizes from 1 kW to 90 kW. Nonstandard units can be designed on request.

AIFEE ENGINEERING INDUSTRIES

135A BIPLABI RASH BIHARI BASU ROAD KOLKATA 700001, INDIA TEL: +91 (33) 40245786 MOBILE: +91 9883038252 EMAIL: saifeeengind@gmail.com WEBSITE: www.saifeegroup.com WHATSAPP: +91 9883038252 Information in this document is non-binding and subject to modification