




www.swastiklugs.in  
spsslugs@yahoo.in

## SWASTIK COMPRESSION TYPE ALUMINIUM TUBULAR INLINE CONNECTORS FOR ALUMINIUM FOR ALUMINIUM CONDUCTORS AS PER IS-8308

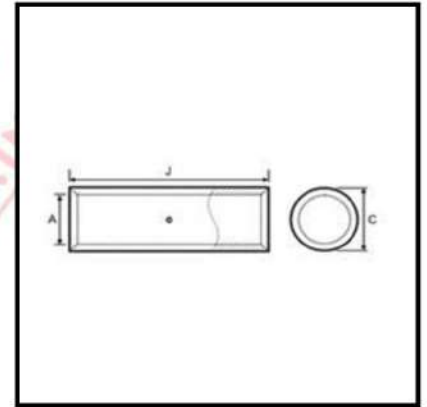


Area mm <sup>2</sup>	Cable Size	DIMENSIONS (MM)			Swastik Cat No.
		A	C	J	
2.5	1/1.8	1.9-2.1	5.4-5.6	16	SAS 145
2.5	3/1.06	2.5-2.7	5.4-5.6	16	SAS 006
4	7/0.85	2.8-3.0	5.4-5.6	16	SAS 005
6	7/1.12	3.4-3.6	5.4-5.6	16	SAS 013
10	1/3.55	3.7-3.9	6.1-6.3	20	SAS 146
10	7/1.4	4.3-4.5	7.1-7.3	20	SAS 014
16	7/1.7	5.3-5.5	8.2-8.4	26	SAS 004
25	7/2.24	6.8-7.1	9.6-9.8	35	SAS 003
35	7/2.5	7.8-8.1	10.7-10.9	40	SAS 002
50	19/1.8	9.1-9.4	12.9-13.1	45	SAS 012
70	19/2.24	11.1-11.4	15.4-15.6	55	SAS 001
95	19/2.5	13.0-13.3	17.3-17.5	60	SAS 015
120	37/2.06	14.5-14.9	19.5-19.7	65	SAS 009

Tolerance =  $\pm 5\%$



www.swastiklugs.in  
spsslugs@yahoo.in

## SWASTIK COMPRESSION TYPE ALUMINIUM TUBULAR INLINE CONNECTORS FOR ALUMINIUM FOR ALUMINIUM CONDUCTORS AS PER IS-8308

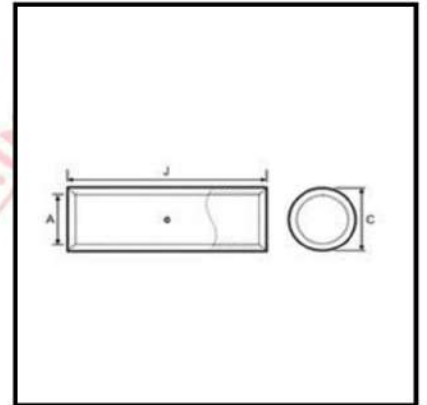

Area mm <sup>2</sup>	Cable Size	DIMENSIONS (MM)			Swastik Cat No.
		A	C	J	
150	37/2.24	16.2-16.6	21.4-21.6	70	SAS 010
185	37/2.5	18.2-18.6	23.9-24.1	75	SAS 011
225	37/2.8	20.2-20.5	26.6-27.0	85	SAS 147
240	37/3.0	20.7-21.3	27.9-28.2	90	SAS 016
300	61/2.5	23.5-24.1	30.9-31.2	100	SAS 017
400	61/3.0	26.5-27.1	35.4-35.7	115	SAS 018
500	91/2.65	29.5-30.2	40.9-41.2	125	SAS 019
625	91/3.30	34.5-35.2	45.9-46.2	140	SAS 020
800	91/3.35	38.5-39.2	50.9-51.2	160	SAS 148
1000	91/3.75	43.0-43.7	56.8-57.2	210	SAS 149

**Tolerance = ± 5%**